

DOWNLIGHT



TECO

IP 20	CRI 90+	PF ≥0.9	AC220-240V	Dimmable	Anti-Glare
-----------------	-------------------	-------------------	-------------------	-----------------	-------------------



TECO DOWNLIGHT

- 1 - Mini size in 33mm/45mm/60mm.
- 2 - Precise beam angles in 15°/24°/36° with smooth and concentric speckle.
- 3 - Different mounting types: track mounting, surface-mounted, recessed-mounted, half recessed-mounted, pendant downlight, trim&trimless.
surface-mounted, recessed-mounted,
half recessed-mounted, pendant downlight, trim&trimless.
Anti-glare structure for maximum eye comfort.
- 4 - Special design in vertical texture suits for decorative style.
Aluminum. with painting finishing



References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions	Adjustable
LX-DL-2550A-LED	1*3W	180lm	2700K/3000K/3500K/4000K	15°/24°/36°	IP20	Ø55*94mm	90°
LX-DL-2560A-LED	1*7W	420lm				Ø66*125mm	
LX-DL-2575A-LED	1*18W	1080lm				Ø82*183mm	


Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

OPTICS




HOUSING IN DIFFERENT COLOR

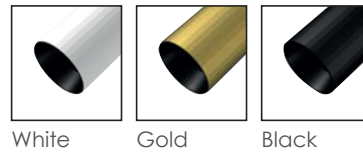


Dimensions


LX-DL-2550A-LED

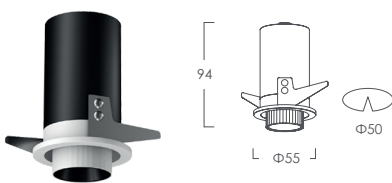

LX-DL-2560A-LED

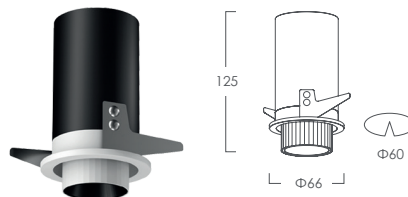

LX-DL-2575A-LED

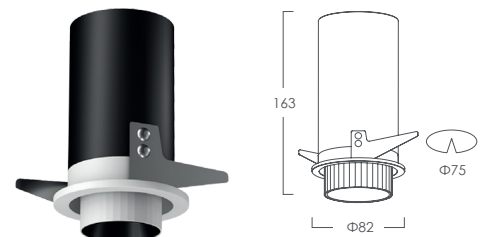

Features

The diagram illustrates the adjustable beam angle feature of a Luxio lighting fixture. A central screwdriver is shown inserted into the fixture's internal mechanism, which is shown in a cutaway view. The beam angle is adjustable from 15° to 36°. A diameter of $\Phi 45\text{mm}$ is indicated. Two inset images show the internal mechanism for fixed and adjustable beam angles.

Adjustable beam angle

15°
24°
36°

$\Phi 45\text{mm}$

Beam angle can be freely adjusted from 15°~36° via screw driver

Fixed angle : 15° / 24° / 36°

Adjustable beam angle 15°~36°