

Garden Light



Référence: LX-FL-30-2-19W

Matériau : Aluminium

Durée de vie : 50 000 Heures



Caractéristiques Electriques

Puissance : 19W

Alimentation : AC120-240V

Fréquence : 50-60HZ

Indice de protection : IP 66

Indice IK : IK06

Option Dimmable : Triac/PWM/1-10V/Dali

Caractéristiques de la LED

Marque de LED : NICHIA


Flux Lumineux : 1 855-2 017 Lm

Couleur de la LED : 2000K/3000K/6000K


Angle: 20°

Autre

Dimensions : Ø120xW173xH227mm

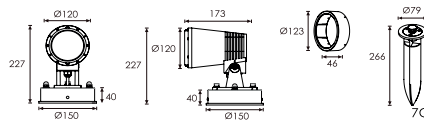

Direction du faisceau réglable

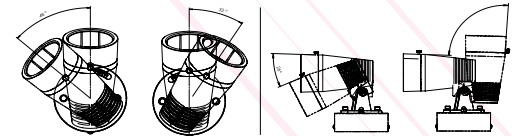

OPTIONS DE COULEURS

Basic



Gris foncé sablé

Secondary



Gris Argenté



Noir sablé



Blanc poncé

Garden Light

Accessoires



Horizontal ±30°

Vertical ±30°

Support

Boîte de jonction étanche

Structure de rayonnement thermique

Pique en option

Pique en option

Support en option

The main image shows a garden light with a lens containing two green LEDs. Dotted lines connect callout boxes to specific parts of the light: the lens area, the mounting bracket, the base, the heat sink, and the mounting spike. The callouts show: 1) A top-down view of the lens with horizontal adjustment arrows. 2) A side view of the lens with vertical adjustment arrows. 3) A cylindrical support ring. 4) An open waterproof junction box showing internal wiring. 5) A close-up of the heat sink structure. 6) A long, pointed mounting spike. 7) A diagram showing the spike being added to the light's base. 8) A diagram showing the support ring being added to the light's base.