

luxio
LIGHTING

C a t a l o g u e I n d o o r

 Indoor

luxio
L I G H T I N G

Z.Ain Attig N°9 - Province Skhirat - Temara
Tel : +212 5 37 74 99 16
Fax : +212 5 37 74 99 18
Email : info@luxio-lighting.com
Site : www.luxio-lighting.com

024



DOWNLIGHT

134



WALL LIGHT

146



PROFIL LIGHT

196



DECORATIVE

CORNE DOWNLIGHT



LX-DL-11011-LED
LX-DL-11012-LED
LX-DL-11361-LED
LX-DL-11362-LED
LX-DL-11611-LED
LX-DL-11612-LED



LX-DL-11013-LED
LX-DL-11363-LED
LX-DL-11613-LED



LX-DL-11014-LED
LX-DL-11015-LED
LX-DL-11364-LED
LX-DL-11365-LED
LX-DL-11614-LED
LX-DL-11615-LED



LX-DL-11016-LED
LX-DL-11366-LED
LX-DL-11616-LED



LX-DL-W5640FT-LED
LX-DL-W5750FT-LED
LX-DL-W5860FT-LED
LX-DL-W5970FT-LED



LX-DL-W6050AT-LED
LX-DL-W6160AT-LED
LX-DL-W6270AT-LED



LX-DL-01075F-LED
LX-DL-W01075FT-LED
LX-DL-01075FS-LED
LX-DL-W01075FST-LED



LX-DL-01075A-LED
LX-DL-W01075AT-LED
LX-DL-01075AS-LED
LX-DL-W01075AST-LED



LX-DL-W11011-LED
LX-DL-W11012-LED
LX-DL-W11361-LED
LX-DL-W11362-LED
LX-DL-W11611-LED
LX-DL-W11612-LED



LX-DL-W11014-LED
LX-DL-W11015-LED
LX-DL-W11364-LED
LX-DL-W11365-LED
LX-DL-W11614-LED
LX-DL-W11615-LED



LX-DL-05105F-LED
LX-DL-05105A-LED
LX-DL-06150F-LED
LX-DL-06150A-LED



LX-DL-7475F-LED
LX-DL-75105F-LED
LX-DL-76125F-LED
LX-DL-77160F-LED



LX-DL-5360F-LED
LX-DL-5480F-LED
LX-DL-55120F-LED
LX-DL-56160F-LED



LX-DL-5255A-LED
LX-DL-5375A-LED
LX-DL-5495A-LED
LX-DL-55125A-LED

MODULAR DOWNLIGHT



LX-DL-03MZ-LED
LX-DL-04MZ-LED
LX-DL-05MZ-LED



LX-DL-0835F-LED
LX-DL-0945A-LED
LX-DL-1050F-LED
LX-DL-1155F-LED
LX-DL-1260A-LED
LX-DL-1375A-LED



LX-DL-0180F-LED
LX-DL-0180A-LED
LX-DL-0280FS-LED
LX-DL-0380A-LED
LX-DL-0480F-LED



LX-DL-02055F-LED
LX-DL-02055A-LED
LX-DL-03065F-LED
LX-DL-03065A-LED
LX-DL-04075F-LED
LX-DL-04075A-LED



LX-DL-0921-LED-5W
LX-DL-W0922-LED-5W



LX-DL-W0626-A-LED-8W



LX-DL-W0736-LED
LX-DL-W0626-B-LED-8W



LX-DL-W0725-LED-8W

HOTEL SERIES DOWNLIGHT



LX-DL-7175A-LED
LX-DL-7295A-LED
LX-DL-73115A-LED



LX-DL-1565A-LED
LX-DL-1675A-LED
LX-DL-24100A-LED



LX-DL-5635F-LED
LX-DL-5740F-LED
LX-DL-5850F-LED
LX-DL-5960F-LED



LX-DL-6040A-LED
LX-DL-6150A-LED
LX-DL-6260A-LED



LX-DL-1021-LED-5W
LX-DL-0621-LED-8W
LX-DL-0631-LED
LX-DL-0641-LED-21W
LX-DL-0651-LED-28W



LX-DL-W0627-LED-8W
LX-DL-W0628-LED-8W
LX-DL-W0724-LED-8W
LX-DL-W0637-LED
LX-DL-W0638-LED
LX-DL-W0737-LED




LX-DL-W0625-LED-8W
LX-DL-W0635-LED
LX-DL-W0636-LED
LX-DL-W0734-LED
LX-DL-W0642-LED-21W
LX-DL-W0652-LED-28W



LX-DL-0623-LED-8W
LX-DL-0633-LED



LX-DL-1022-LED-5W
59

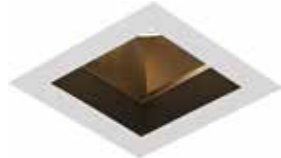

LX-DL-0733-LED
59



LX-DL-0624-LED-8W
LX-DL-0634-LED
LX-DL-0722-LED-8W
59



LX-DL-W0629-LED-8W
LX-DL-W0639-LED
LX-DL-W0643-LED-21W
LX-DL-W0653-LED-28W
60



LX-DL-44065F-LED
LX-DL-45090F-LED
LX-DL-46115F-LED
LX-DL-47160F-LED
LX-DL-48195F-LED
66



LX-DL-7875F-LED
LX-DL-7990F-LED
LX-DL-80125F-LED
LX-DL-81150F-LED
LX-DL-82200F-LED
68



LX-DL-1391-LED
LX-DL-1392-LED
69



LX-DL-1931-LED-10W
69



LX-DL-0620-LED-8W
LX-DL-0630-LED
LX-DL-0644-LED-21W
LX-DL-0654-LED-28W
61



LX-DL-018-LED
LX-DL-017-LED
62



LX-DL-1802-LED
62



LX-DL-W017-LED
LX-DL-W018-LED
62



LX-DL-1341-LED-10W
LX-DL-1342-LED-20W
LX-DL-1343-LED-45W
70



LX-DL-1351-LED-21W
LX-DL-1352-LED-42W
LX-DL-1353-LED-63W
70



LX-DL-1881-LED
LX-DL-1882-LED
LX-DL-1883-LED
LX-DL-1884-LED
70



LX-DL-11101-LED
LX-DL-11501-LED
LX-DL-11751-LED
LX-DL-11951-LED
LX-DL-12201-LED
71



LX-DL-1801-LED
62



LX-DL-W11016-LED
62



LX-DL-1903-LED
63



LX-DL-1904-LED
63



LX-DL-11102-LED
LX-DL-11502-LED
LX-DL-11752-LED
LX-DL-11952-LED
LX-DL-12202-LED
71



LX-DL-25125F-LED
LX-DL-25125L-LED
73



LX-DL-11017-LED
63



LX-DL-1902-LED
63



LX-DL-11601-LED
LX-DL-11602-LED
LX-DL-W11601-LED
LX-DL-W11602-LED

76



LX-DL-11861-LED
LX-DL-11862-LED
LX-DL-W11861-LED
LX-DL-W11862-LED

76



LX-DL-12231-LED
LX-DL-12232-LED
LX-DL-W12231-LED
LX-DL-W12232-LED

77



LX-DL-2111
LX-DL-W2211

86



LX-DL-2112
LX-DL-W2212

86



LX-DL-2113
LX-DL-W2213

86



LX-DL-2161-LED
LX-DL-W2761-LED

87



LX-DL-12751-LED

78



LX-DL-12752-LED

78



LX-DL-2162-LED
LX-DL-W2762-LED

87



LX-DL-2163-LED
LX-DL-W2763-LED

87



LX-DL-2261-LED
LX-DL-W2661-LED

87



LX-DL-2262-LED
LX-DL-W2662-LED

87



LX-DL-01075W-LED
LX-DL-W01075WT-LED
LX-DL-01075WS-LED
LX-DL-W01075WST-LED

80



LX-DL-1222-LED

80



LX-DL-13051-LED
LX-DL-12091-LED
LX-DL-11131-LED
LX-DL-W13051-LED
LX-DL-W12091-LED
LX-DL-W11131-LED

81



LX-DL-1327-LED-7.5W
LX-DL-1328-LED-15W
LX-DL-1329-LED-22.5W

82



LX-DL-2263-LED
LX-DL-W2663-LED

87



LX-DL-2811-LED
LX-DL-W2811-LED

88



LX-DL-2812-LED
LX-DL-W2812-LED

88



LX-DL-2813-LED
LX-DL-W2813-LED

88



LX-DL-1321-LED-1.5W
LX-DL-1322-LED-3W
LX-DL-1323-LED-4.5W
LX-DL-1324-LED-7.5W
LX-DL-1325-LED-15W
LX-DL-1326-LED-22.5W

82



LX-DL-2911-LED
LX-DL-W2911-LED

89



LX-DL-2912-LED
LX-DL-W2912-LED

89



LX-DL-2913-LED
LX-DL-W2913-LED

89



LX-DL-C661220-LED
LX-DL-C661230-LED
LX-DL-C661242-LED

91



LX-DL-C6331

91



LX-DL-H993815-LED
LX-DL-H9938-LED

92



LX-DL-C6761202-LED
LX-DL-C6761302-LED
LX-DL-6761452-LED

93



LX-DL-0521-LED
LX-DL-0531-LED-21W
LX-DL-0541-LED-28W

101



LX-DL-2240A-LED
LX-DL-2340A-LED
LX-DL-2440A-LED

102



LX-DL-0203A-LED
LX-DL-0207A-LED
LX-DL-0218A-LED

106



LX-DL-0603A-LED
LX-DL-0607A-LED
LX-DL-0618A-LED

106



LX-DL-C6771

95



LX-DL-C6711

95



LX-DL-C6871-LED

95



LX-DL-C6891-LED

95



LX-DL-0407A-LED
LX-DL-0418A-LED

107



LX-DL-0514A-LED
LX-DL-0536A-LED

107



LX-DL-0321-LED-10W

108



LX-DL-0322-LED-10W
LX-DL-0331-LED-21W

108



LX-DL-C6801

96



LX-DL-C6721

96



LX-DL-C6721-LED

96



LX-DL-C6722-LED

97



LX-DL-0341-LED-28W

108



LX-DL-0421-LED
LX-DL-W0422-LED

109



LX-DL-0431-LED
LX-DL-W0432-LED

109



LX-DL-0441-LED
LX-DL-W0442-LED

109



LX-DL-C6723-LED

97



LX-DL-2675A-LED
LX-DL-W2675AT-LED
LX-DL-2690A-LED
LX-DL-W2690AT-LED
LX-DL-26105A-LED
LX-DL-W26105AT-LED

98



LX-DL-27110A-LED
LX-DL-W27110AT-LED
LX-DL-26135A-LED
LX-DL-W26135AT-LED
LX-DL-25165A-LED
LX-DL-W25165AT-LED

98



LX-DL-2550A-LED
LX-DL-2560A-LED
LX-DL-2575A-LED

100



LX-DL-0323-LED
LX-DL-0324-LED

110



LX-DL-0334-LED-15W

110



LX-DL-0335-LED-21W

110



LX-DL-0344-LED-28W

110

TRACK LIGHT



LX-DL-1731A-LED-15W

110



LX-DL-0332-LED-15W

110



LX-DL-0333-LED-15W

110



LX-DL-0342-LED-21W

110



LX-DL-C8161

115



LX-DL-C8011

115



LX-DL-C8021-LED

115



LX-DL-D8081

116



LX-DL-2351-LED-21W

110



LX-DL-C8351-LED

116



LX-DL-C8341-LED

116



LX-DL-D8111-LED

117



LX-DL-D812120-LED
LX-DL-D812130-LED

117



LX-DL-D8051-LED

112



LX-DL-0221-LED-10W

114



LX-DL-0222-LED-10W

114



LX-DL-0231-LED-21W

114



LX-DL-C8321-LED

117



LX-DL-EM79-LED
LX-DL-EM712-LED
LX-DL-EE718-LED
LX-DL-EE728-LED

118



LX-DL-EME79-LED
LX-DL-EME712-LED
LX-DL-EE2718-LED
LX-DL-EE2728-LED

119



LX-DL-0241-LED-28W

114



LX-DL-1731-LED-15W

114



LX-DL-0232-LED-15W

114



LX-DL-0233-LED-15W

114



LX-DL-2011-LED-10W

123



LX-DL-2012-LED-10W
LX-DL-2026-LED-12W
LX-DL-2029-LED-24W

123



LX-DL-2014-LED-10W

123



LX-DL-2015-LED-10W

123


MAGNETIC TRACK LIGHT

			
LX-DL-2016-LED-10W 123	LX-DL-2017-LED-10W 123	LX-DL-2018-LED-10W 124	LX-DL-2013-LED-10W 124


LX-DL-2019-LED-10W 124

			
LX-DL-1681 128	LX-DL-1685 128	LX-PEN-1688 128	LX-WL-16110-S-2W LX-WL-16120-M LX-WL-16130-L 132

			
LX-WL-W10-11W 135	LX-WL-7601-6W 135	LX-WL-6501-8W 135	LX-WL-6001-10W 135

			
LX-WL-6701-6W 135	LX-WL-5320-10W 135	LX-WL-5201-8W LX-WL-5202-10W 135	LX-WL-5501-3W 135

			
LX-WL-4501-4W 136	LX-WL-4801-8W LX-WL-4802-9W LX-WL-4803-10W 136	LX-WL-4901-8W 136	LX-WL-5601-6W 136

			
LX-WL-5602-6W 136	LX-WL-6201-6W 136	LX-WL-6801-5W 136	LX-WL-7101-6W 137



LX-WL-7301-4W

137



LX-WL-7302-7W
LX-WL-7303-7W

137



LX-WL-7401

138



LX-WL-7403-9W

138



LX-WL-7404-9W

138




LX-WL-7405-9W

138




LX-WL-7001-3.5W
LX-WL-7002-7W
LX-WL-7003-7W

138

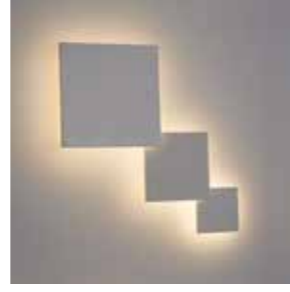

LX-WL-7502

138

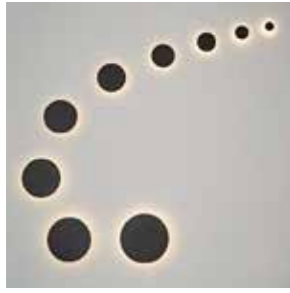

LX-WL-5008

140



LX-WL-1711-9W

141



LX-WL-0611-100W

141



LX-LI-TULIP-3W

142



LX-LI-BALL-3W

142



LX-LI-S-630210-3W

142



LX-LI-S-113-2W

142



LX-LI-S-115-2W

142



LX-LI-S-114-4W

143



LX-LI-BELL-3W

143



LX-LI-S-620320-3W

143



LX-LI-S-620310-3W

144



LX-LI-S-620303-1.2W

144



LX-LI-S-620304-1.2W

144



LX-LI-S-610101-3W

144



LX-WL-UNIT-2W

144



LX-WL-ACME-2W

144




LX-WL-FORMAT-2W

144



LX-WL-268

144

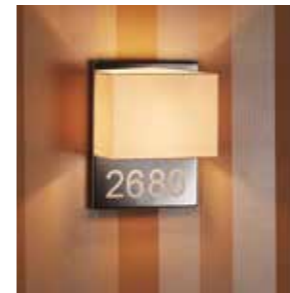

LX-WL-2680

144



LX-PL-LS3360-20W

150



LX-PL-LS4067-20W

150



LX-PL-LS5470-25W

151



LX-PL-LS7977-30W

151



LX-PL-AS3535-15W90-19.2W

165



LX-PL-AS3535-08A 360-60W
LX-PL-AS3535-15A 360-105W
LX-PL-AS3535-30A 360-210W

167




LX-PL-AS3535-15N 360-105W

167




LX-PL-AS3535-15W 360-105W

167

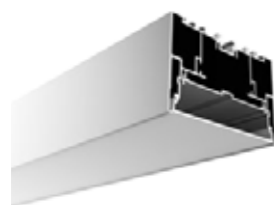


LX-PL-LS10570-40W

156

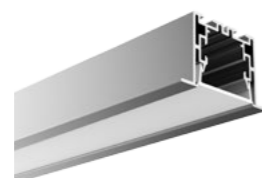


LX-PL-LE5535-20W

156

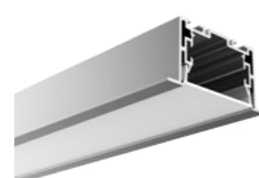

LX-PL-LE6935-25W

156

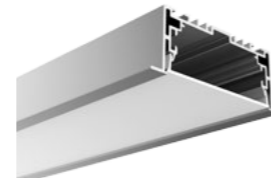

LX-PL-LE9435-30W

156



LX-PL-LS0510-5W

172



LX-PL-LG4242-13.5W

172



LX-PL-LG4747-13.5W

172



LX-PL-LG8513-8.6W

174



LX-PL-LC12843-20W

157



LX-PL-AS3535-2.5-19.2W

162



LX-PL-AS3535-8A45-19.2W

162



LX-PL-AS3535-8A90-19.2W

162



LX-PL-LC7011-13.5W

175



LX-PL-LS0709-5W

176



LX-PL-LS0812-5W

176



LX-PL-LS1607-8W
LX-PL-LS1607-13W

177



LX-PL-AS3535-15A45-19.2W

163



LX-PL-AS3535-15A90-19.2W

163



LX-PL-AS3535-30A45-19.2W

163



LX-PL-AS3535-15N90-19.2W

165



LX-PL-LS1613B-6W
LX-PL-LS1613B-13W

177



LX-PL-LS1911KB-8W
LX-PL-LS1911KB-15W

178



LX-PL-LS1911CB-8W
LX-PL-LS1911CB-15W

178



LX-PL-LS1911PB-8W
LX-PL-LS1911PB-15W

179



LX-PL-LE1212-5W

179




LX-PL-LE2507-8W
LX-PL-LE2507-13W

180




LX-PL-LR50CA
LX-PL-LR50DA

187

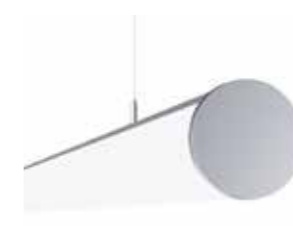

LX-PL-LT60-20W

188

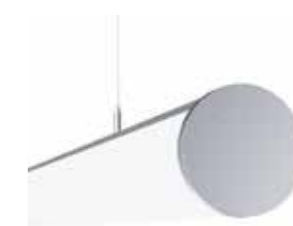


LX-PL-LT90-9.5W

188



LX-PL-LT120-36W

189

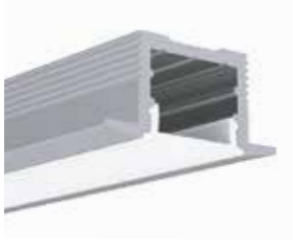

LX-PL-LE2513-6W
LX-PL-LE2513-13W

181



LX-PL-LG1616C
LX-PL-LG1515C

182




LX-PL-LG1616K-6W
LX-PL-LG1616K-13W

182




LX-PL-LG3030C-8W
LX-PL-LG3030C-15W

182

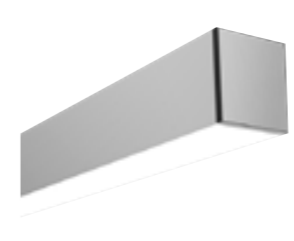


LX-PL-LS50DD

195

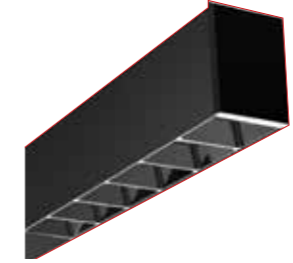


LX-PL-LS50G

195

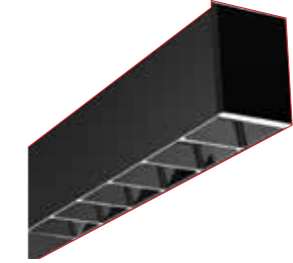

LX-PL-LS50GB

195

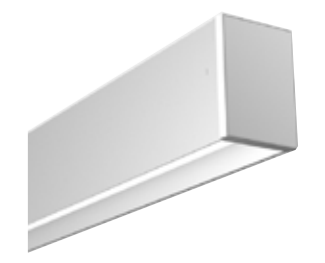

LX-PL-LS50FDG

195



LX-PL-LG3030KB-8W
LX-PL-LG3030KB-15W

182



LX-PL-LS70CA
LX-PL-LS70DA

185



LX-PL-LH70CA
LX-PL-LH70DA

185



LX-PL-LE70CA
LX-PL-LE70DA

185



LX-PL-LR70CA
LX-PL-LR70DA

185



LX-PL-LS50CA
LX-PL-LS50DA

186



LX-PL-LH50CA
LX-PL-LH50DA

186



LX-PL-LE50CA
LX-PL-LE50DA

187



LX-PEN-MS-3-110W
LX-PEN-MS-3-150W
LX-PEN-MS-3-163W
LX-PEN-MS-3-180W
196



LX-PEN-MS-1-16W
LX-PEN-MS-1-25W
LX-PEN-MS-1-36W
LX-PEN-MS-1-42W
LX-PEN-MS-1-60W
LX-PEN-MS-1-86W
LX-PEN-MS-1-100W
196



LX-PEN-MS-1-12W
LX-PEN-MS-1-24W
LX-PEN-MS-1-38W
LX-PEN-MS-1-45W
LX-PEN-MS-1-64W
LX-PEN-MS-1-67W
LX-PEN-MS-1-75W
197




LX-PEN-MS-2-65W
LX-PEN-MS-2-80W
197



LX-PEN-171-70W
202



LX-PEN-211-12W
202



LX-PEN-231-35W
202



LX-PEN-251-60W
202



LX-PEN-MS-2-60W
198



LX-PEN-MS-3-105W
198



LX-PEN-MS-4-175W
198



LX-PEN-MS-5-175W
198



LX-PEN-252-60W
202



LX-PEN-611-80W
204



LX-PEN-621-135W
204



LX-PEN-631-190W
204



LX-PEN-MS-7-340W
199



LX-PEN-3R-16.8W
LX-PEN-3R-25W
LX-PEN-6104R-25W
LX-PEN-6R-45W
LX-PEN-9R-110W
LX-PEN-2R-215W
200



LX-SRPA-3R-16.8W
LX-SRPA-4R-25W
LX-SRPA-6R-45W
LX-SRPA-9R-110W
LX-SRPA-2R-215W
201



LX-SRPA-4ER-16.8W
201



LX-PEN-911-7W
205



LX-PEN-212-9W
205



LX-PEN-211-10W
205



LX-PEN-311-8W
207



LX-PEN-111-6W
LX-PEN-112-9W
202



LX-PEN-411-6W
LX-PEN-412-9W
202



LX-PEN-431-25W
202



X-PEN-461-40W
202



LX-PEN-331-25W
207



LX-PEN-411-10W
207



LX-PEN-412-7W
207



LX-PEN-431-20W
207



LX-PEN-631-35W

208



LX-PEN-632-35W

208



LX-PEN-751-40W

208



LX-PEN-771-70W

208



LX-PEN-INDP18

215



LX-PEN-INDP11

215



LX-PEN-INDP12

125



LX-PEN-INDP10

215



LX-PEN-611-7W
LX-PEN-613-12W
LX-PEN-615-17W

209



LX-PEN-612-7W
LX-PEN-614-12W
LX-PEN-616-17W

209



LX-PEN-501-6.5W

210



LX-PEN-503-6.5W

210



LX-PEN-INDP13

215



LX-PEN-INDP17

215



LX-WL-DISH45
LX-WL-DISH70

215



LX-PEN-WICP-2
LX-PEN-WICP-6
LX-PEN-WICP-1
LX-PEN-WICP-5
LX-PEN-WICP-8
LX-PEN-WICP-7

216



LX-PEN-530-3x6.5W

210



LX-PEN-BLYP-8
LX-PEN-BLYP-7

211



LX-WL-BLYT-8
LX-WL-BLYT-7

211



LX-WL-BLYW-8
LX-WL-BLYW-7

211



LX-PEN-2008S-17W
LX-PEN-2008M-17W

213



LX-PEN-2063S-33W

213



LX-PEN-2059L-69W

213



LX-PEN-INDP17

215

CORNE DOWNLIGHT



	LX-DL-11013-LED	LX-DL-11363-LED	LX-DL-11613-LED
⚡	8W/12W/15W	15W /23W /30W	23W / 32W / 40W
💡	8W: 560lm / 12W: 757lm / 15W: 1150lm	15W: 1219lm / 23W: 1966lm / 30W: 2145lm	23W: 2273lm / 32W: 2800lm / 40W: 3400lm
🔌	220-240VAC 50/60Hz		
🌞	Citizen /Bridgelux COB		
🌈	2700K / 3000K / 4000K / 5000K		
Ra	≥80 / ≥90		
📐	70°		
🔧	Remote electronic power supply		
📷	PHASE/1-10V /DALI as options		
📏			
IP20			

	LX-DL-11011-LED	LX-DL-11012-LED	LX-DL-11361-LED	LX-DL-11362-LED	LX-DL-11611-LED	LX-DL-11612-LED
⚡	8W/12W/15W		15W/23W/30W		23W/32W/40W	
💡	8W:780Lm/12W:1050Lm/15W: 1150lm		15W: 1300Lm /23W: 2088Lm /30W: 2490Lm		23W: 2300Lm /32W: 2857Lm /40W: 3460Lm	
🔌	220-240VAC 50/60Hz					
🌞	Citizen /Bridgelux COB					
🌈	2700K / 3000K / 4000K / 5000K					
Ra	≥80 / ≥90					
📐	12° /24° /38° /60°			15° /24° /38°		
🔧	Remote electronic power supply					
📷	PHASE /1-10V / DALI as options					
📏						
IP	IP20/44	IP20	IP20/44	IP20	IP20/44	IP20





	LX-DL-11014-LED	LX-DL-11015-LED	LX-DL-11364-LED	LX-DL-11365-LED	LX-DL-11614-LED	LX-DL-11615-LED
⚡	8W / 12W / 15W		15W/23W/30W		23W/32W/40W	
💡	8W: 780lm / 12W: 1050lm / 15W: 1150lm		15W: 1300lm / 23W: 2088lm / 30W: 2490lm		23W: 2300lm / 32W: 2857lm / 40W: 3460lm	
🔌	220-240VAC 50/60Hz					
🌞	Citizen /Bridgelux COB					
🌈	2700K / 3000K / 4000K / 5000K					
Ra	≥80 / ≥90					
📐	12° / 24° / 38° / 60°			15° / 24° / 38°		
🔌	Remote electronic power supply					
🔌	PHASE /1-10V / DALI as options					
📐						
	IP 20/44	IP20	IP 20/44	IP20	IP 20/44	IP20



	LX-DL-11016-LED	LX-DL-11366-LED	LX-DL-11616-LED
⚡	8W / 12W / 15W		23W/32W/40W
💡	8W: 560lm / 12W: 757lm / 15W: 1150lm		23W: 2273lm / 32W: 2800lm / 40W: 3400lm
🔌	220-240VAC 50/60Hz		
🌞	Citizen /Bridgelux COB		
🌈	2700K / 3000K / 4000K / 5000K		
Ra	≥80 / ≥90		
📐	70°		
🔌	Remote electronic power supply		
🔌	PHASE /1-10V / DALI as options		
📐			
	IP 20/44	IP 20/44	IP 20/44



To install:

⚠️ MINIMUM CEILING THICKNESS Z:5mm
MAXIMUM CEILING THICKNESS Z:20mm ⚡ Please make sure that mains is disconnected before proceeding!

-
-
-
-
-
-




	LX-DL-W11011-LED	LX-DL-W11012-LED	LX-DL-W11361-LED	LX-DL-W11362-LED	LX-DL-W11611-LED	LX-DL-W11612-LED
⚡	8W / 12W / 15W		15W/23W/30W		23W/32W/40W	
💡	8W: 780lm / 12W: 1050lm / 15W: 1150lm		15W: 1300lm / 23W: 2088lm / 30W: 2490lm		23W: 2300lm / 32W: 2857lm / 40W: 3460lm	
🔌	220-240VAC 50/60Hz					
🌞	Citizen /Bridgelux COB					
🌈	2700K / 3000K / 4000K / 5000K					
Ra	≥80 / ≥90					
📐	12° / 24° / 38° / 60°			15° / 24° / 38°		
🔌	Remote electronic power supply					
🔌	PHASE /1-10V / DALI as options					
📐						
	IP 20/44	IP20	IP 20/44	IP20	IP 20/44	IP20



	LX-DL-W11014-LED	LX-DL-W11015-LED	LX-DL-W11364-LED	LX-DL-W11365-LED	LX-DL-W11614-LED	LX-DL-W11615-LED
⚡	8W / 12W / 15W		15W/23W/30W		23W/32W/40W	
💡	8W: 780lm / 12W: 1050lm / 15W: 1150lm		15W: 1300lm / 23W: 2088lm / 30W: 2490lm		23W: 2300lm / 32W: 2857lm / 40W: 3460lm	
🔌	220-240VAC 50/60Hz					
🌞	Citizen / Bridgelux COB					
🌈	2700K / 3000K / 4000K / 5000K					
Ra	≥ 80 / ≥ 90					
📐	12°/24°/38°/60°			15°/24°/38°		
🔌	Remote electronic power supply					
🕒	PHASE / 1-10V / DALI as options					
📐						
🛡️	IP 20/44	IP20	IP 20/44	IP20	IP 20/44	IP20
📐	90x90		90x90	125x125	125x125	150x150



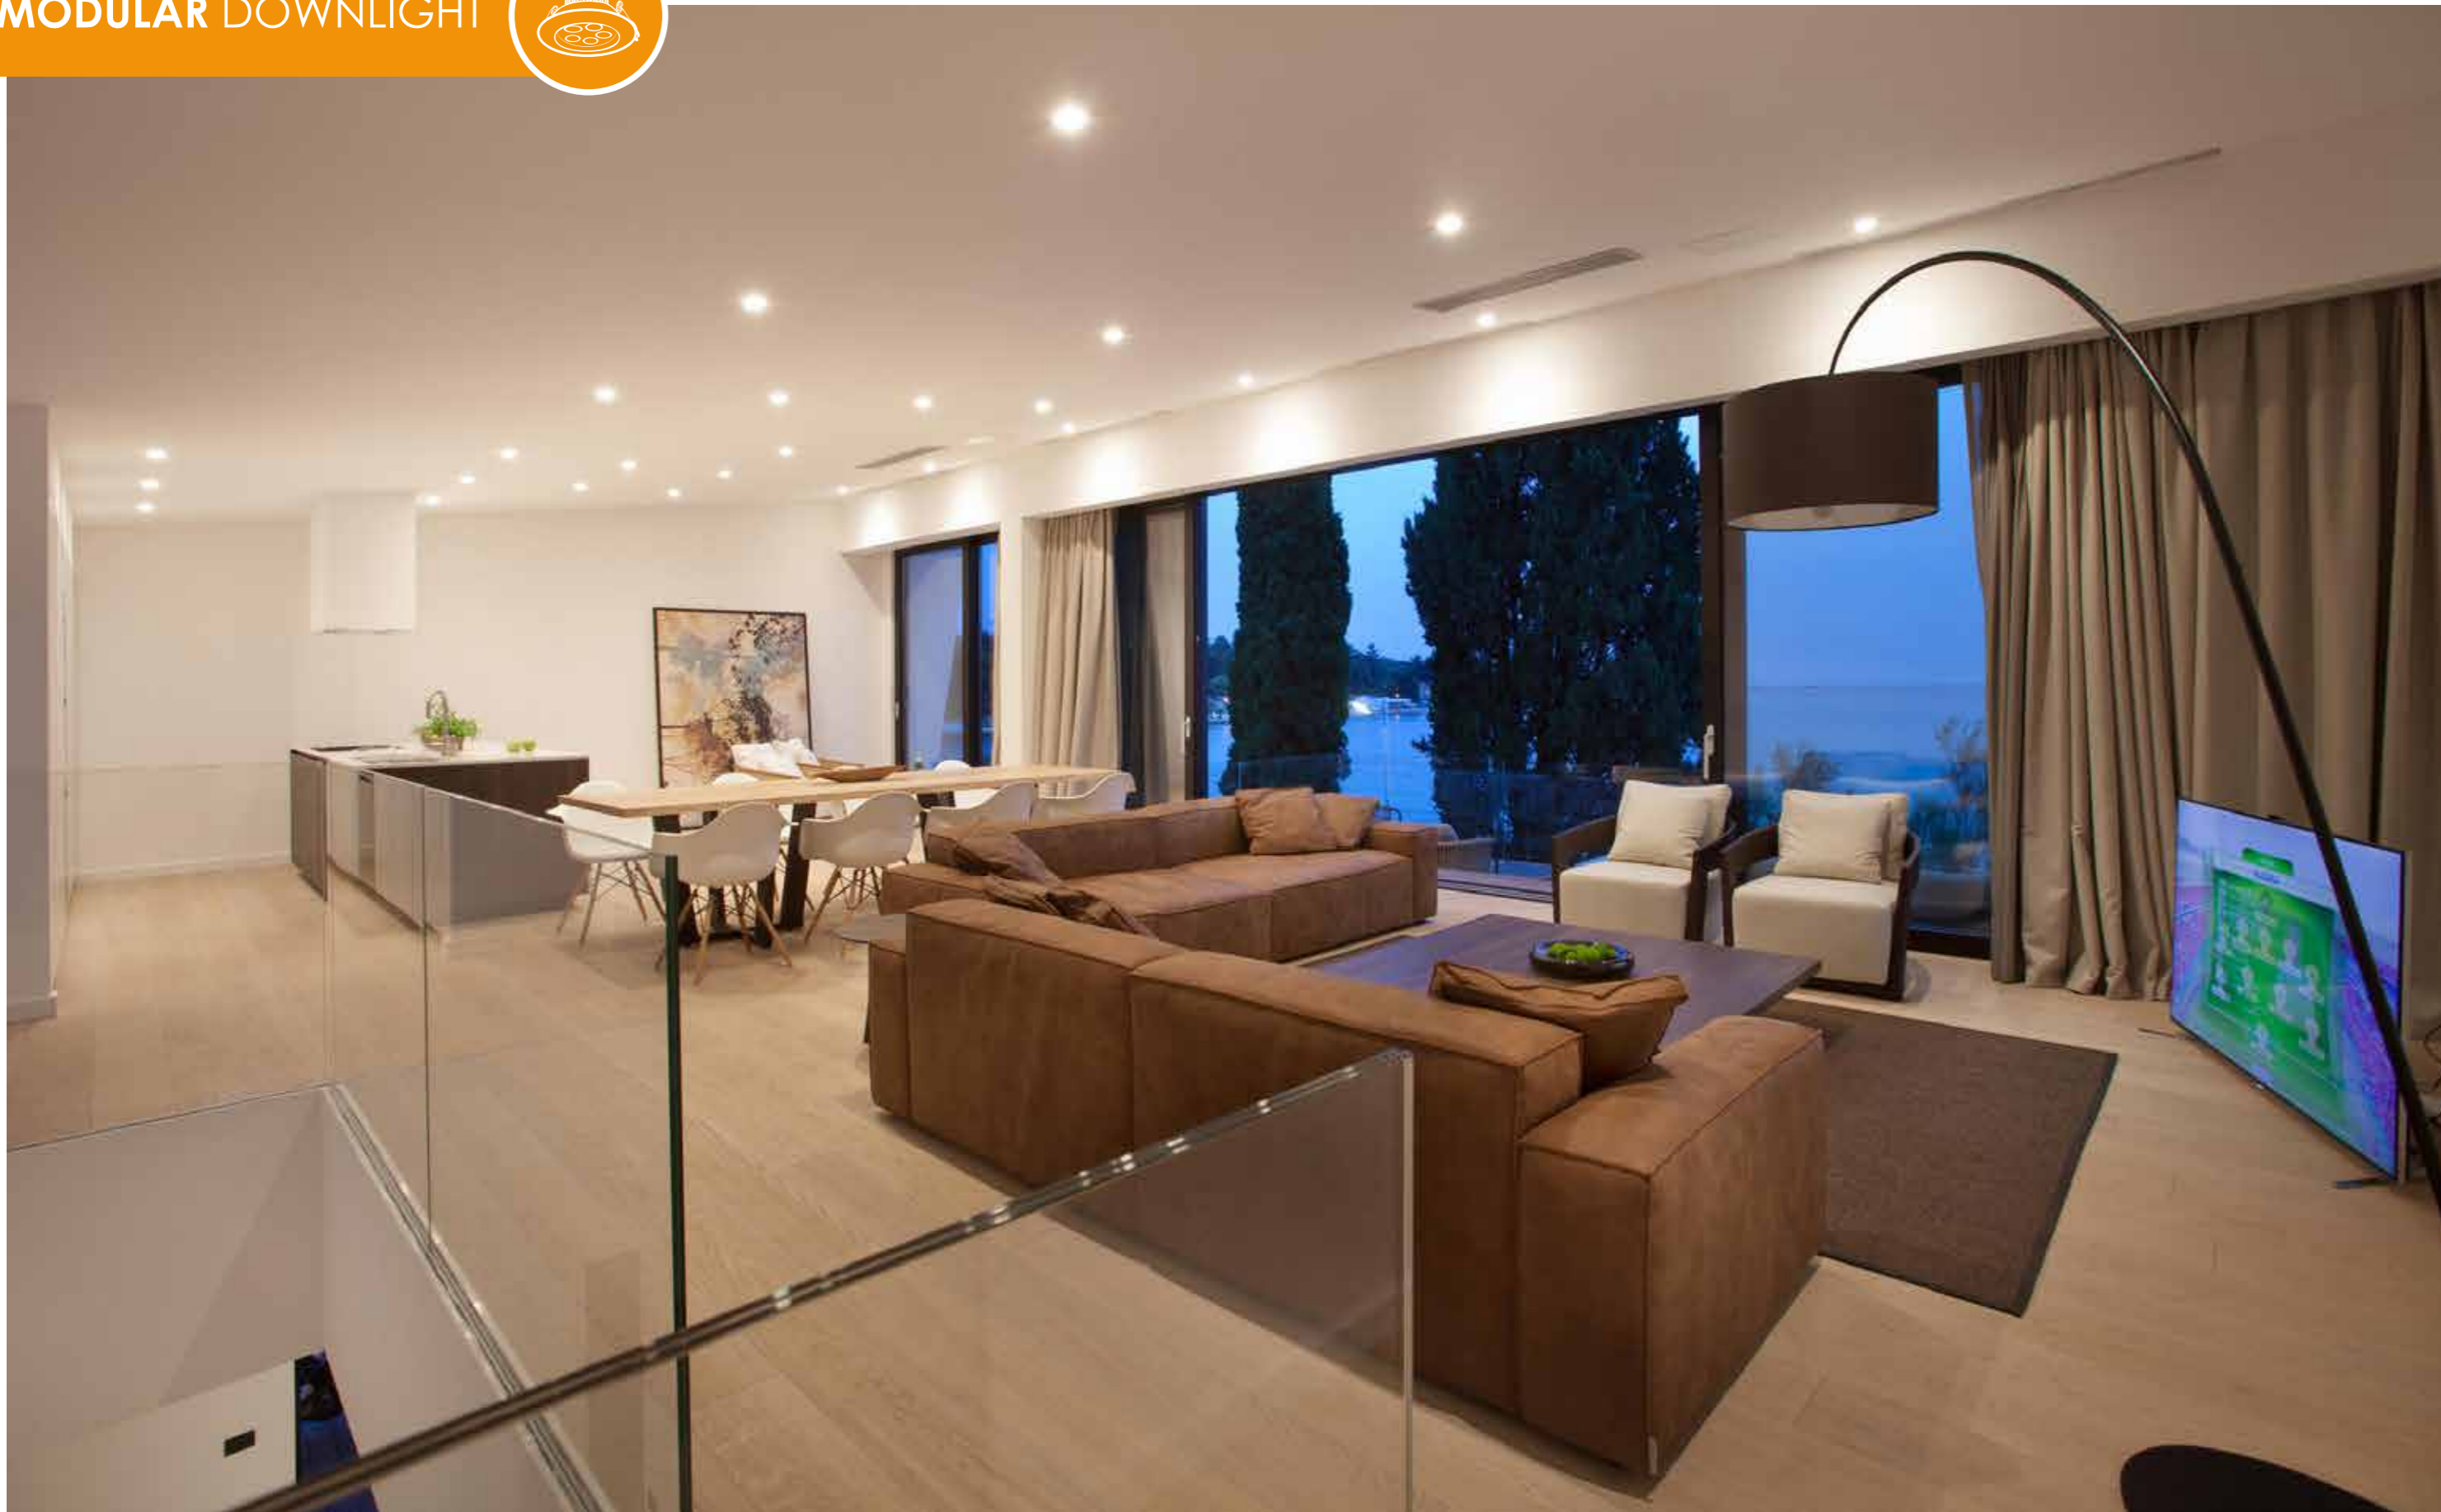


New generation, with modular structure for quick and easy accessory configuration.



IP20

FRONT RING IN DIFFERENT COLOR



	LX-DL-03MZ-LED	LX-DL-04MZ-LED	LX-DL-05MZ-LED
⚡	8W	12W	20W
💡	600 lm	840 lm	1400 lm
⚡	220-240VAC 50/60Hz		
🌈	Cree COB		
🌈	2700K / 3000K / 4000K		
Ra	≥90		
📐	15° / 24° / 36°	15° / 26° / 38°	
🔌	Remote electronic power supply		
📶	PHASE/1-10V /DALI as options		

	Code:	Size:	Combination:	Overall Size:	Cutout:	Structure:
	LX-DL-03MZR01-LED	Φ76x21mm		Φ76x73mm	Φ65mm	Non Adjustable
	LX-DL-04MZR01-LED	Φ85x22mm				
	LX-DL-05MZR01-LED	Φ115x28mm				
	LX-DL-03MZR02-LED	Φ85x30mm		Φ85x73mm	Φ75mm	Adjustable ±25°
	LX-DL-04MZR02-LED	Φ100x25mm				
	LX-DL-05MZR02-LED	Φ125x28mm				
	LX-DL-03MZR03-LED	Φ85x36mm		Φ85x83mm	Φ75mm	Adjustable ±25°
	LX-DL-04MZR03-LED	Φ100x32mm				
	LX-DL-05MZR03-LED	Φ125x34mm				
	LX-DL-03MZR04-LED	85x85x30mm		85x85x73mm	Φ75mm	Adjustable ±25°
	LX-DL-04MZR04-LED	100x100x25mm				
	LX-DL-05MZR04-LED	125x125x28mm				
	LX-DL-03MZR05-LED	Φ90x52mm		Φ90x101mm	Φ80mm	Adjustable ±25°
	LX-DL-04MZR05-LED	Φ110x55mm				
	LX-DL-05MZR05-LED	Φ130x52mm				





REFLECTOR'S COLOR





	LX-DL-0835F-LED	LX-DL-0945A-LED	LX-DL-1050F-LED	LX-DL-1155F-LED	LX-DL-1260A-LED	LX-DL-1375A-LED
	3W		5W	7W		9W
	105 lm	120 lm	270 lm	355 lm	410 lm	560 lm
	220-240VAC 50/60Hz					
	Cree					
	2700K / 3000K / 4000K					
Ra	≥90					
	10° / 15° / 24° / 36°			15° / 24° / 36°		
	Remote electronic power supply					
	PHASE/1-10V / DALI as options					
						
	53	52	68	73	84	90
	Φ42	Φ52	Φ56	Φ62	Φ70	Φ80
	Φ35	Φ45	Φ50	Φ55	Φ60	Φ75
IP20						



	LX-DL-0180F-LED	LX-DL-0180A-LED	LX-DL-0280FS-LED	LX-DL-0380A-LED	LX-DL-0480F-LED
⚡	9W				
💡	400 lm	430 lm	280 lm	330 lm	250 lm
🔌	220-240VAC 50/60Hz				
🌞	Cree COB				
🌈	2700K / 3000K / 4000K				
Ra	≥90				
📐	15° / 24° / 36°				
🔧	Remote electronic power supply				
📶	PHASE/1-10V /DALI as options				
📏					
IP20					



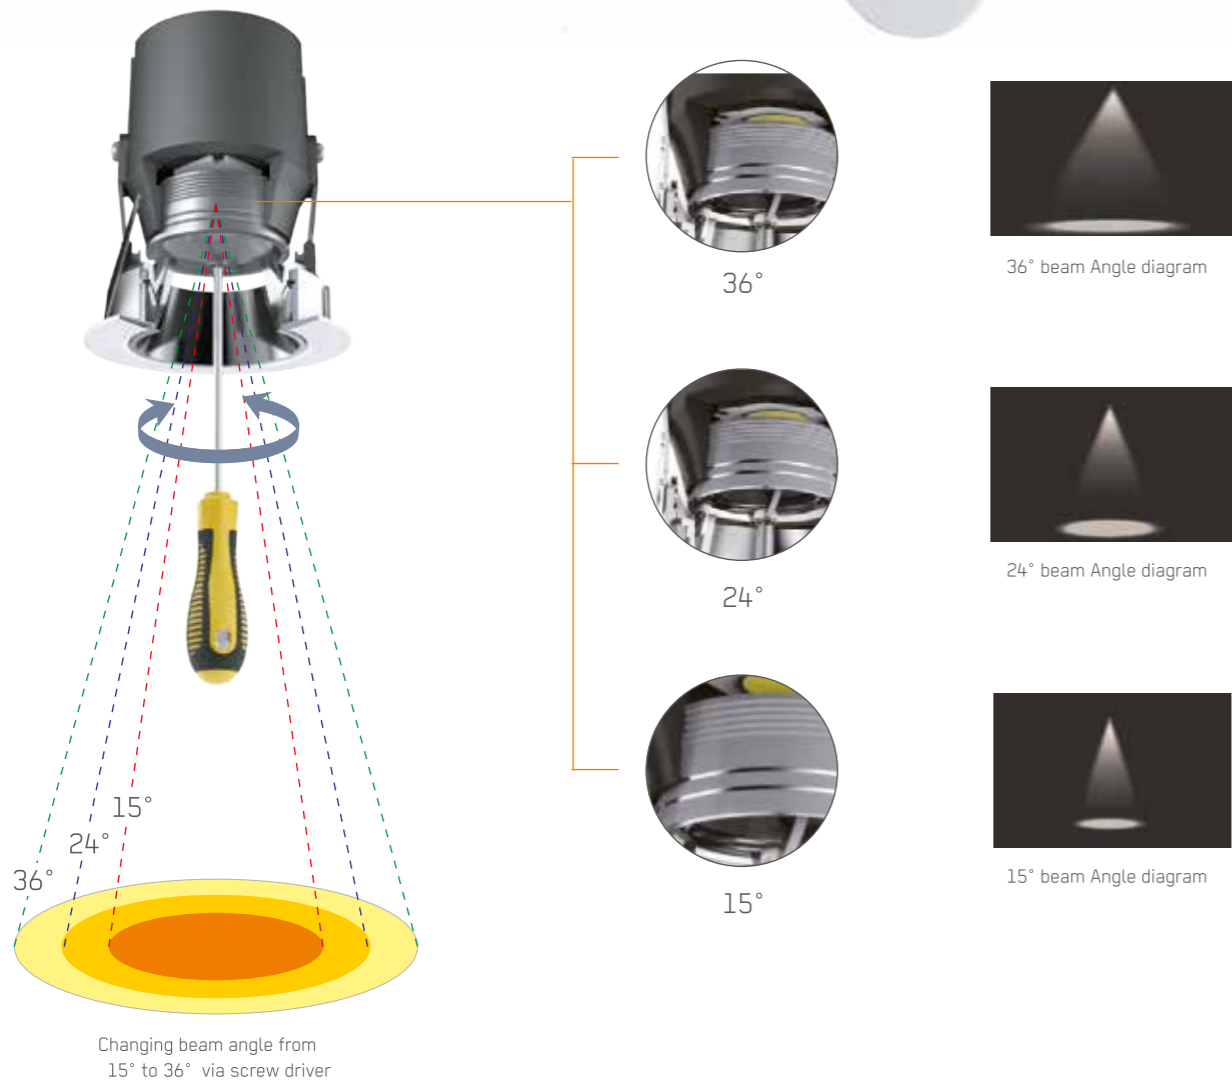

OPTION:



REFLECTOR'S COLOR

	LX-DL-02055F-LED	LX-DL-02055A-LED	LX-DL-03065F-LED	LX-DL-03065A-LED	LX-DL-04075F-LED	LX-DL-04075A-LED
⚡	5W / 7W				9W	
💡	255 lm / 330 lm				405 lm	
🏠	220-240VAC 50/60Hz					
🌈	Cree					
🌈	2700K / 3000K / 4000K					
Ra	≥90					
📏	15° / 24° / 36° / Random beam angle:15°-36°					
🔌	Remote electronic power supply					
📶	PHASE/1-10V /DALI as options					
📏						
IP20						

HOTEL SERIES DOWNLIGHT



RING'S COLOR











	LX-DL-7175A-LED	LX-DL-7295A-LED	LX-DL-73115A-LED
⚡	8W	12W	20W
💡	650 lm	1060 lm	1500 lm
⚡	220-240VAC 50/60Hz		
💡	Cree COB		
🌈	2700K / 3000K / 4000K		
Ra	≥90		
📐	15° / 24° / 36°	15° / 26° / 38°	
🔌	Remote electronic power supply		
📷	PHASE/1-10V /DALI as options		
📏			
IP20			



	LX-DL-1565A-LED	LX-DL-1675A-LED	LX-DL-24100A-LED
⚡	7W	9W	15W
💡	450 lm	580 lm	1000 lm
⚡	220-240VAC 50/60Hz		
💡	Cree COB		
🌈	2700K / 3000K / 4000K		
Ra	≥80		≥90
📐	15° / 24° / 36°	8° / 15° / 24° / 36°	15° / 24° / 36°
🔌	Remote electronic power supply		
📷	PHASE/1-10V /DALI as options		
📏			
IP20			



HOUSING IN DIFFERENT COLOR


	LX-DL-5635F-LED	LX-DL-5740F-LED	LX-DL-5850F-LED	LX-DL-5960F-LED
⚡	2W	3W	5W	7W
💡	100 lm	120 lm	270 lm	355 lm
U _o	220-240VAC 50/60Hz			
☀️	Cree			
🌈	2700K / 3000K / 4000K			
Ra	≥80			
📐	10° / 15° / 24° / 36°		15° / 24° / 36°	
🔌	Remote electronic power supply			
🔄	PHASE/1-10V / DALI as options			
📏				
				
IP20				



HOUSING IN DIFFERENT COLOR


	LX-DL-6040A-LED	LX-DL-6150A-LED	LX-DL-6260A-LED
⚡	3W	5W	7W
💡	100 lm	270 lm	355 lm
U _o	220-240VAC 50/60Hz		
☀️	Cree		
🌈	2700K / 3000K / 4000K		
Ra	≥80		
📐	10° / 15° / 24° / 36°		15° / 24° / 36°
🔌	Remote electronic power supply		
🔄	PHASE/1-10V / DALI as options		
📏			
			
IP20			



HOUSING IN DIFFERENT COLOR



	LX-DL-W5640FT-LED	LX-DL-W5750FT-LED	LX-DL-W5860FT-LED	LX-DL-W5970FT-LED
⚡	2W	3W	5W	7W
💡	100 lm	120 lm	270 lm	355 lm
🔌	220-240VAC 50/60Hz			
🌞	Cree			
🌈	2700K / 3000K / 4000K			
Ra	≥80			
📐	10° / 15° / 24° / 36°		15° / 24° / 36°	
🔌	Remote electronic power supply			
📷	PHASE/1-10V /DALI as options			
📏				
IP20				



HOUSING IN DIFFERENT COLOR



	LX-DL-W6050AT-LED	LX-DL-W6160AT-LED	LX-DL-W6270AT-LED
⚡	3W	5W	7W
💡	100 lm	270 lm	355 lm
🔌	220-240VAC 50/60Hz		
🌞	Cree		
🌈	2700K / 3000K / 4000K		
Ra	≥80		
📐	10° / 15° / 24° / 36°		15° / 24° / 36°
🔌	Remote electronic power supply		
📷	PHASE/1-10V /DALI as options		
📏			
IP20			





White Grey Wine Black

Self-contained LED engine in four colours with industrial design



- Striped Glass
- Clear Glass
- Frosted Softness
- Honey Comb
- Fixed Ring
- Sleeve

Filter


Optional accessories give the design flexibility in combination of different luminaires.
Anti-glare sleeve achieves cut-off angle >40°, UGR <6.
The lighting tool for perfectly glare-free light from ceiling.



REFLECTOR'S COLOR



	LX-DL-01075F-LED	LX-DL-W01075FT-LED	LX-DL-01075FS-LED	LX-DL-W01075FST-LED
⚡	9W			
💡	540 Lm			
🔌	220-240VAC 50/60Hz			
🌞	Cree COB			
🌈	2700K / 3000K / 3500K / 4000K			
Ra	≥90			
📐	15° / 24° / 36° / 60°			
🔌	Remote electronic power supply			
📷	PHASE/1-10V / DALI as options			
↔				
IP20				
IP65				

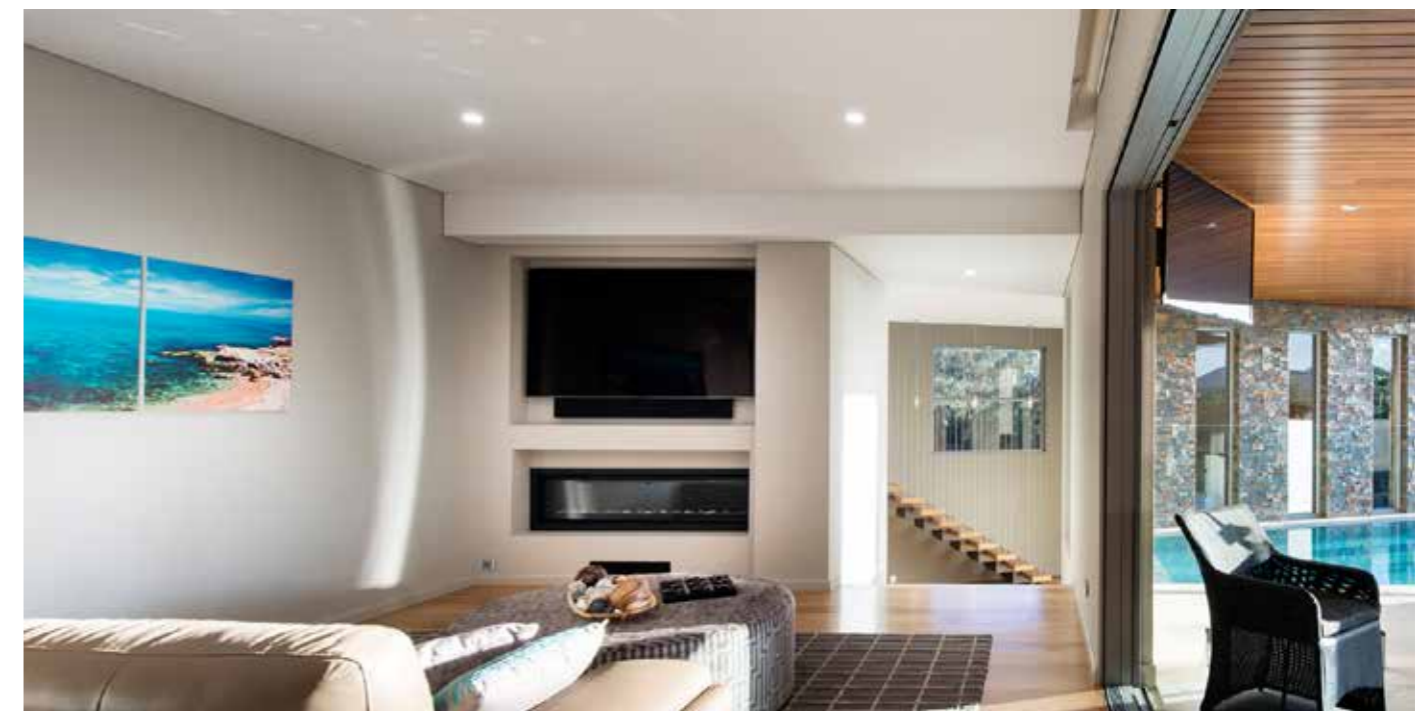



REFLECTOR'S COLOR

	LX-DL-01075A-LED	LX-DL-W01075AT-LED	LX-DL-01075AS-LED	LX-DL-W01075AST-LED
⚡	9W			
💡	540 Lm			
U _o	220-240VAC 50/60Hz			
☀️	Cree COB			
🌈	2700K / 3000K / 3500K / 4000K			
Ra	≥90			
📏	15° / 24° / 36° / 60°			
🔌	Remote electronic power supply			
📶	PHASE/1-10V /DALI as options			
📏				
IP20				
IP65				


One design for fixed or adjustable performance



Standard adjustable reflector with 30° tilt and 355° rotation



Optional fixed reflector avoids visible ceiling aperture

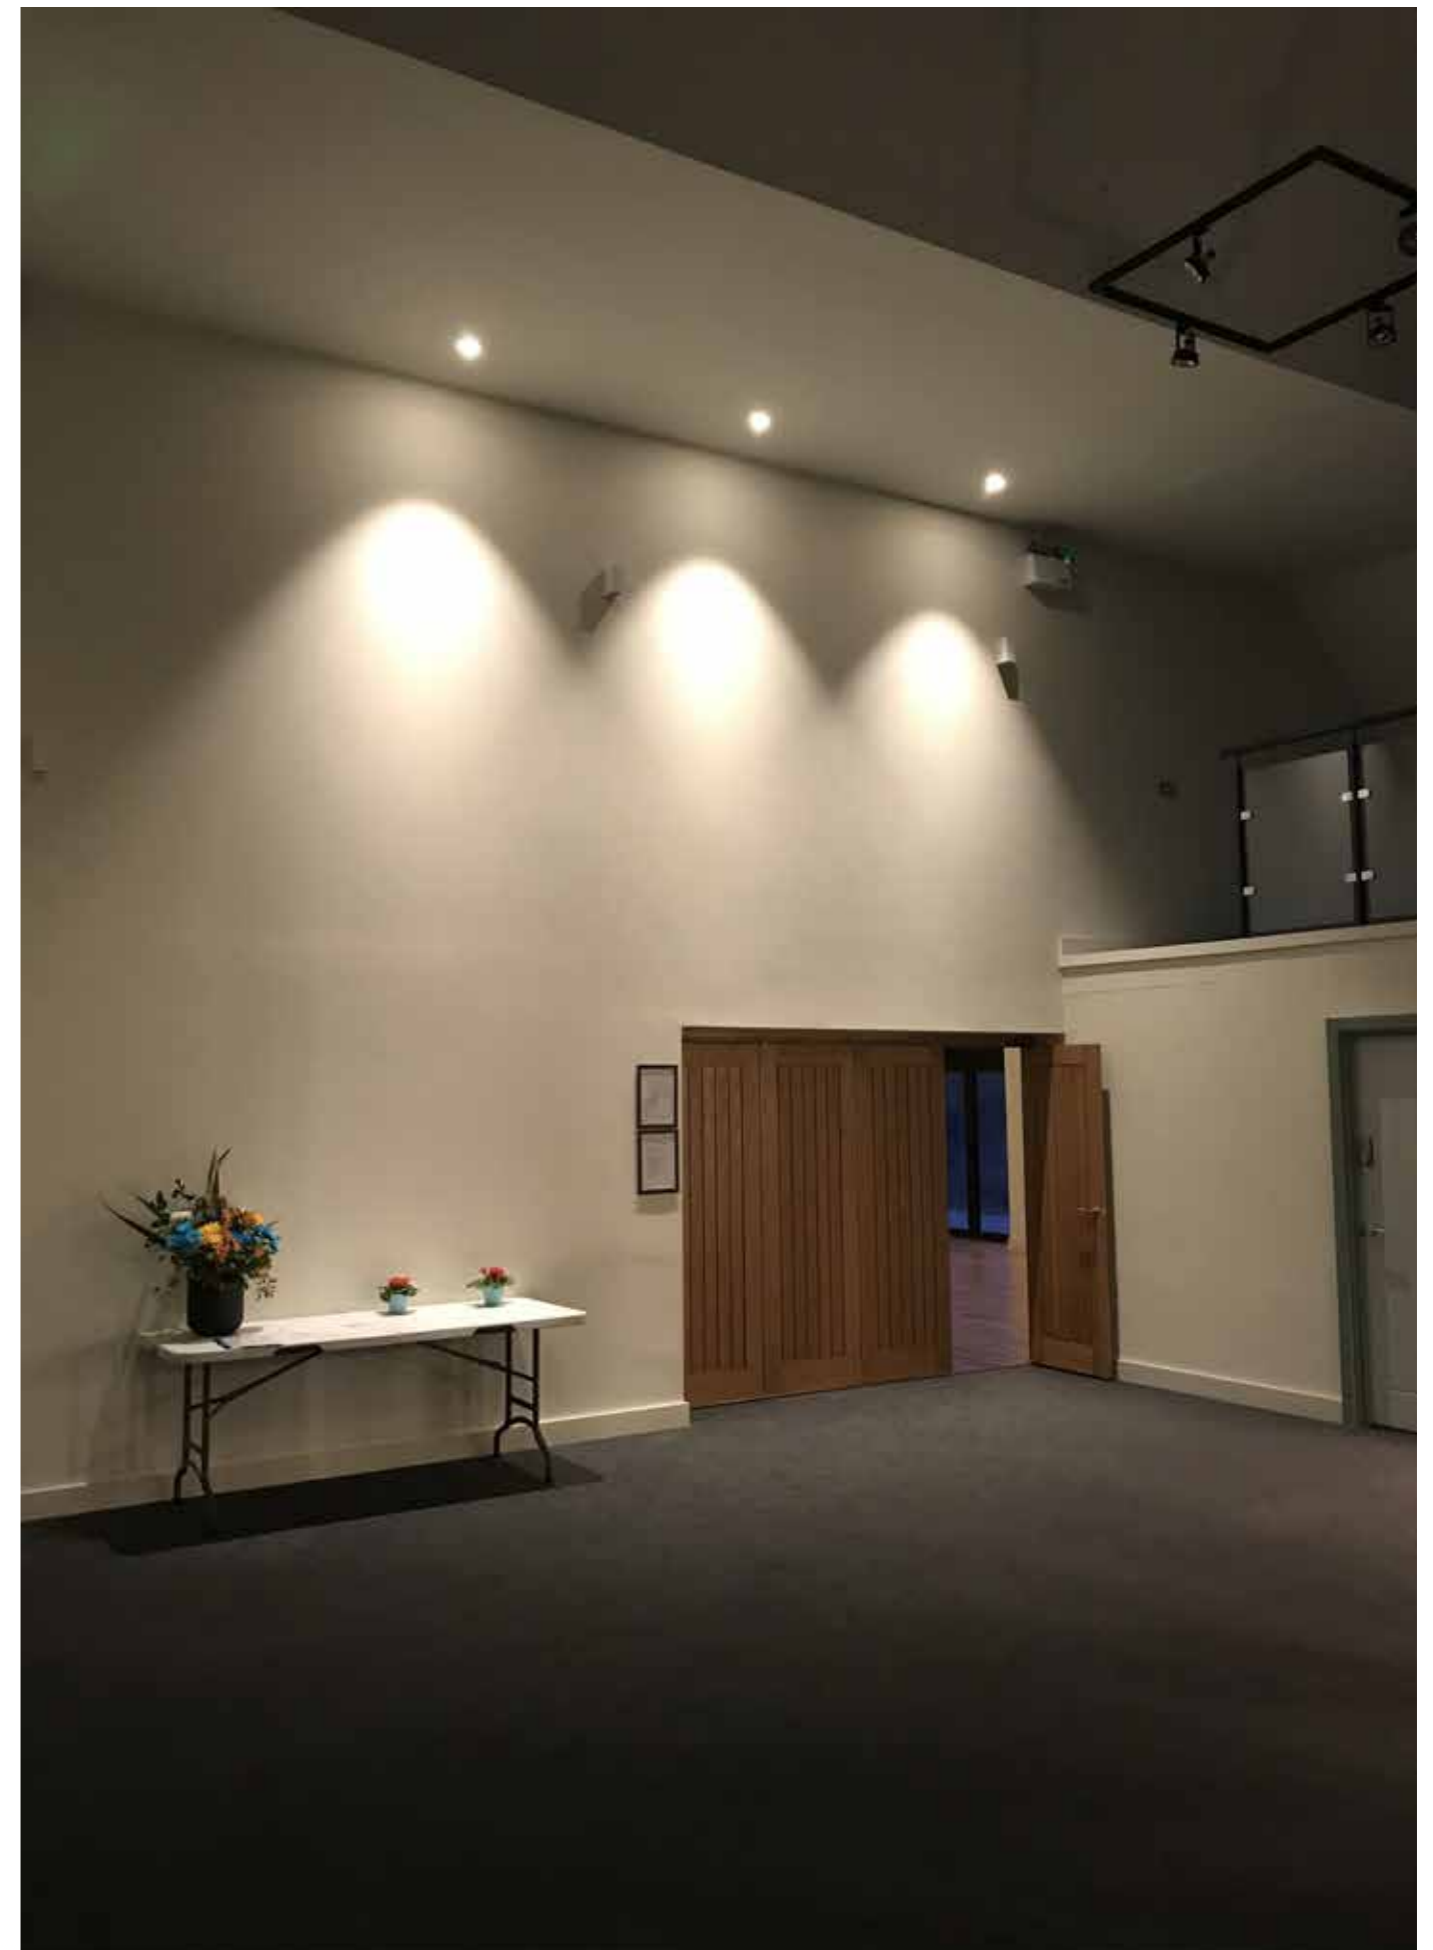



IP65

REFLECTOR'S COLOR




	LX-DL-05105F-LED	LX-DL-05105A-LED	LX-DL-06150F-LED	LX-DL-06150A-LED
⚡	20W		35W	
💡	1200 lm		2100 lm	
⚡	220-240VAC 50/60Hz			
🔦	Cree COB			
🌈	2700K / 3000K / 3500K / 4000K			
Ra	≥90			
📐	15° / 24° / 36° / 60°			
🔌	Remote electronic power supply			
📺	PHASE/1-10V / DALI as options			
📏				
IP20				

Advanced ceiling installation




Standard trim

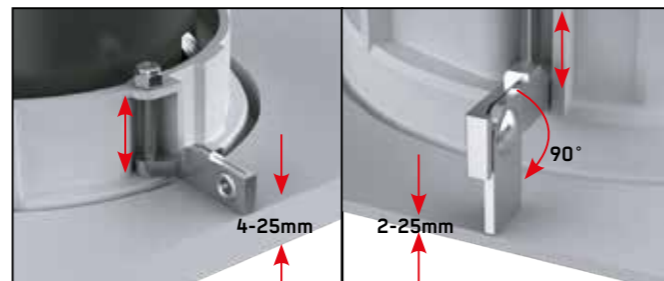

ceiling thickness
4mm to 25mm

ceiling thickness
2mm to 25mm

Trimless Installation

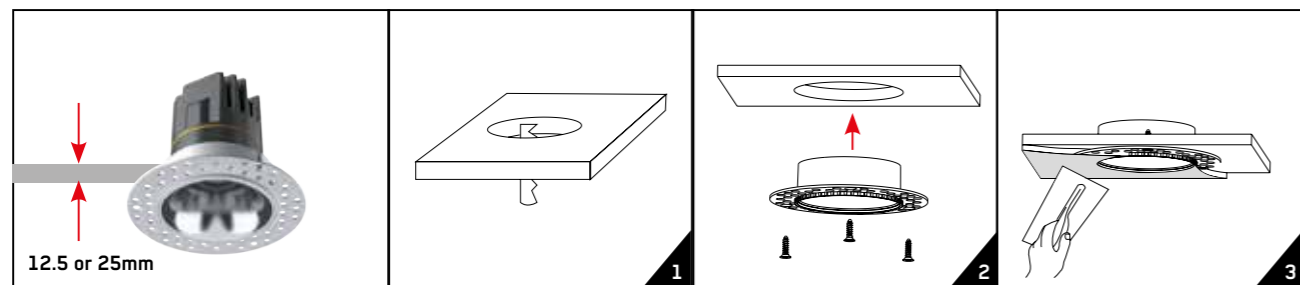

12.5 or 25mm


High quality LED: CREE COB CRI→90

Perfect Optical control: 12°/24°/36°/60°

IP20/IP65 protection for LED

Optional accessories: honeycomb/glass/sleeve

UGR<9, cutoff angle>35° offers excellent visual comfort

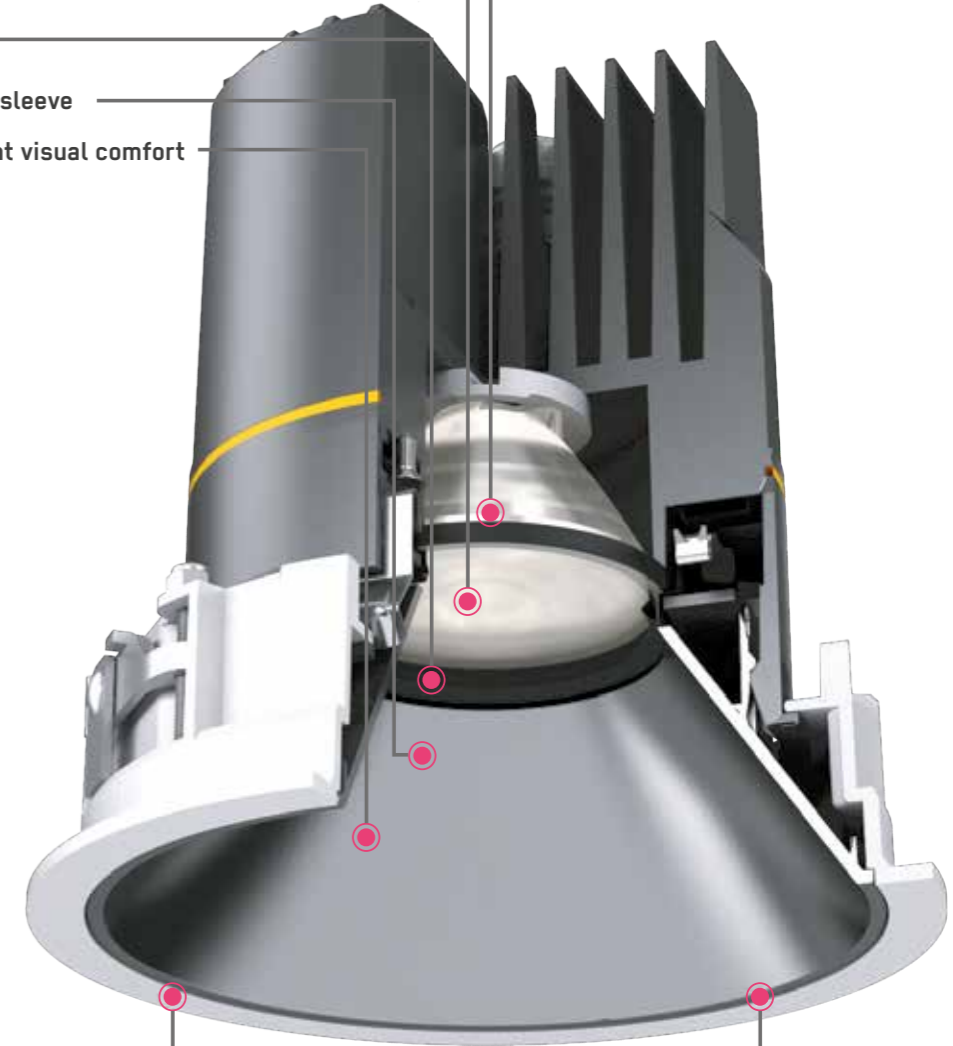

Ultra-narrow trim design leaves
no flange between the secondary
reflector and trim

Normal IP rating: IP20
Maximum IP rating: IP65



IP65



FRAME OPTIONS



	LX-DL-7475F-LED	LX-DL-75105F-LED	LX-DL-76125F-LED	LX-DL-77160F-LED
⚡	9W	15W	25W	35W
💡	560 lm	950 lm	1665 lm	2275 lm
🔌	220-240VAC 50/60Hz			
🔍	SMD 2835			
🌈	2700K / 3000K / 4000K / 5000K			
Ra	≥80			
📏	90°			
🔌	Remote electronic power supply			
📷	PHASE/1-10V /DALI as options			
📏				



IP65




RING OF COLOR



	LX-DL-5360F-LED	LX-DL-5480F-LED	LX-DL-55120F-LED	LX-DL-56160F-LED
⚡	3W	6W	12W	18W
💡	120 lm	385 lm	900 lm	1280 lm
⚡	220-240VAC 50/60Hz			
💡	SMD 2835			
🌈	2700K / 3000K / 4000K / 6000K			
Ra	≥80			
📐	120°			
🔌	Remote electronic power supply			
📷	PHASE/1-10V /DALI as options			
📐				
IP44				



RING OF COLOR



	LX-DL-5255A-LED	LX-DL-5375A-LED	LX-DL-5495A-LED	LX-DL-55125A-LED
⚡	3W	6W	8W	12W
💡	225 lm	430 lm	460 lm	1000 lm
⚡	220-240VAC 50/60Hz			
💡	CREE COB			
🌈	2700K / 3000K / 4000K			
Ra	≥90			
📐	10° / 20°	10° / 20° / 36°		
🔌	Remote electronic power supply			
📷	PHASE/1-10V /DALI as options			
📐				
IP20				



16~22mm




	LX-DL-0921-LED-5W	LX-DL-W0922-LED-5W	LX-DL-W0626-A-LED-8W	LX-DL-W0736-LED	LX-DL-W0626-B-LED-8W	LX-DL-W0725-LED-8W
	5W	5W	8W	8W/10W	8W	8W
	220-240VAC 50/60Hz					
	340Lm	340Lm	470Lm	8W:629Lm/10W:691Lm	470Lm	545Lm
	3000K/4000K					
	>90					
	15°/22°/30°		10°/15°/22°/30°		15°/22°/30°	



	LX-DL-1021-LED-5W	LX-DL-0621-LED-8W	LX-DL-0631-LED	LX-DL-0641-LED-21W	LX-DL-0651-LED-28W
	5W	8W	8W/10W	21W	28W
	AC220-240V				
	340Lm	545Lm	8W:629Lm/10W:440-770Lm	1 730Lm	2 120Lm
	3000K/4000K				
	>90				
	15°/22°/30°		6°/10°/15°/22°/30°		15°/24°/36°

	LX-DL-W0627-LED-8W	LX-DL-W0628-LED-8W	LX-DL-W0724-LED-8W	LX-DL-W0637-LED	LX-DL-W0638-LED	LX-DL-W0737-LED
	8W			8W/10W		
	AC220-240V					
	545Lm	470Lm	545Lm	8W:629Lm/10W:770Lm	8W:629Lm/10W:691Lm	8W:629Lm/10W:691Lm
	3000K/4000K					
	>90					
	15°/22°/30°			10°/15°/22°/30°		

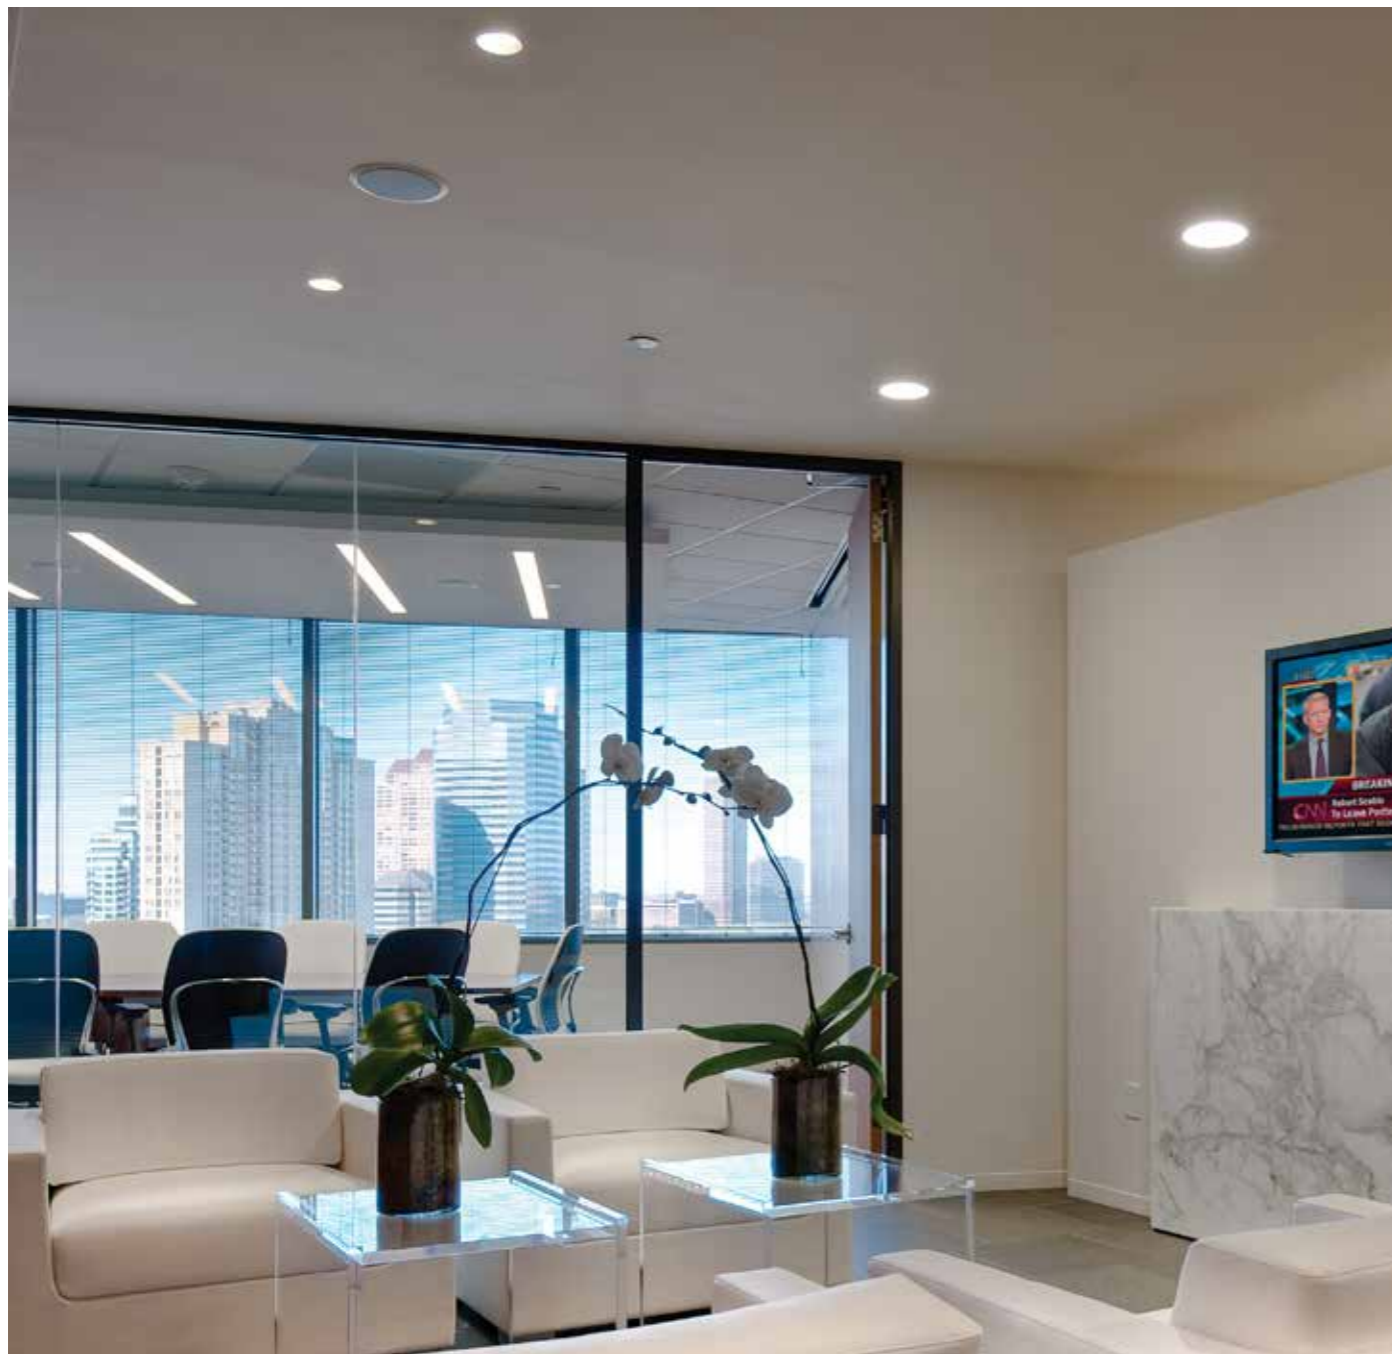

	LX-DL-0623-LED-8W	LX-DL-0633-LED	LX-DL-1022-LED-5W	LX-DL-0733-LED
⚡	8W	8W/10W	5W	8W/10W
U _i	220-240VAC 50/60Hz			
☀️	545Lm	8W:629Lm/10W:770Lm	340Lm	8W:629Lm/10W:691Lm
🌈	3000K/4000K			
Ra	>90			
📐	15°/22°/30°	10°/15°/22°/30°	15°/22°/30°	10°/15°/22°/30°
📏				





	LX-DL-0624-LED-8W	LX-DL-0634-LED	LX-DL-0722-LED-8W
⚡	8W	8W/10W	8W
U _i	220-240VAC 50/60Hz		
☀️	470Lm	8W:629Lm/10W:691Lm	545Lm
🌈	3000K/4000K		
Ra	>90		
📐	15°/22°/30°	10°/15°/22°/30°	15°/22°/30°
📏			



Optional adapter
 Honeycomb
 Spread Lens

	LX-DL-W0625-LED-8W	LX-DL-W0635-LED	LX-DL-W0636-LED	LX-DL-W0734-LED	LX-DL-W0642-LED-21W	LX-DL-W0652-LED-28W
⚡	8W	8W/10W	8W/10W	8W/10W	21W	28W
U _i	220-240VAC 50/60Hz					
☀️	545Lm	8W:629Lm/10W:770Lm	8W:629Lm/10W:691Lm	8W:629Lm/10W:691Lm	1 730Lm	2 120Lm
🌈	3000K/4000K					
Ra	>90					
📐	15°/22°/30°	10°/15°/22°/30°	10°/15°/22°/30°	10°/15°/22°/30°	15°/24°/36°	15°/24°/36°
📏						



Optional adapter
 Honeycomb
 Spread Lens



	LX-DL-W0629-LED-8W	LX-DL-W0639-LED	LX-DL-W0643-LED-21W	LX-DL-W0653-LED-28W
⚡	8W	8W/10W	21W	28W
U _{ac}	220-240VAC 50/60Hz			
☀	545Lm	8W:629Lm/10W:770Lm	1 730Lm	2 120Lm
🌈	3000K/4000K			
Ra	>90			
☀	15°/22°/30°	10°/15°/22°/30°	15°/22°/30°	15°/24°/36°
IP20				





	LX-DL-0620-LED-8W	LX-DL-0630-LED	LX-DL-0644-LED-21W	LX-DL-0654-LED-28W
⚡	8W	8W/10W	21W	28W
U _{ac}	220-240VAC 50/60Hz			
☀	545Lm	8W:629Lm/10W:770Lm	1 730Lm	2 120Lm
🌈	3000K/4000K			
Ra	>90			
☀	15°/22°/30°	10°/15°/22°/30°	15°/22°/30°	15°/24°/36°
IP20 IP54				









LX-DL-018-LED
2x7W
1330Lm
220-240VAC 50/60Hz
Citizen
2700K / 3000K / 4000K / 5000K
≥80
25°/38°/60°
Remote electronic power supply
PHASE/1-10V /DALI as options

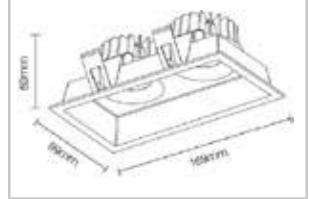


LX-DL-017-LED
7W
659Lm
220-240VAC 50/60Hz
Citizen
2700K / 3000K / 4000K / 5000K
≥80
25°/38°/60°
Remote electronic power supply
PHASE/1-10V /DALI as options

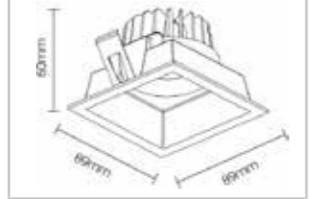


LX-DL-1801-LED
7W
655Lm
37V 200mA
Citizen
2700K / 3000K / 4000K / 5000K
≥80
25°/38°/60°
Remote electronic power supply
PHASE/1-10V /DALI as options

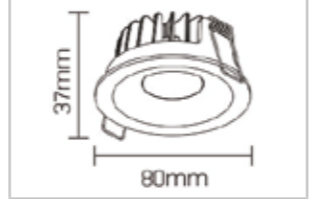


LX-DL-1802-LED
8w / 10w
8W:820lm / 10W:950lm
37V 200mA
Citizen
2700K / 3000K / 4000K / 5000K
≥80 / ≥90
25°/38°/60°
Remote electronic power supply
PHASE/1-10V /DALI as options

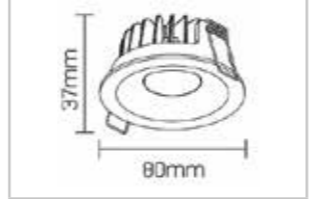


LX-DL-1902-LED
8W / 10W
8W:520lm / 10W: 600lm
37V 200mA
Citizen
2700K / 3000K / 4000K / 5000K
≥80
25°/38°/60°
Remote electronic power supply
PHASE/1-10V /DALI as options

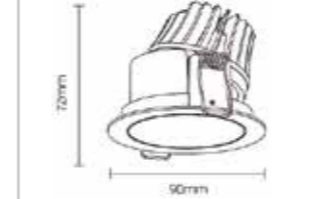


LX-DL-1903-LED
7W
530Lm
37V 200mA
Citizen
2700K / 3000K / 4000K / 5000K
≥80
25°/38°/60°
Remote electronic power supply
PHASE/1-10V /DALI as options

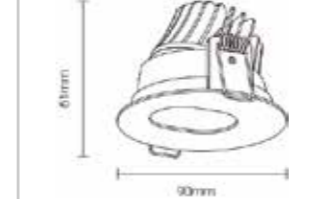



LX-DL-1904-LED
7W
485Lm
37V 200mA
Citizen
2700K / 3000K / 4000K / 5000K
≥80
25°/38°/60°
Remote electronic power supply
PHASE/1-10V /DALI as options

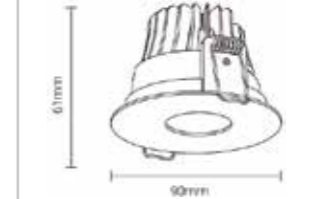


LX-DL-11017-LED
9W
800Lm
37V 250mA
Citizen
2700K / 3000K / 4000K / 5000K
≥80
25°/38°/60°
Remote electronic power supply
PHASE/1-10V /DALI as options

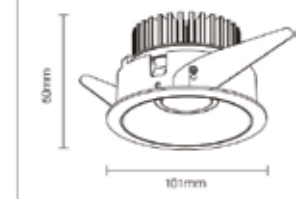


LX-DL-W017-LED
8w / 10w
8W:820lm / 10W:950lm
37V 200mA
Citizen
2700K / 3000K / 4000K / 5000K
≥80 / ≥90
25°/38°/60°
Remote electronic power supply
PHASE/1-10V /DALI as options

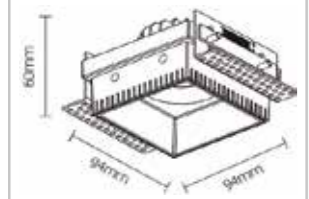


LX-DL-W018-LED
2x8W / 2x10W
2x8W: 1640LM / 2x10W: 1900lm
8W: 37V 200mA / 10W: 37V 300mA
Citizen / Cree / Bridgelux COB
2700K / 3000K / 4000K / 5000K
≥80 / ≥90
25°/38°/60°
Remote electronic power supply
PHASE/1-10V /DALI as options

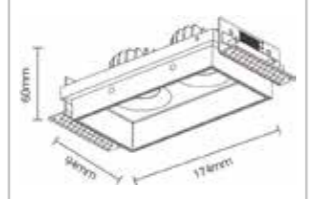

LX-DL-W11016-LED
9W
800Lm
37V 250mA
Citizen
2700K / 3000K / 4000K / 5000K
≥80
25°/38°/60°
Remote electronic power supply
PHASE/1-10V /DALI as options

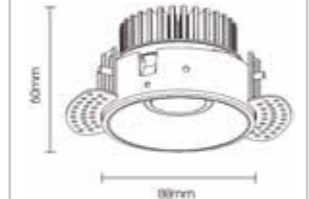


LUNA DOWNLIGHT

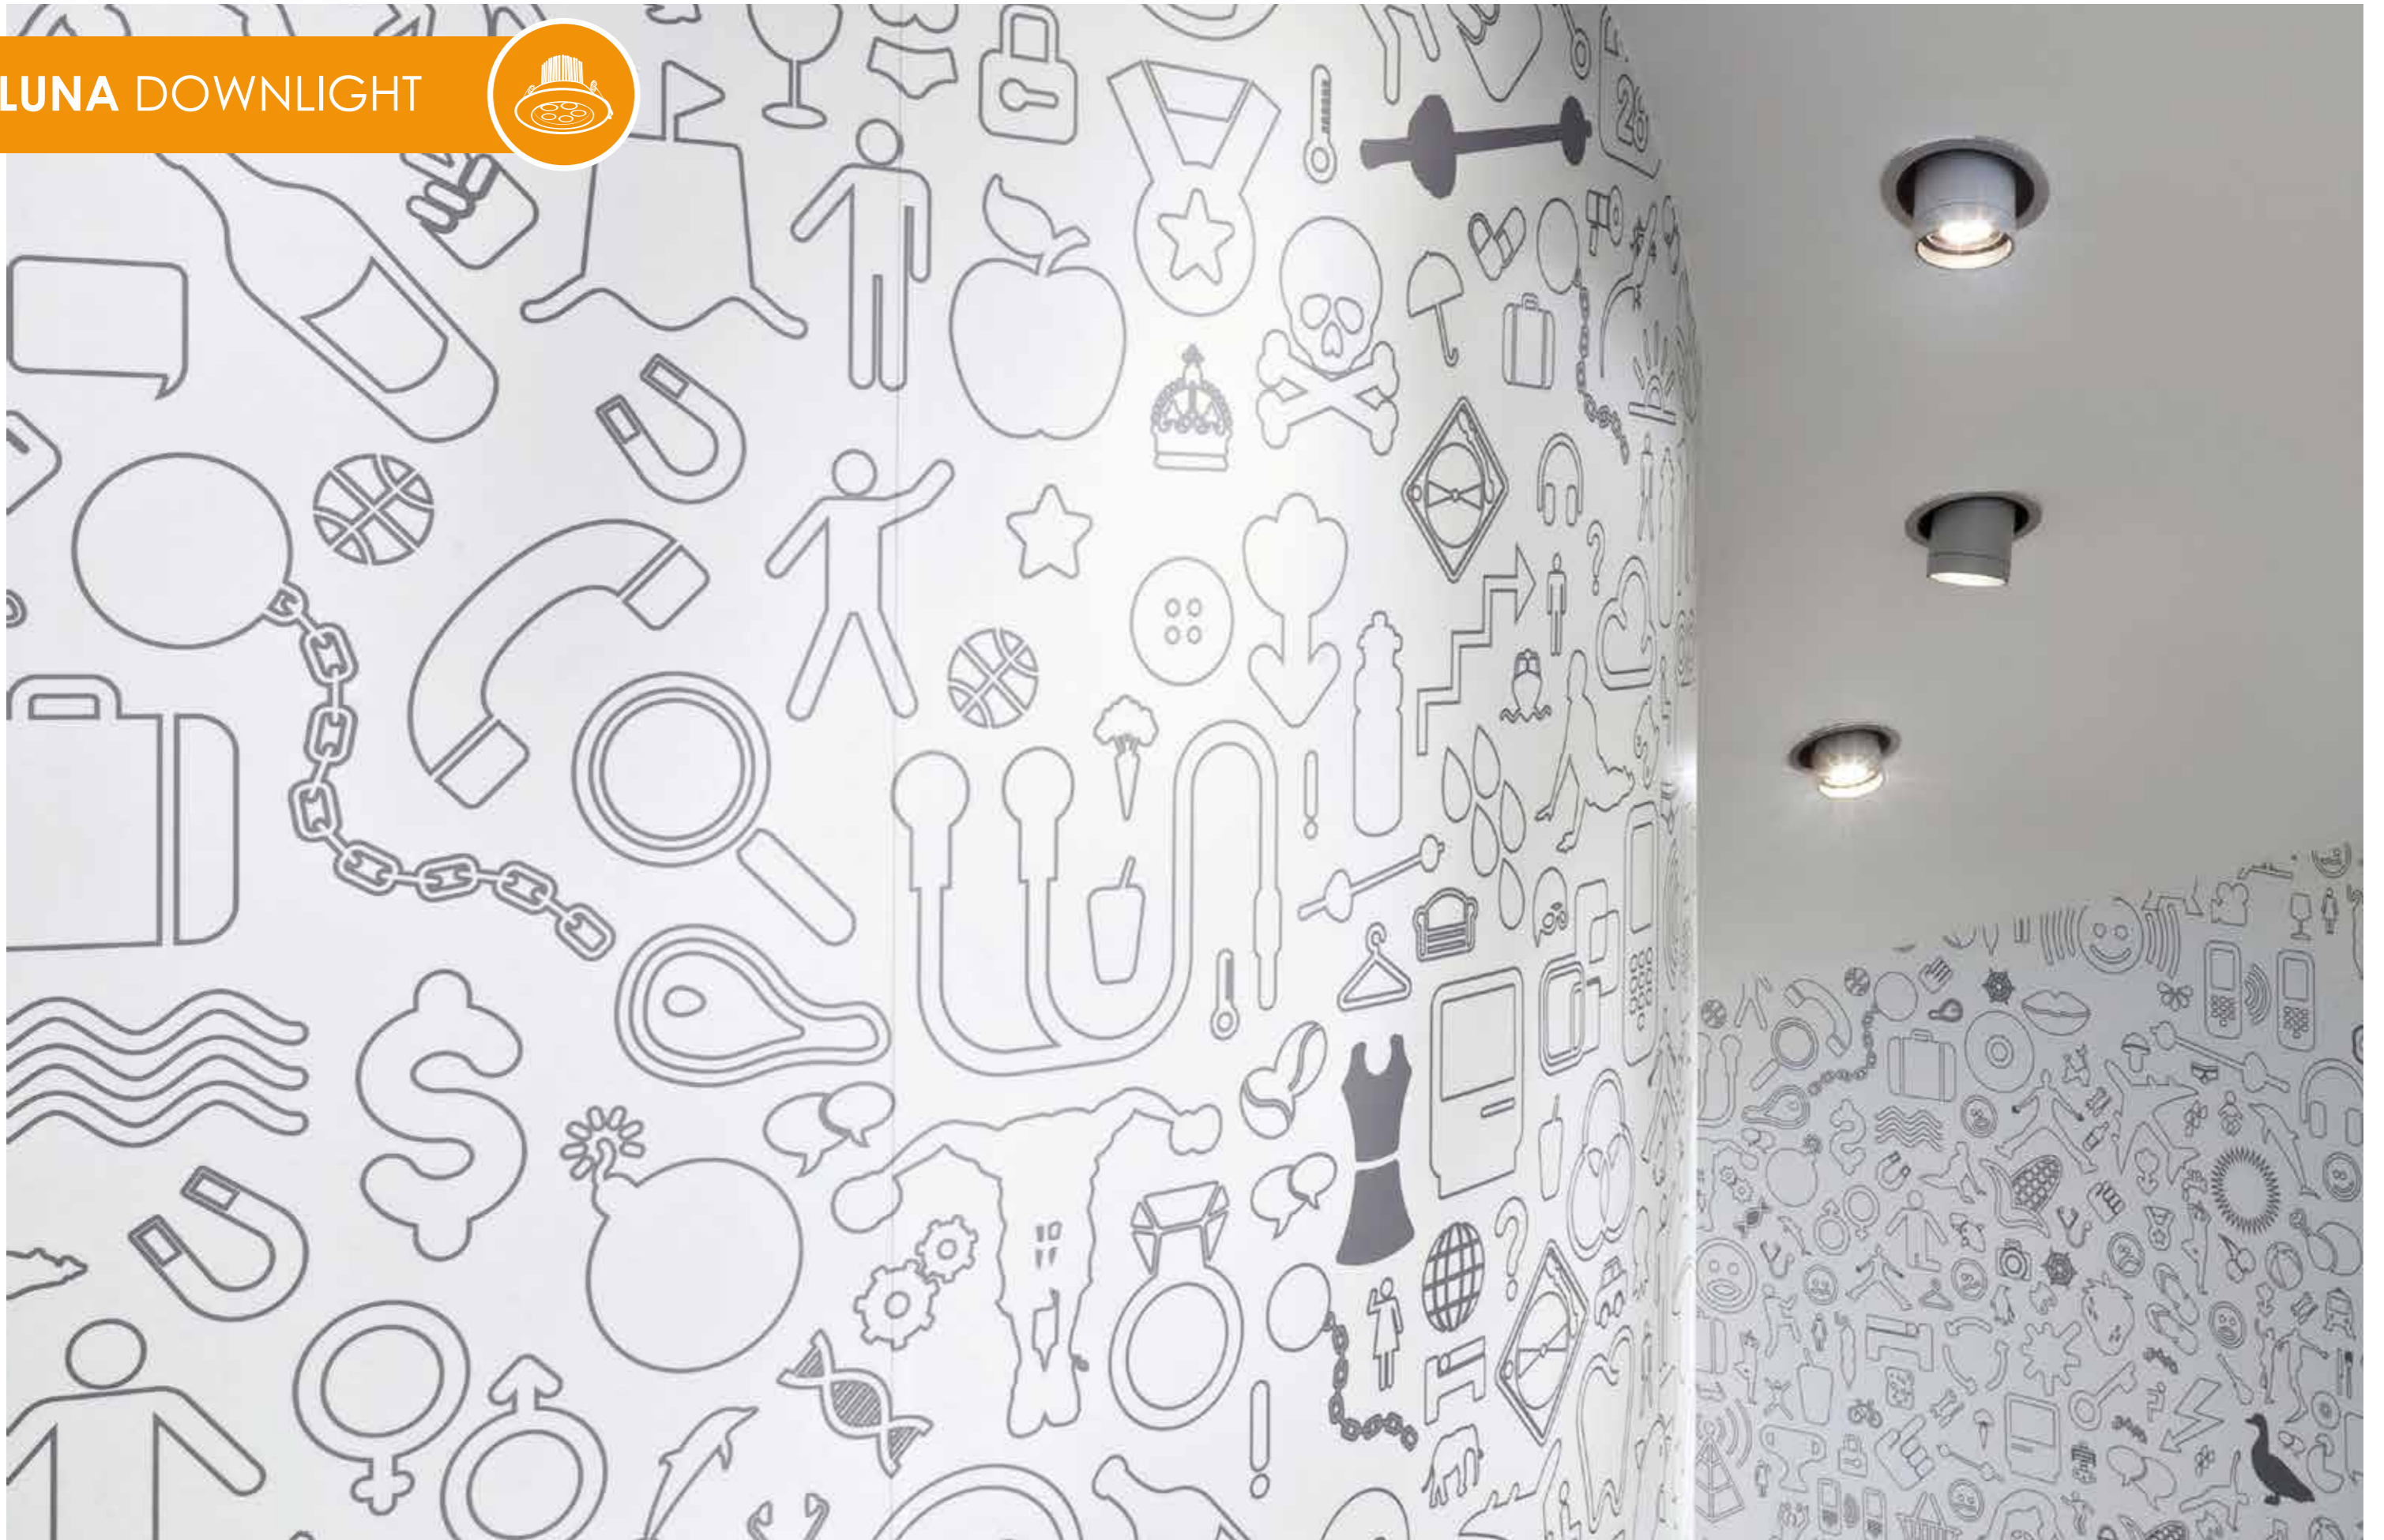




	LX-DL-44065F-LED	LX-DL-45090F-LED	LX-DL-46115F-LED	LX-DL-47160F-LED	LX-DL-48195F-LED
⚡	7W	9W	15W	25W	35W
💡	455 lm	585 lm	975 lm	1625 lm	2275 lm
🔌	220-240VAC 50/60Hz				
🌞	Cree COB				
🌈	2700K / 3000K / 4000K / 6000K				
Ra	≥80				
⚠️	40°				
🔌	Remote electronic power supply				
📷	PHASE/1-10V /DALI as options				
📏					
IP20					



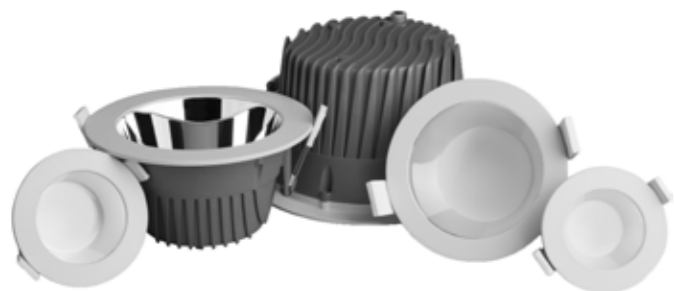


REFLECTORS IN DIFFERENT COLOR



	LX-DL-7875F-LED	LX-DL-7990F-LED	LX-DL-80125F-LED	LX-DL-81150F-LED	LX-DL-82200F-LED
⚡	9W	15W	20W	30W	45W
💡	700lm	1200lm	1600lm	2300lm	3400lm
⚡	220-240VAC 50/60Hz				
💡	SMD 2835				
🌈	2700K / 3000K / 4000K / 6000K				
Ra	≥80				
🔆	60°				
🔌	Remote electronic power supply				
📷	PHASE/1-10V /DALI as options				
📏					
IP44					



	LX-DL-1391-LED
⚡	1W/3W
💡	1W: 45Lm/3W: 110Lm
⚡	220-240VAC 50/60Hz
💡	Cree
🌈	2700K / 3000K / 4000K / 5000K
Ra	≥80 / ≥90
🔆	10° / 24° / 38°
🔌	Remote electronic power supply
📷	PHASE/1-10V /DALI as options
📏	
IP20	

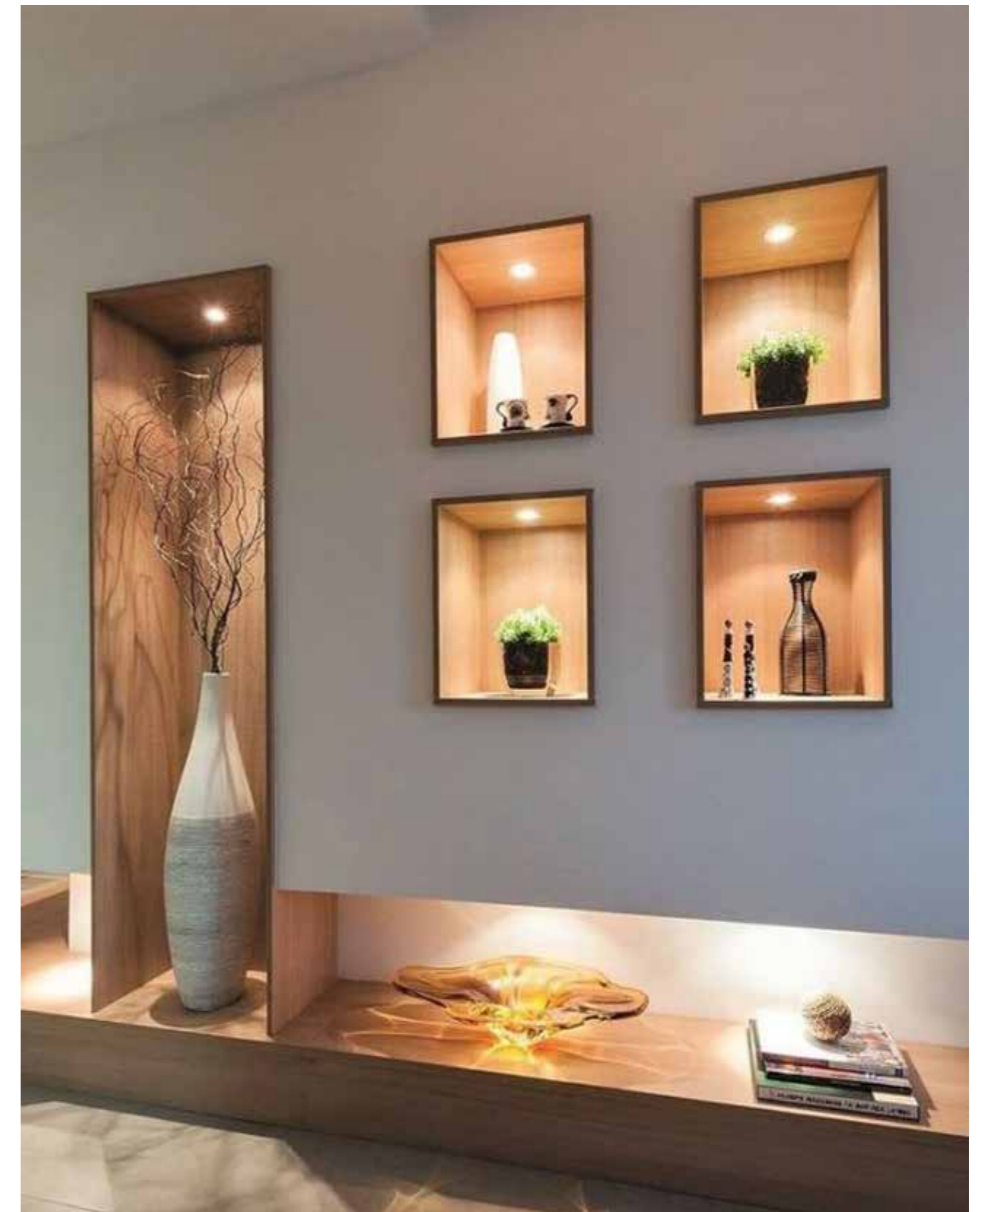


Optional adapter
Honeycomb Spread Lens

	LX-DL-1931-LED-10W
⚡	10W
⚡	AC220-240V
💡	643Lm
🌈	3000K/4000K
Ra	>90
📏	
IP20	





LX-DL-1341-LED-10W	LX-DL-1342-LED-20W	LX-DL-1343-LED-45W	LX-DL-1351-LED-21W	LX-DL-1352-LED-42W	LX-DL-1353-LED-63W
10W	20W	45W	21W	42W	63W
220-240VAC 50/60Hz					
770Lm	1540Lm	2310Lm	1 447Lm	2894Lm	4341Lm
3000K/4000K					
>90					
15°/24°/36°					

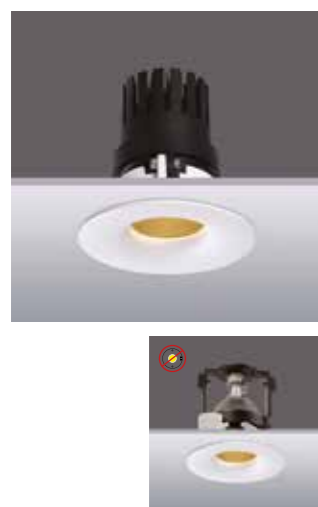

LX-DL-1881-LED	LX-DL-1882-LED	LX-DL-1883-LED	LX-DL-1884-LED
8W/12W			
8W: 560lm / 12W: 760lm		8W: 550lm / 12W: 760lm	
220-240VAC 50/60Hz			
Bridgelux / Cree COB			
2700K / 3000K / 4000K / 5000K			
≥80 / ≥90			
24°			
Remote electronic power supply			
PHASE/1-10V / DALI as options			
GU10 - GU5.3 / MAX 50W MR16 / 20W-35W			
84mm IP 20/40 88mm	90mm IP20 88mm	95mm IP 20/40 88mm 88mm	95mm IP20 88mm 88mm



LX-DL-11101-LED	LX-DL-11501-LED	LX-DL-11751-LED	LX-DL-11951-LED	LX-DL-12201-LED
6W / 9W / 13W	11W / 15W / 23W	25W / 30W / 40W		
6W: 437Lm/9W: 639Lm/13W: 892Lm	11W: 814Lm/15W: 1228Lm/23W: 1778Lm	25W: 1822Lm/30W: 2319Lm/40W: 3331Lm		
220-240VAC 50/60Hz				
Lumileds Luxeon 3535L SMD				
3000K / 4000K / 5700K				
≥80				
90°				
Remote electronic power supply				
PHASE/1-10V / DALI as options				
79mm IP 20/44 110mm	82mm 150mm	82mm 175mm	96mm 195mm	96mm 220mm



LX-DL-11102-LED	LX-DL-11502-LED	LX-DL-11752-LED	LX-DL-11952-LED	LX-DL-12202-LED
8W/12W	15W / 18W / 23W	23W / 36W / 42W		
8W: 690lm / 12W: 943lm	15W: 1299lm / 18W: 1666lm / 23W: 2073lm	23W: 2326lm / 36W: 3186lm / 42W: 3715lm		
220-240VAC 50/60Hz				
Citizen / Cree / Bridgelux COB				
2700K / 3000K / 4000K / 6000K				
≥80 / ≥90				
24° / 40°	16° / 26° / 40° / 60°			
Remote electronic power supply				
PHASE/1-10V / DALI as options				
85mm IP20 110mm	104mm 150mm	104mm 175mm	120mm 195mm	120mm 220mm



	LX-DL-25125F-LED	LX-DL-25125L-LED
⚡	25W	
💡	1600 lm	1800 lm
⚡	220-240VAC 50/60Hz	
☀️	CREE COB	SMD 2835
🌈	2700K / 3000K / 4000K	
Ra	≥80	
📐	10° / 20° / 30°	60°
🔌	Remote electronic power supply	
📺	PHASE/1-10V /DALI as options	
📏		
📷		
IP20		








	LX-DL-11601-LED	LX-DL-11602-LED	LX-DL-W11601-LED	LX-DL-W11602-LED
⚡	15W / 18W / 23W / 30W			
💡	15W: 1250lm / 18W: 1650lm / 23W: 2071lm / 30W: 2400lm			
🔌	220-240VAC 50/60Hz			
☀️	Citizen / Cree / Bridgelux COB			
🌈	2700K / 3000K / 4000K / 5000K			
Ra	≥80 / ≥90			
📐	16° / 26° / 40° / 50°			
🔌	Remote electronic power supply			
📷	PHASE/1-10V /DALI as options			
🚫	E27 / MAX 70W			
📏				
	158mm 160mm	165mm 160mm	158mm 143mm	165mm 143mm
IP20				




	LX-DL-11861-LED	LX-DL-11862-LED	LX-DL-W11861-LED	LX-DL-W11862-LED
⚡	15W / 18W / 23W			
💡	15W:1209Lm/18W:1275Lm /23W:1557Lm	15W:1168Lm/18W:1268Lm /23W:1461Lm	15W:1209Lm/18W:1275Lm /23W:1557Lm	15W:1168Lm/18W:1268Lm /23W:1461Lm
🔌	220-240VAC 50/60Hz			
☀️	Bridgelux COB			
🌈	2700K / 3000K / 4000K / 5000K			
Ra	≥80			
📐	15° / 26° / 40° / 60°			
🔌	Remote electronic power supply			
📷	PHASE/1-10V /DALI as options			
🚫	E27 / MAX 70W			
📏				
	158mm 186mm	165mm 186mm	158mm 164mm	165mm 164mm
IP20				



	LX-DL-12231-LED	LX-DL-12232-LED	LX-DL-W12231-LED	LX-DL-W12232-LED
⚡	23W / 36W / 42W			
💡	23W: 2004lm / 36W: 2800lm / 42W: 3300lm			
🔌	220-240VAC 50/60Hz			
☀️	Citizen / Cree / Bridgelux COB			
🌈	2700K / 3000K / 4000K / 5000K			
Ra	≥80 / ≥90			
📐	16° / 26° / 40° / 60°			
🔌	Remote electronic power supply			
📷	PHASE/1-10V /DALI as options			
📏				
	205mm 223mm	205mm 223mm	205mm 201mm	205mm 201mm
IP20				

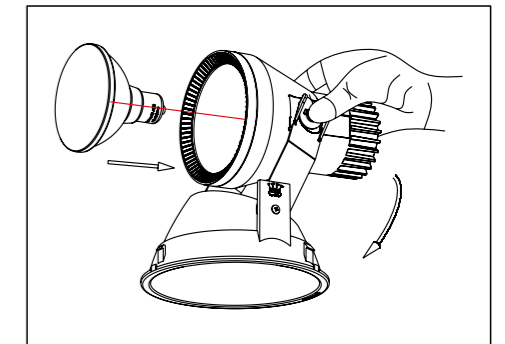

Only gently press by thumb and index finger, lamp body can be turned, so replace the light source is more convenient.

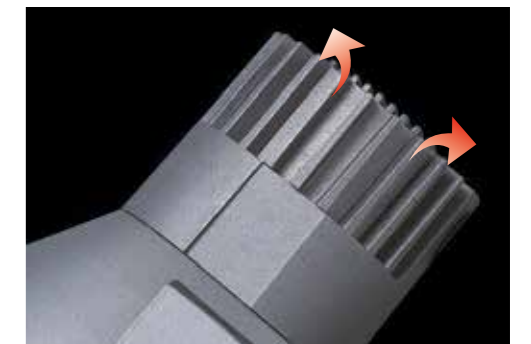


Dissipate heat design of the upper and lower convection increases the service life of the light source.



LX-DL-12751-LED	
⚡	25W / 30W / 40W
💡	25W: 1822lm / 30W: 2319lm / 40W: 3331lm
⚡	220-240VAC 50/60Hz
☀️	Lumileds Luxeon 3535L SMD
🌈	3000K / 4000K / 5700K
Ra	≥80
📏	°90
🔌	Remote electronic power supply
📷	PHASE/1-10V /DALI as options
📏	
IP	20/40

LX-DL-12752-LED	
⚡	23W / 36W / 42W
💡	23W: 2326lm / 36W: 3186lm / 42W: 3715lm
⚡	220-240VAC 50/60Hz
☀️	Citizen / Cree / Bridgelux COB
🌈	2700K / 3000K / 4000K / 5000K
Ra	≥80 / ≥90
📏	16° / 26° / 40° / 60°
🔌	Remote electronic power supply
📷	PHASE/1-10V /DALI as options
📏	
IP	20

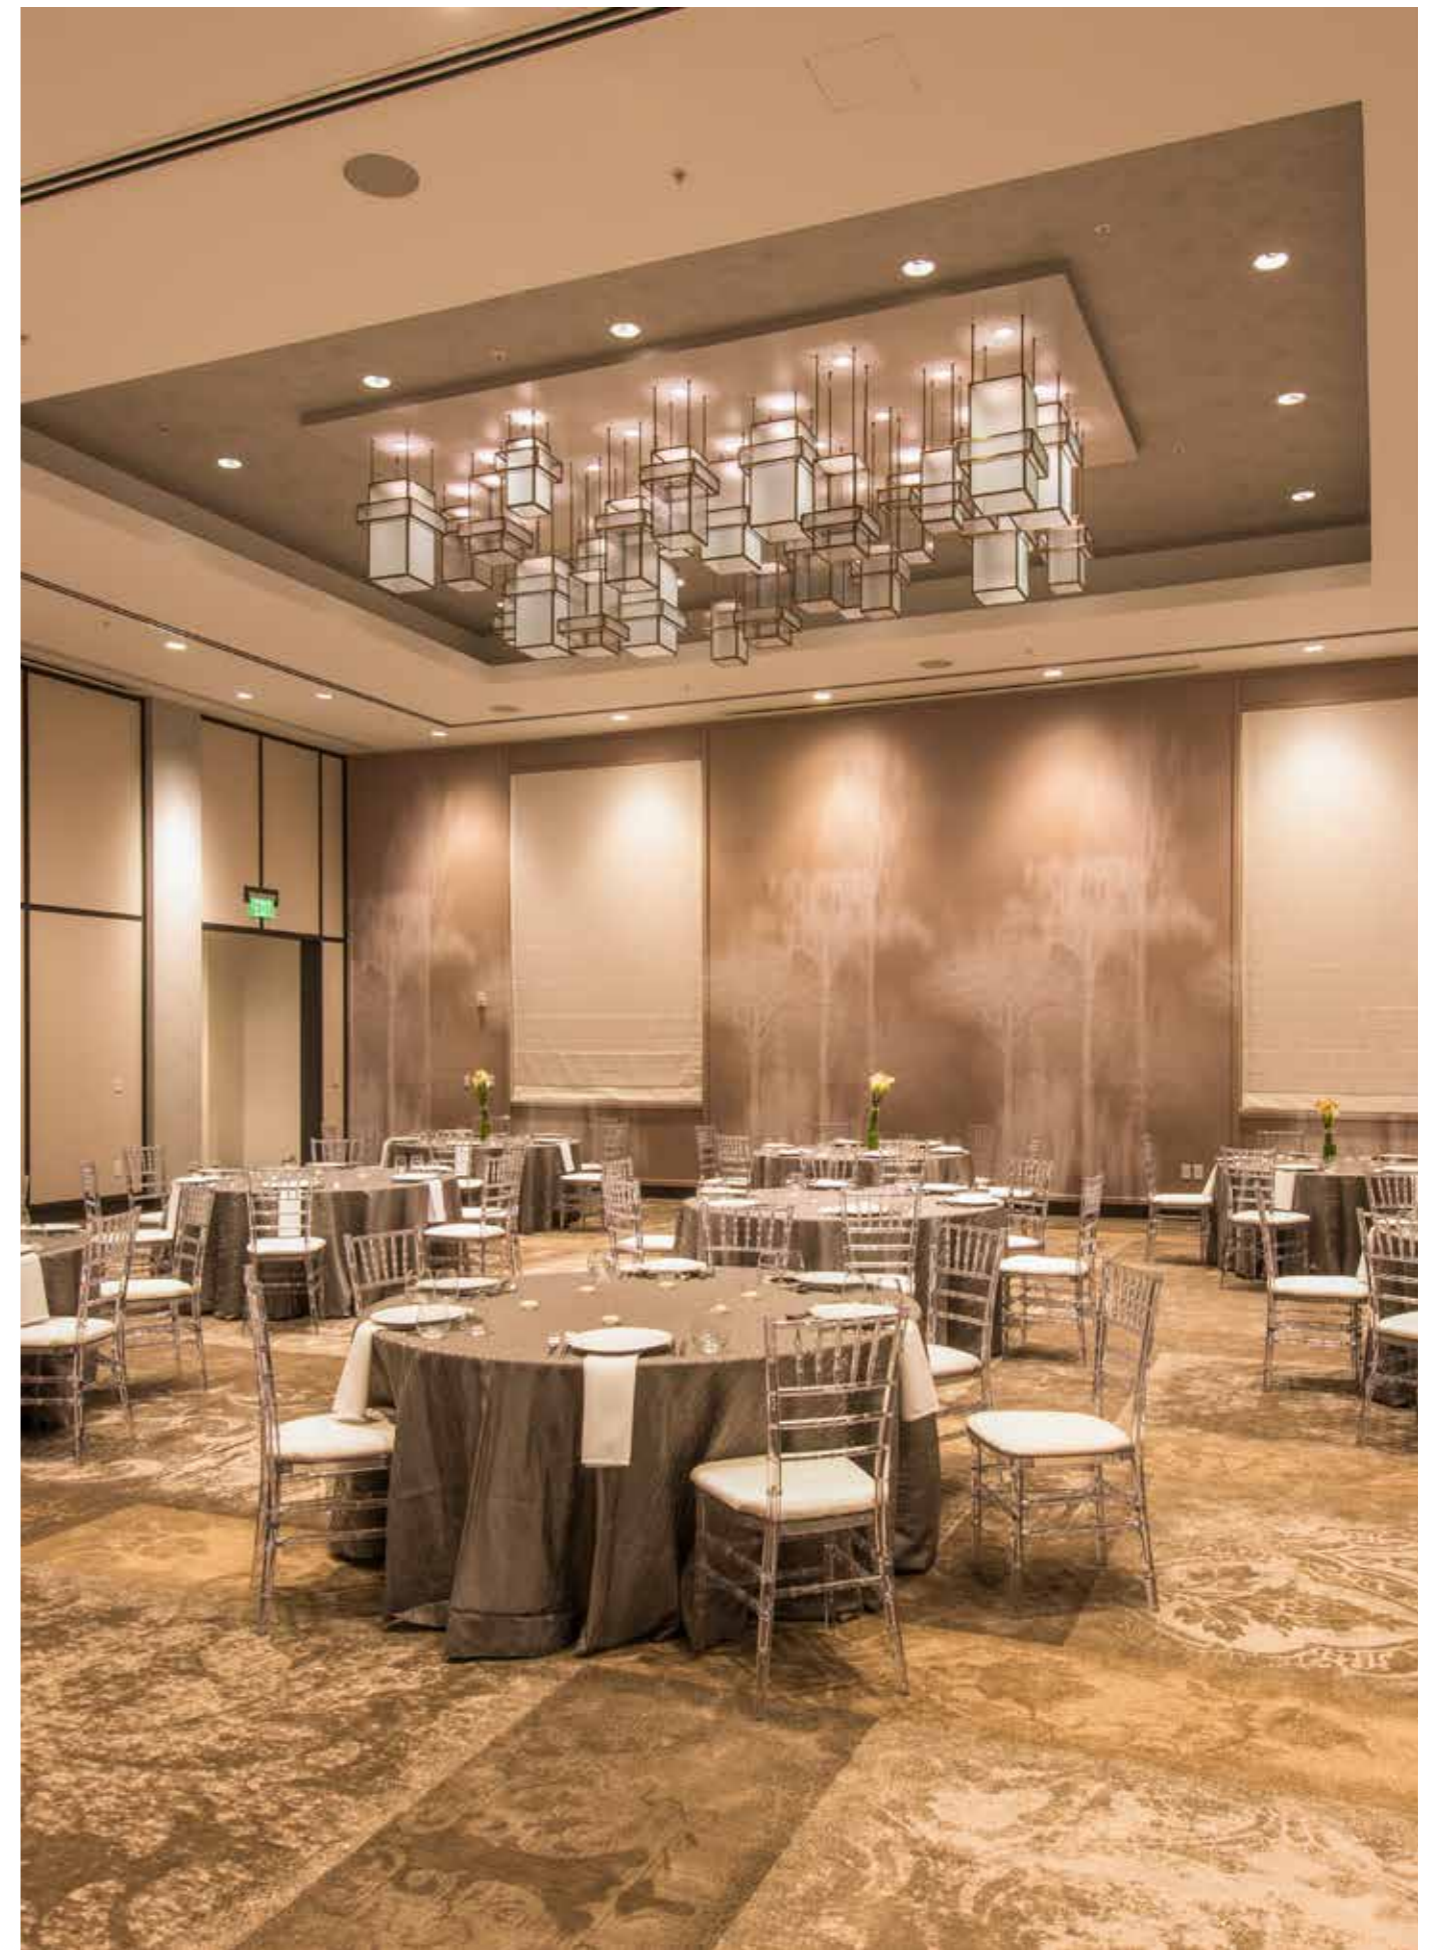

WALL WASHER DOWNLIGHT



	LX-DL-01075W-LED	LX-DL-W01075WT-LED	LX-DL-01075WS-LED	LX-DL-W01075WST-LED
⚡	12W			
💡	720 lm			
⚡	220-240VAC 50/60Hz			
💡	Cree COB			
🌈	2700K / 3000K / 4000K / 5000K			
Ra	≥90			
📏	wallwasher			
🔌	Remote electronic power supply			
📡	PHASE/1-10V /DALI as options			
📏				
IP20				


	LX-DL-1222-LED
⚡	1W/Pcs
💡	90 lm / Pcs
⚡	220-240VAC 50/60Hz
🌈	3000K/4000K
Ra	>80
📏	15°/30°/45°
📏	
IP20	



	LX-DL-13051-LED	LX-DL-12091-LED	LX-DL-11131-LED
⚡	30W	20W	10W
💡	30W: 2398Lm	20W: 950Lm	10W: 744Lm
⚡	220-240VAC 50/60Hz		
💡	Cree		
🌈	2700K / 3000K / 4000K / 5000K		
Ra	≥80		
📏	13°/29°/41°/52°/16°x36°		
🔌	Remote electronic power supply		
📡	PHASE/1-10V /DALI as options		
📏			
IP20			

Installation Steps

- Make a cutout in the ceiling suitable for the fitting.
- Insert the pre-mounted kit to the ceiling, and fasten it by 4 screws.
- Plaster ceiling to hide screws and pre-mounted kit.
- Turn off the power switch.
- Connect the power wire with the LED power supply, and insert the fitting into the mounted kit, until it locked.
- Removal or replacement: Use the dismantled device to insert the mini hold on the side, and then pull down carefully.

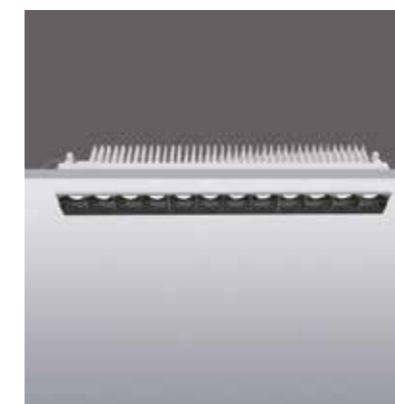


	LX-DL-W13051-LED	LX-DL-W12091-LED	LX-DL-W11131-LED
⚡	30W	20W	10W
💡	30W: 2398Lm	20W: 1522Lm	10W: 744Lm
⚡	220-240VAC 50/60Hz		
💡	Cree		
🌈	2700K / 3000K / 4000K / 5000K		
Ra	≥80		
📏	13°/29°/41°/52°/16°x36°		
🔌	Remote electronic power supply		
📡	PHASE/1-10V /DALI as options		
📏			
IP20			


Optional adapter
 
 Honeycomb Spread Lens


			
	LX-DL-1327-LED-7.5W	LX-DL-1328-LED-15W	LX-DL-1329-LED-22.5W
	7.5W	15W	22.5W
	220-240VAC 50/60Hz		
	475Lm	950 Lm	1425Lm
	3000K/4000K		
Ra	>90		
	15°/24°/36°		
			
	IP20		

Optional adapter
 
 Honeycomb Spread Lens

						
	LX-DL-1321-LED-1.5W	LX-DL-1322-LED-3W	LX-DL-1323-LED-4.5W	LX-DL-1324-LED-7.5W	LX-DL-1325-LED-15W	LX-DL-1326-LED-22.5W
	1.5W	3W	4.5W	7.5W	15W	22.5W
	220-240VAC 50/60Hz					
	95Lm	190Lm	285Lm	475Lm	950Lm	1425Lm
	3000K/4000K					
Ra	>80					
	15°/30°/45°					
						
	IP20					

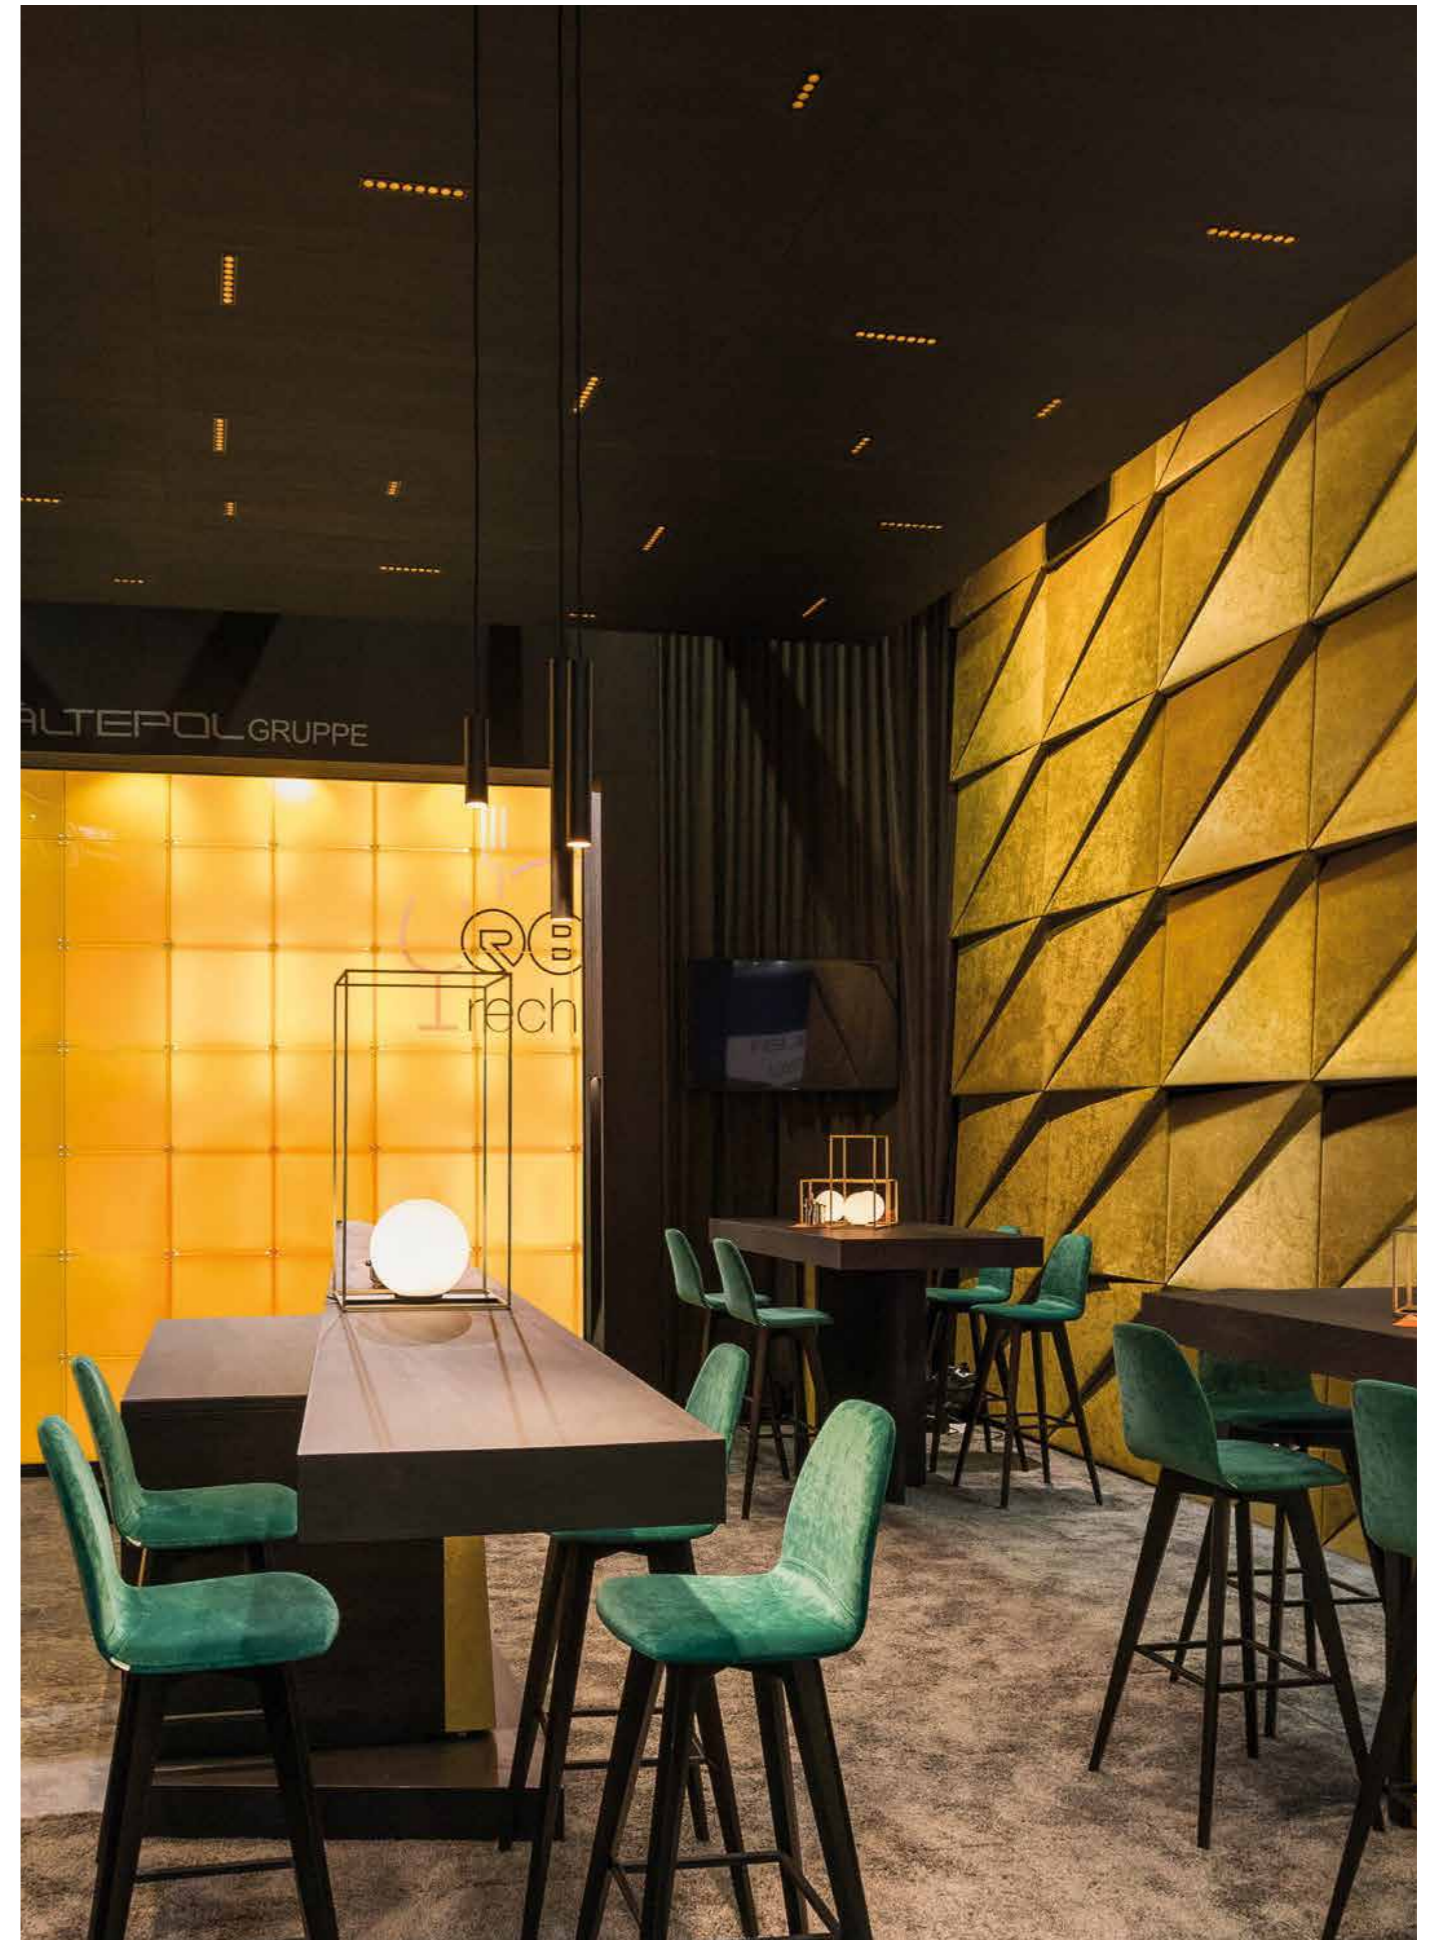

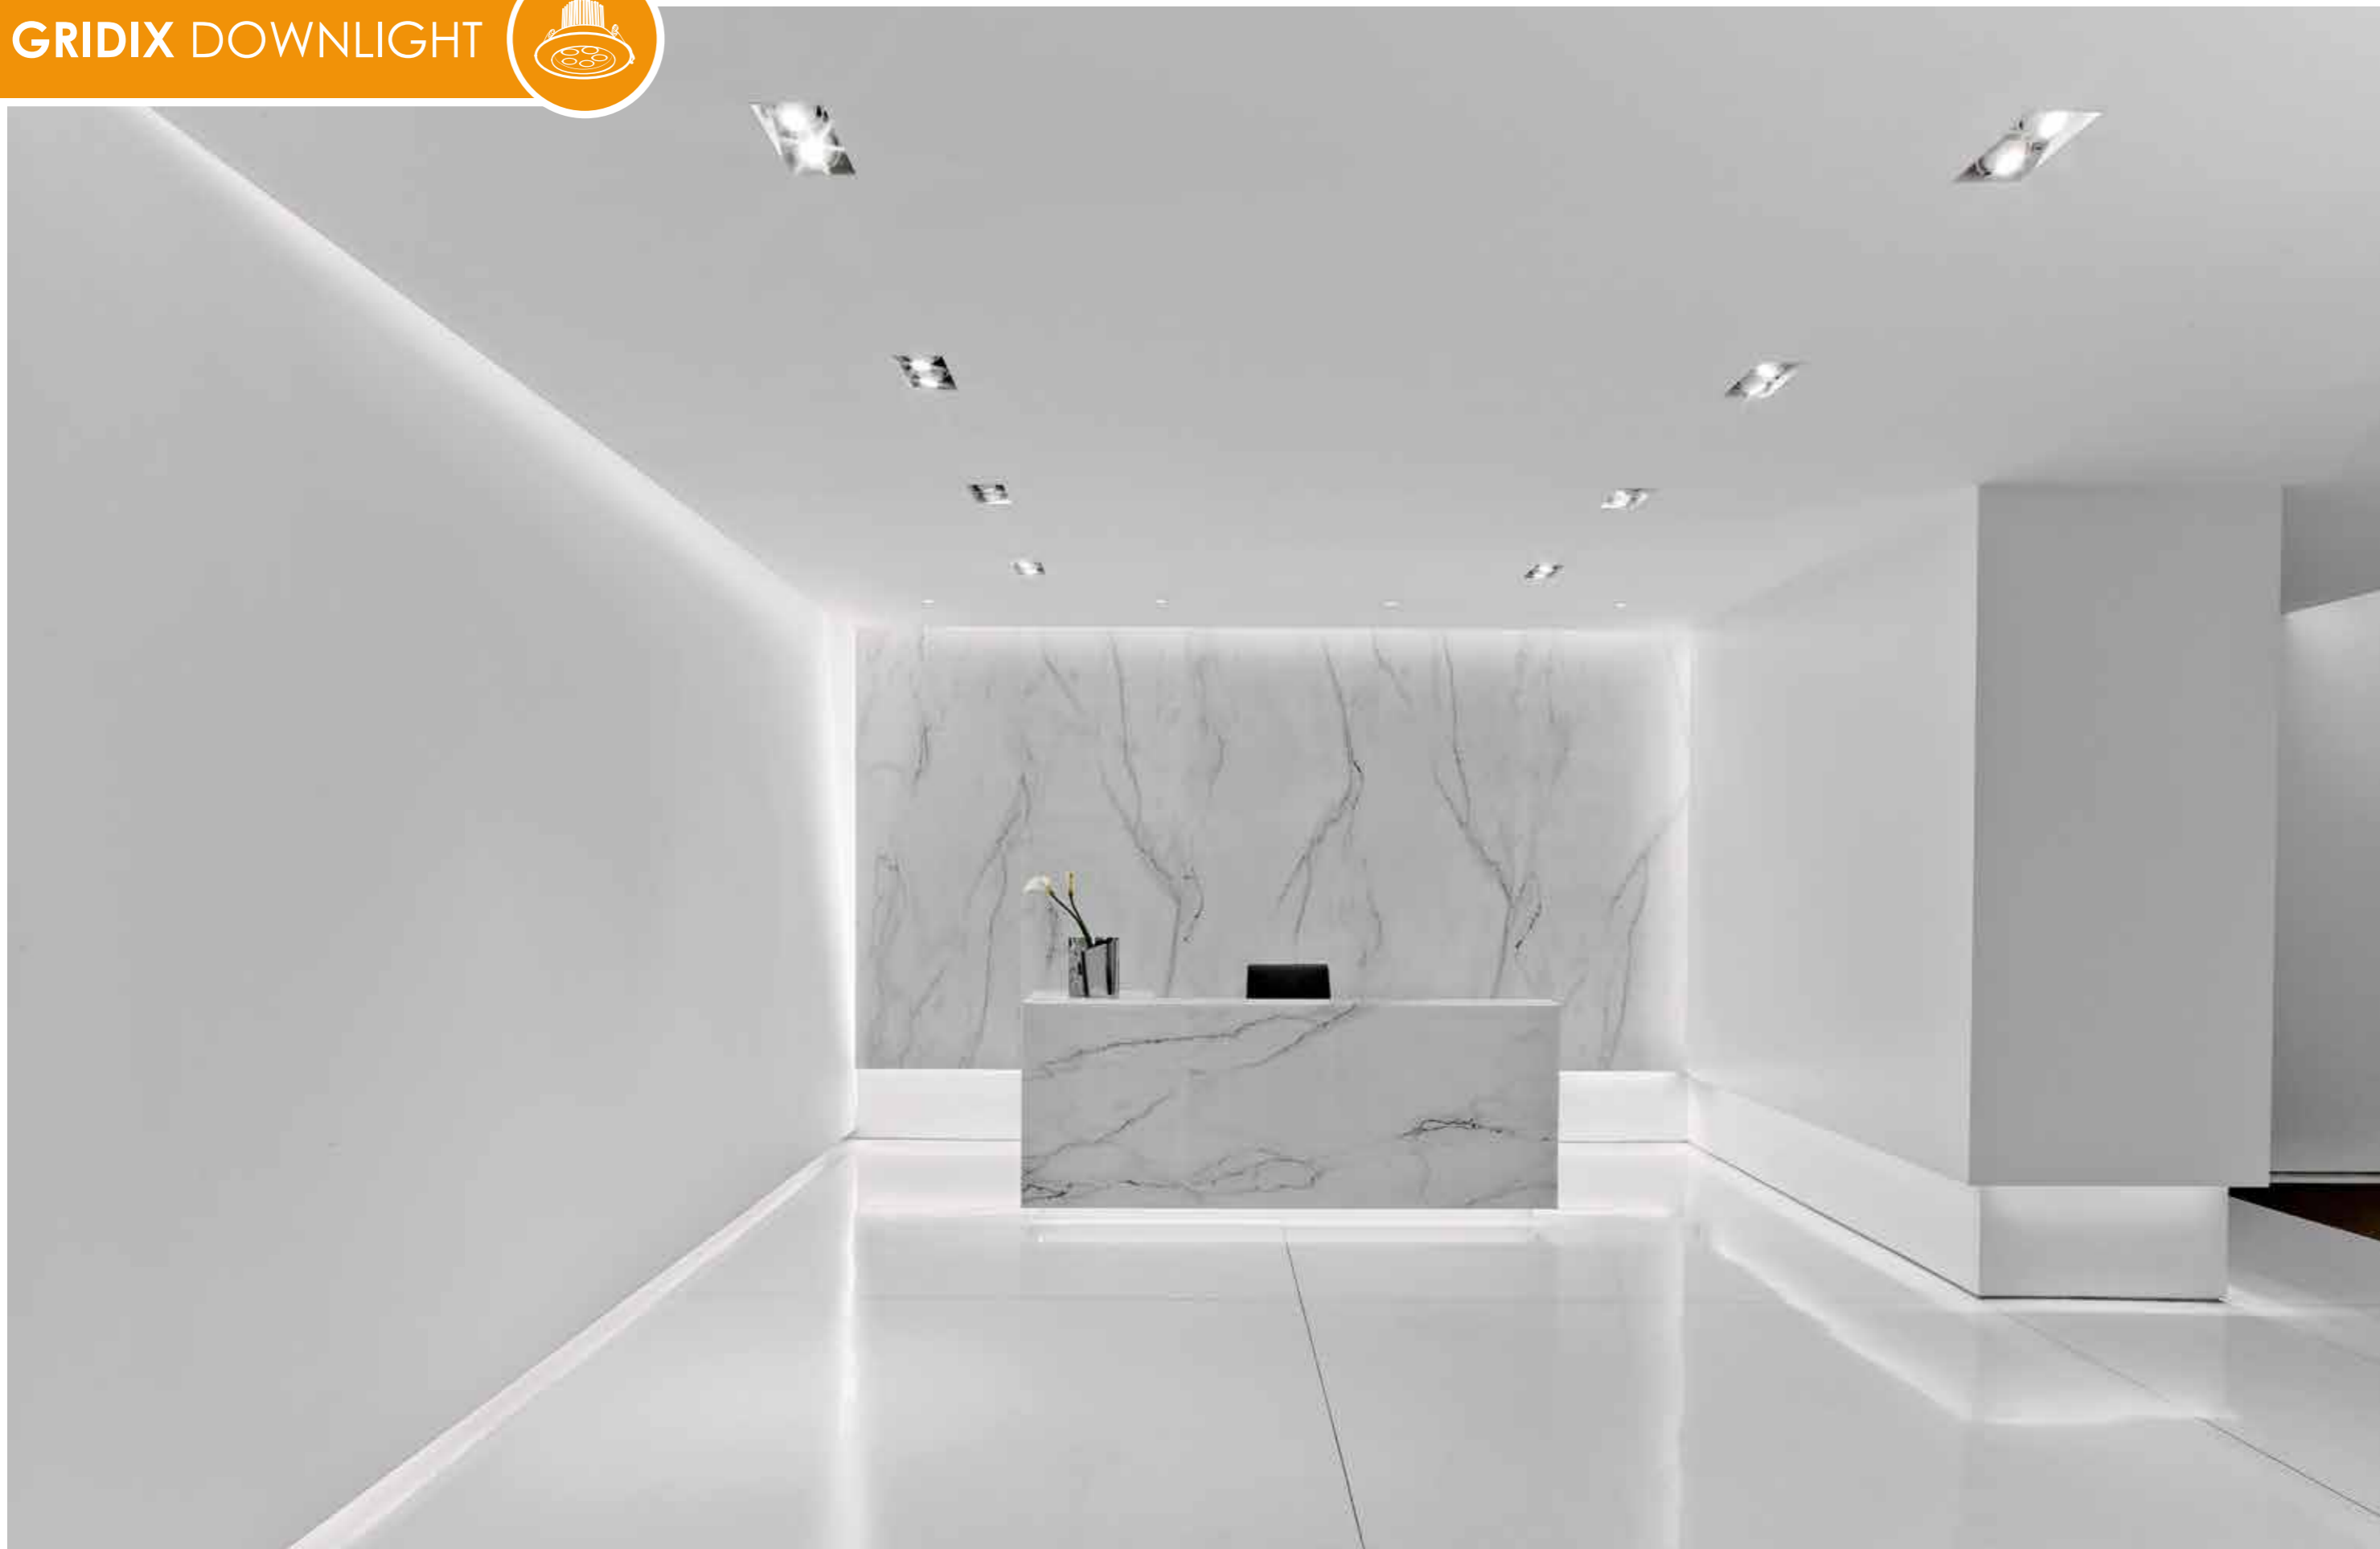

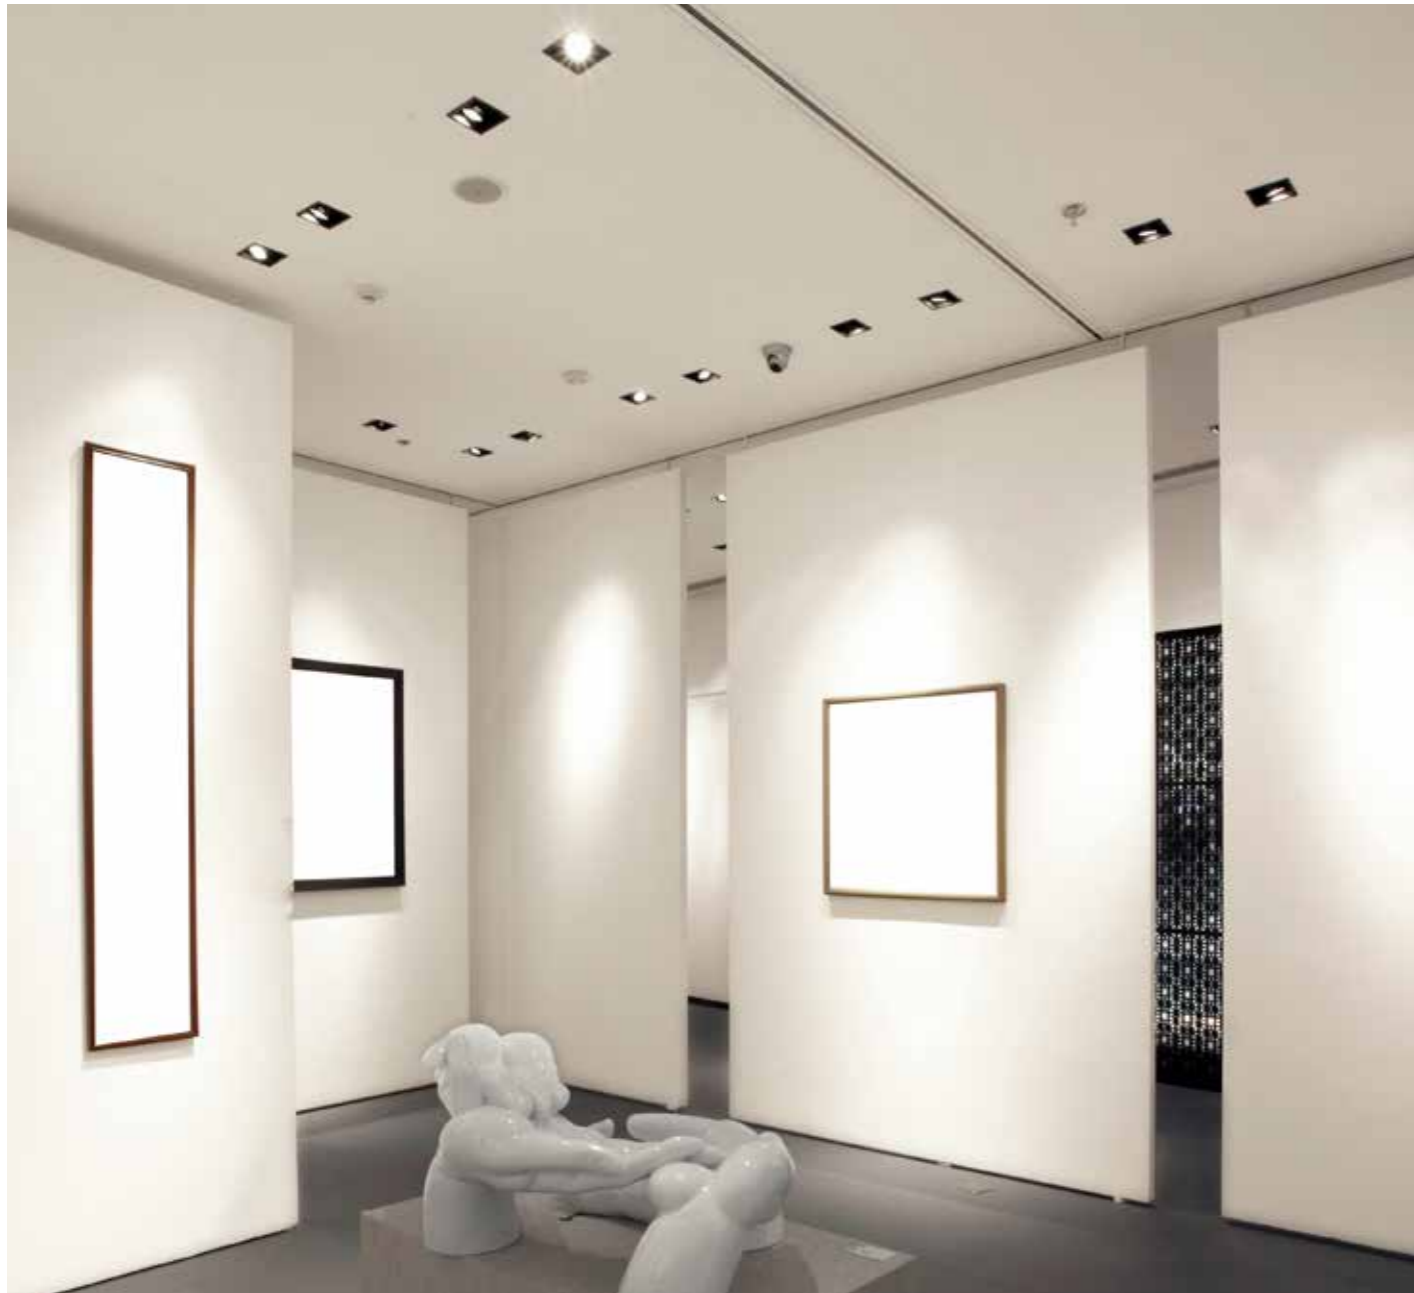

WITHOUT LAMP

	LX-DL-2111	LX-DL-2112	LX-DL-2113	LX-DL-W2211	LX-DL-W2212	LX-DL-W2213
⚡	Max. 70W	2xMax. 70W	3xMax. 70W	Max. 70W	2xMax. 70W	3xMax. 70W
💡	QR111 G53 / CDM-R111 GX8.5					
🔌	12V / 220-240V					
📐	8° / 24°					
📏						
🛡️	IP20					




	LX-DL-2161-LED	LX-DL-2162-LED	LX-DL-2163-LED	LX-DL-W2761-LED	LX-DL-W2762-LED	LX-DL-W2763-LED
⚡	8W/12W	16W/24W	24W/36W	8W/12W	16W/24W	24W/36W
💡	8W: 654Lm/12W: 888Lm	16W: 1308Lm/ 24W: 1776Lm	24W: 1962Lm/ 36W: 2664Lm	8W: 654Lm/12W: 888Lm	16W: 1308Lm/ 24W: 1776Lm	24W: 1962Lm/ 36W: 2664Lm
🔌	220-240VAC 50/60Hz					
💡	Citizen / Cree / Bridgelux COB					
📐	2700K / 3000K / 4000K / 5000K					
Ra	≥80 / ≥90					
📐	24°/40°					
🔌	Remote electronic power supply					
🔌	PHASE/1-10V /DALI as options					
🛡️	GU5.3 / 12V / Max 50W					
📏						
🛡️	IP20					



	LX-DL-2261-LED	LX-DL-2262-LED	LX-DL-2263-LED	LX-DL-W2661-LED	LX-DL-W2662-LED	LX-DL-W2663-LED
⚡	8W/12W	16W/24W	24W/36W	8W/12W	16W/24W	24W/36W
💡	8W: 654Lm/12W: 888Lm	16W: 1308Lm/ 24W: 1776Lm	24W: 1962Lm/ 36W: 2664Lm	8W: 654Lm/12W: 888Lm	16W: 1308Lm/ 24W: 1776Lm	24W: 1962Lm/ 36W: 2664Lm
🔌	220-240VAC 50/60Hz					
💡	Bridgelux /Cree COB					
📐	2700K / 3000K / 4000K / 5000K					
Ra	≥80					
📐	24°/40°					
🔌	Remote electronic power supply					
🔌	PHASE/1-10V /DALI as options					
🛡️	GU5.3 / 12V / Max 50W					
📏						
🛡️	IP20					





To Install the Trimmed Version

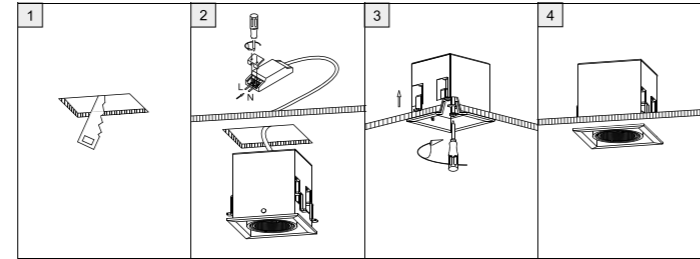

	LX-DL-2811-LED	LX-DL-2812-LED	LX-DL-2813-LED	LX-DL-W2811-LED	LX-DL-W2812-LED	LX-DL-W2813-LED
⚡	15W/18W/23W	30W/36W/46W	45W/54W/69W	15W/18W/23W	30W/36W/46W	45W/54W/69W
💡	15W:1299lm /18W: 1666lm / 23W: 2073lm	30W: 2598lm /36W: 3332lm /46W: 4146lm	45W:3097lm /54W: 4998lm /69W: 6219lm	15W:1299lm /18W: 1666lm / 23W: 2073lm	30W: 2598lm /36W: 3332lm /46W: 4146lm	45W:3097lm /54W: 4998lm /69W: 6219lm
🔌	220-240VAC 50/60Hz					
🌞	Citizen / Cree / Bridgelux COB					
🌈	2700K / 3000K / 4000K / 5000K					
Ra	≥80 / ≥90					
📏	16° / 26° / 40° / 60°					
🔧	Remote electronic power supply					
🕒	PHASE/1-10V /DALI as options					
📐						
IP20						



To Install the Trimless Version

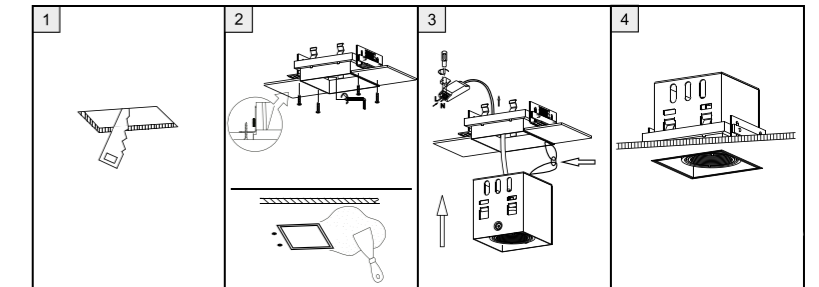

	LX-DL-2911-LED	LX-DL-2912-LED	LX-DL-2913-LED	LX-DL-W2911-LED	LX-DL-W2912-LED	LX-DL-W2913-LED
⚡	23W / 36W / 42W	46W /72W / 84W	69W /108W /126W	23W / 36W / 42W	46W /72W / 84W	69W /108W /126W
💡	23W: 2326lm / 36W: 3186lm / 42W: 3715lm	46W:4652lm /72W: 6372lm /84W: 7430lm	69W:6978lm/108W:9558 lm/126W:11145lm	23W: 2326lm / 36W: 3186lm / 42W: 3715lm	46W:4652lm /72W: 6372lm /84W: 7430lm	69W:6978lm/108W:9558 lm/126W:11145lm
🔌	220-240VAC 50/60Hz					
🌞	Citizen / Cree / Bridgelux COB					
🌈	2700K / 3000K / 4000K / 5000K					
Ra	≥80 / ≥90					
📏	16° / 26° / 40° / 60°					
🔧	Remote electronic power supply					
🕒	PHASE/1-10V /DALI as options					
📐						
IP20						



	LX-DL-C661220-LED	LX-DL-C661230-LED	LX-DL-C661245-LED
⚡	40W	60 W	90 W
💡	3800 Lm	5000 Lm	6840 Lm
⚡	220-240VAC 50/60Hz		
💡	CREE COB		
🌈	3000K		
Ra	≥80		
📐	24°		
🔌	Remote electronic power supply		
📷	PHASE/1-10V /DALI as options		
🚫	G5.3 Max 50W		
📏			
IP20			



	LX-DL-C6331
⚡	Max. 7W
💡	GU10
⚡	12V / 220-240V
📐	40°
📏	
IP20	



	LX-DL-H993815-LED	LX-DL-H9938-LED
	9 W	15 W / 20W
	780 Lm	15W: 1380 Lm / 20W: 1900 Lm
	220-240VAC 50/60Hz	
	CREE	
	3000K / 4000K	
Ra	≥ 80	
	24° / 15° / 36°	
	Remote electronic power supply	
	PHASE/1-10V /DALI as options	
	GU10 MAX 50W/7W	E27 MAX 50W/7W
	IP65	

Optional colors:




	LX-DL-C6761202-LED	LX-DL-C6761302-LED	LX-DL-6761452-LED
	40 W	60 W	90 W
	3800 Lm	5000 Lm	8000 Lm
	220-240V AC 50/60Hz		
	Cree		
	3000K		
Ra	≥ 80		
	60°		
	Remote electronic power supply		
	PHASE/1-10V /DALI as options		
	 Optional colors:		 Optional colors:
	IP20		




	LX-DL-C6771	LX-DL-C6711
⚡	Max 50W / MAX 7W	
💡	GU10 QPAR16 / GU10-LED PAR16	
	 Optional colors <input type="radio"/> <input type="radio"/>	 Optional colors <input type="radio"/> <input type="radio"/>
		
IP20		

	LX-DL-C6871-LED	LX-DL-C6891-LED
⚡	9W / 15 W / 20W	15W / 20 W / 30W /37W
💡	9W:730Lm/ 15W:1290 Lm /20W:1900Lm	15W:1290Lm / 20W:1900 Lm / 30W:2500Lm / 37W:3500Lm
🔌	220-240VAC 50/60Hz	
🌞	CREE	
🌈	3000K	
Ra	≥80	
📏	24°	
🔧	Remote electronic power supply	
📷	PHASE/1-10V /DALI as options	
	 Optional colors <input type="radio"/> <input type="radio"/>	
		
IP20	130 100(GU10) 165(20W)	120(15W) 140(20W/PAR20) 180(30W) 200(37W)
		 E27 1x 7W / 50W

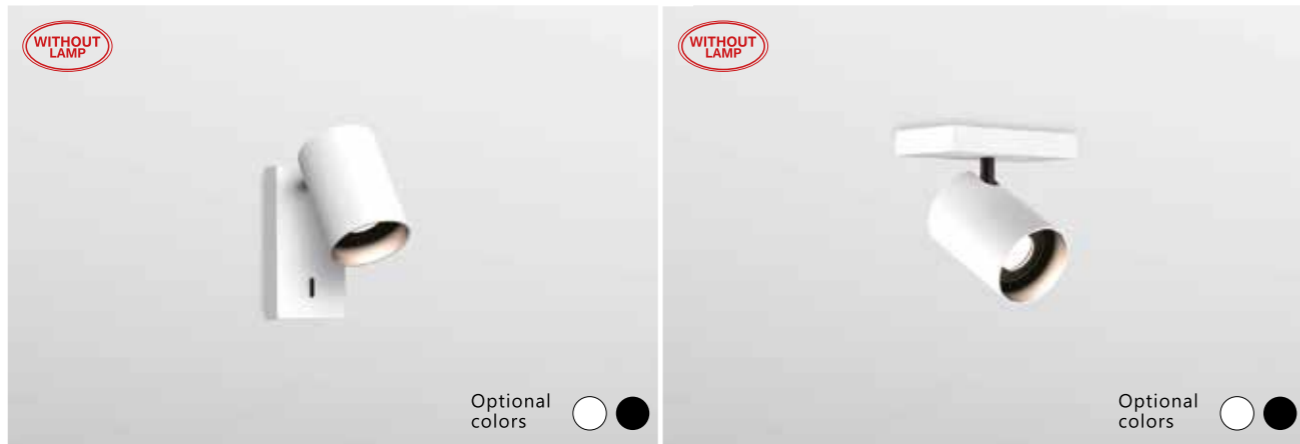

	LX-DL-C6801	LX-DL-C6721
⚡	Max 50W / MAX 7W	
💡	GU10 QPAR16 / GU10-LED PAR16	
📏		
IP20		

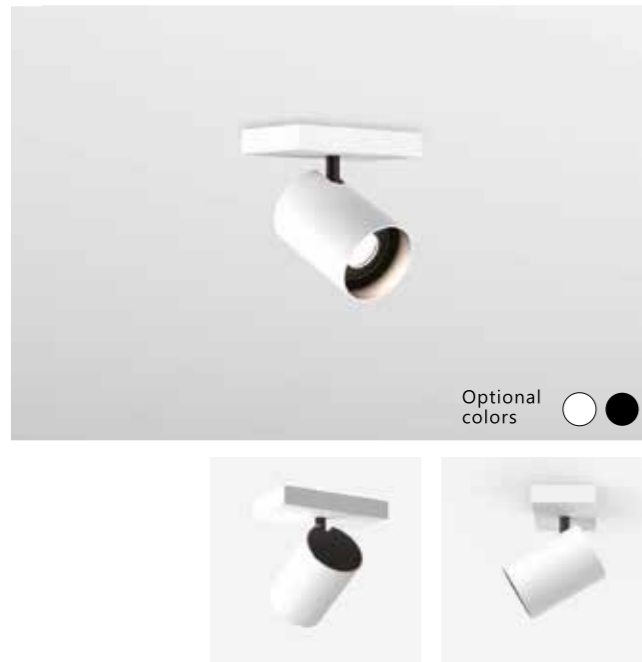

	LX-DL-C6721-LED
⚡	9W / 15 W
💡	9W:730Lm / 15W:1290 Lm
🔌	220-240V AC 50/60Hz
☀️	CREE
🌈	3000K
Ra	≥ 80
📐	24°
🔌	Remote electronic power supply
🔄	PHASE/1-10V /DALI as options
📏	
IP20	

	LX-DL-C6723-LED
⚡	27W / 45 W
💡	27W:2190Lm / 45W:3870Lm
🔌	220-240VAC 50/60Hz
☀️	CREE
🌈	3000K
Ra	≥ 80
📐	24°
🔌	Remote electronic power supply
🔄	PHASE/1-10V /DALI as options
🚫	GU10 MAX 50W-7W
📏	
IP20	




	LX-DL-C6722-LED
⚡	18W / 30 W
💡	18W:1460Lm / 30W:2580 Lm
🔌	220-240VAC 50/60Hz
☀️	CREE
🌈	3000K
Ra	≥ 80
📐	24°
🔌	Remote electronic power supply
🔄	PHASE/1-10V /DALI as options
🚫	GU10 MAX 50W-7W
📏	
IP20	






HOUSING'S COLOR





	LX-DL-2675A-LED	LX-DL-W2675AT-LED	LX-DL-2690A-LED	LX-DL-W2690AT-LED	LX-DL-26105A-LED	LX-DL-W26105AT-LED
⚡	3W		7W		18W	
💡	180 lm		420 lm		1080 lm	
⚡	220-240VAC 50/60Hz					
☀️	Cree					
🌈	2700K / 3000K / 4000K					
Ra	≥90					
📐	15° / 24° / 36°		15° / 24° / 36° / Random beam angle:15°-36°			
🔌	Remote electronic power supply					
📷	PHASE/1-10V /DALI as options					
📏						
IP20						

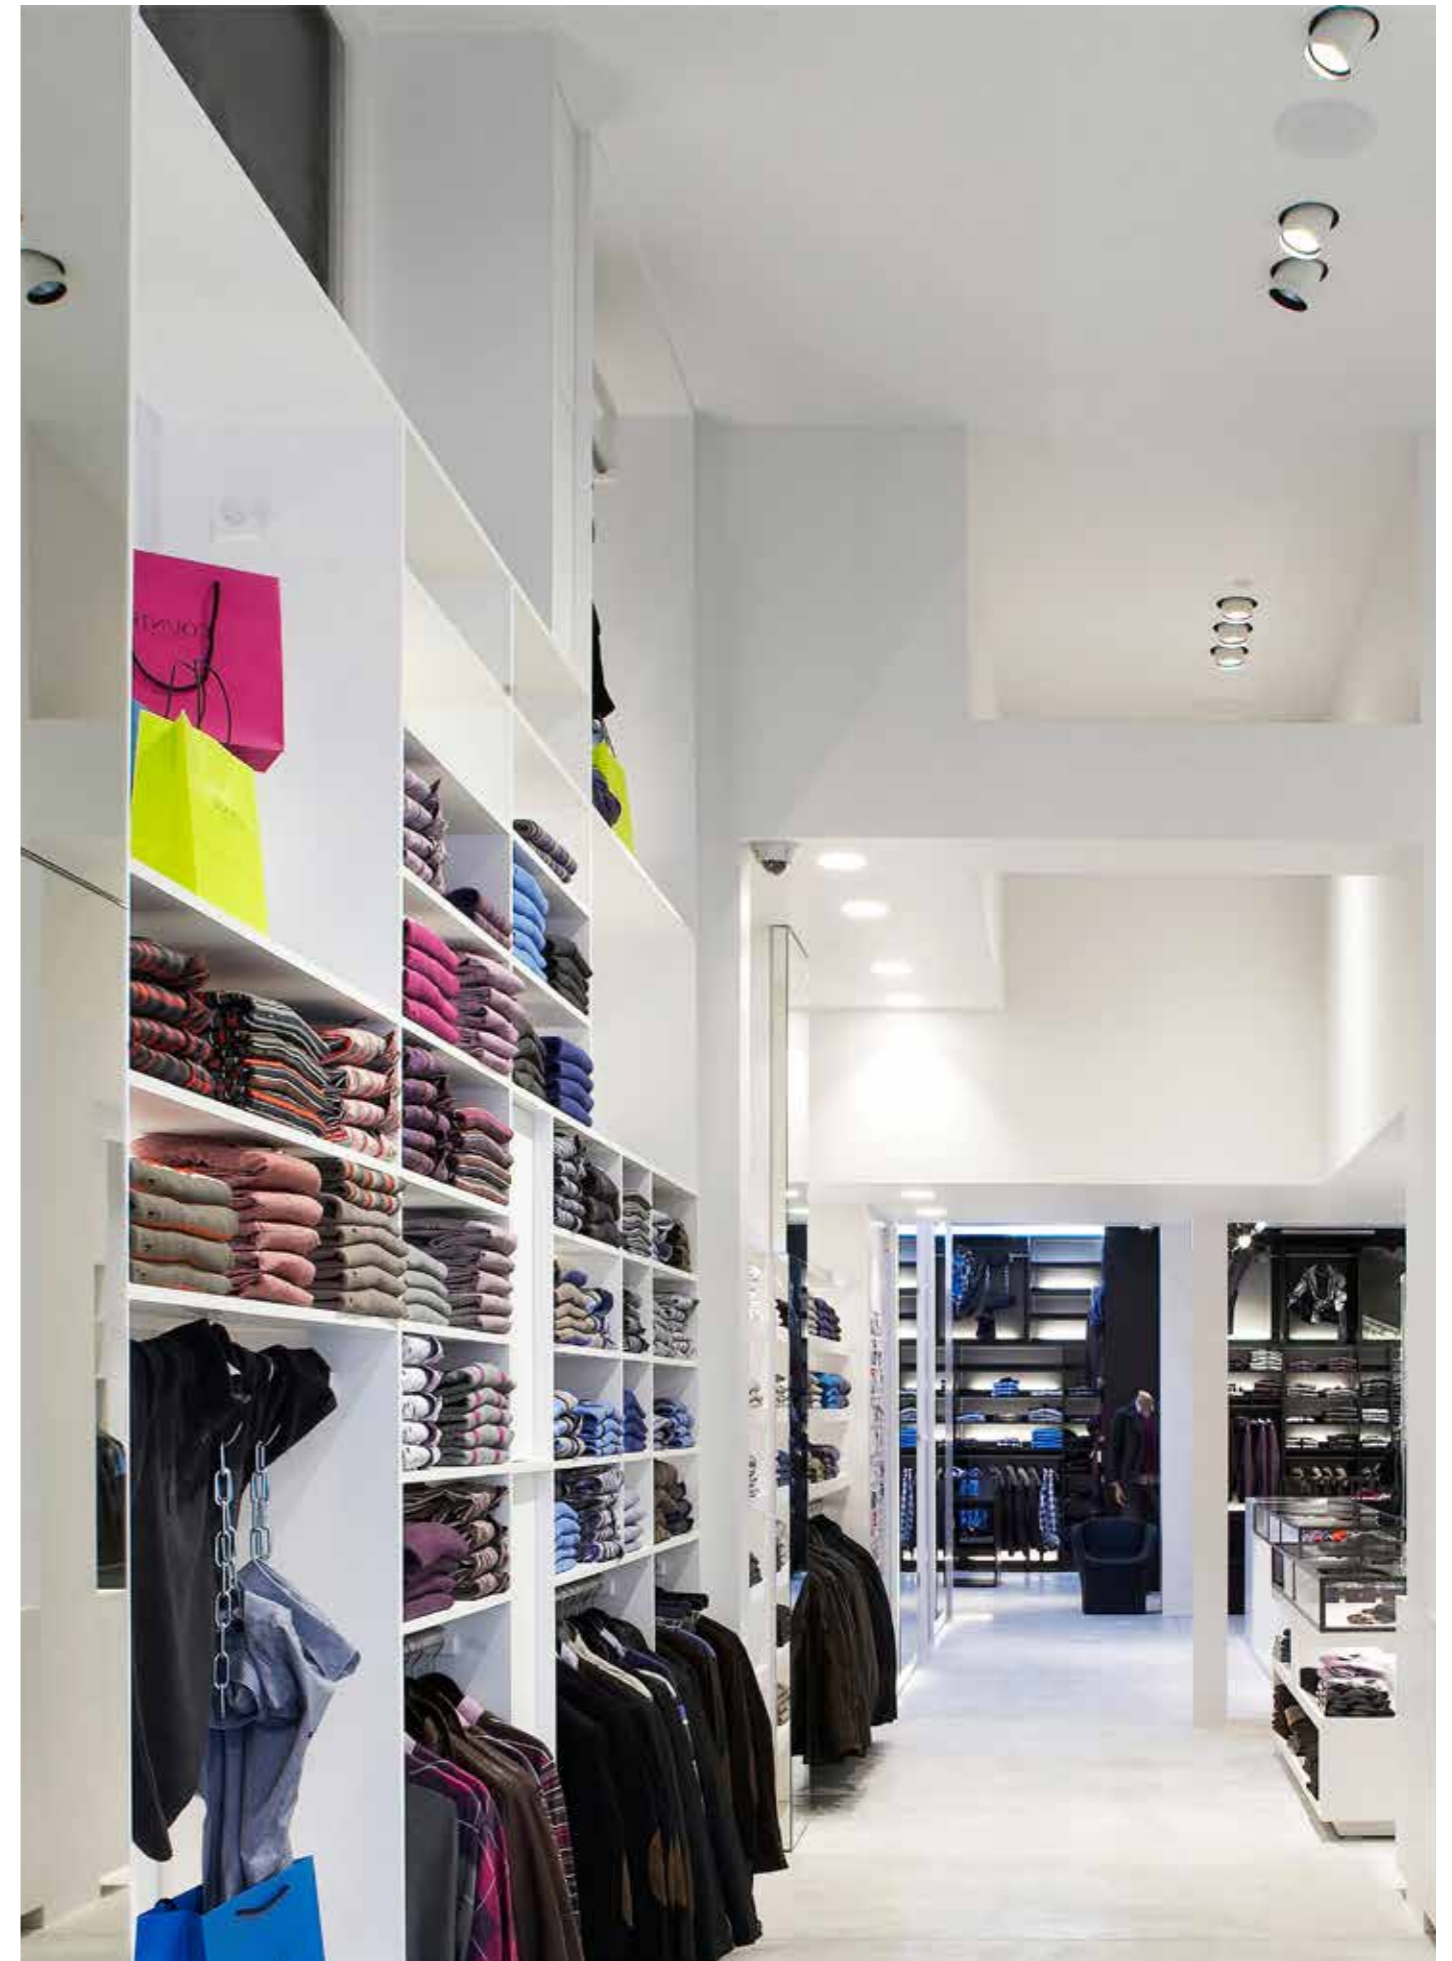	LX-DL-27110A-LED	LX-DL-W27110AT-LED	LX-DL-26135A-LED	LX-DL-W26135AT-LED	LX-DL-25165A-LED	LX-DL-W25165AT-LED
⚡	6W		14W		36W	
💡	360 lm		840 lm		2160 lm	
⚡	220-240VAC 50/60Hz					
☀️	Cree					
🌈	2700K / 3000K / 4000K					
Ra	≥90					
📐	15° / 24° / 36°		15° / 24° / 36° / Random beam angle:15°-36°			
🔌	Remote electronic power supply					
📷	PHASE/1-10V /DALI as options					
📏						
IP20						





















Optional adapter
 Honeycomb
 Spread Lens

	LX-DL-0521-LED	LX-DL-0531-LED-21W	LX-DL-0541-LED-28W
	8W/10W	21W	28W
	220-240VAC 50/60Hz		
	8W:629Lm/10W:770Lm	1447Lm	2120Lm
	3000K/4000K		
Ra	>90		
	6°/10°/15°/22°/30°		15°/24°/36°
			
IP20			




HOUSING'S COLOR




	LX-DL-2550A-LED	LX-DL-2560A-LED	LX-DL-2575A-LED
	3W	7W	18W
	180 lm	420 lm	1080 lm
	220-240VAC 50/60Hz		
	Cree		
	2700K / 3000K / 4000K		
Ra	≥90		
	15° / 24° / 36°	15° / 24° / 36° / Random beam angle:15°-36°	
	Remote electronic power supply		
	PHASE/1-10V /DALI as options		
			
IP20			



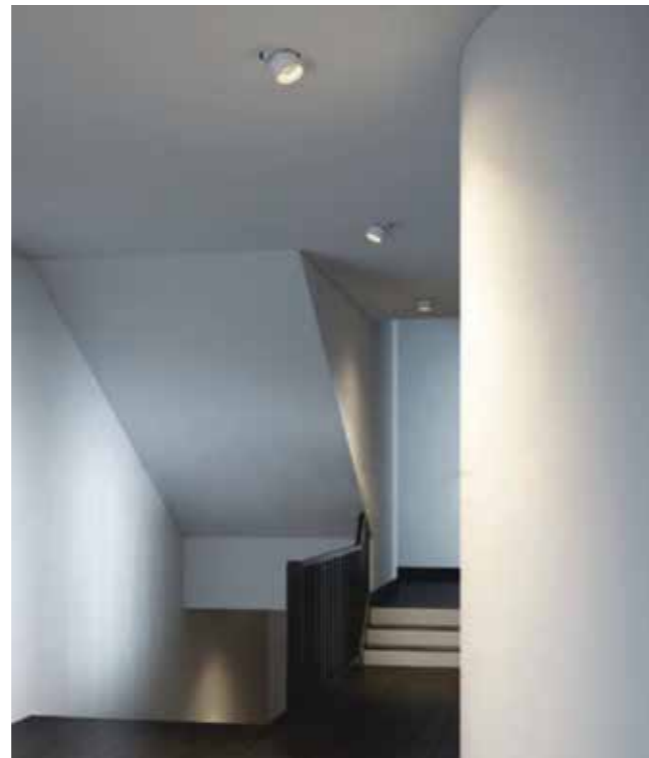

HOUSING'S COLOR




	LX-DL-2240A-LED	LX-DL-2340A-LED	LX-DL-2440A-LED
⚡	3W	7W	18W
💡	180 lm	420 lm	1080 lm
⚡	220-240VAC 50/60Hz		
🌞	Cree		
🌈	2700K / 3000K / 4000K		
Ra	≥90		
📐	15° / 24° / 36°	15° / 24° / 36° / Random beam angle:15°-36°	
🔌	Remote electronic power supply		
🕒	PHASE/1-10V /DALI as options		
📏	 131 Ø33	 166 Ø45	 257 Ø60
IP20			





HOUSING'S COLOR



	LX-DL-0203A-LED	LX-DL-0207A-LED	LX-DL-0218A-LED	LX-DL-0603A-LED	LX-DL-0607A-LED	LX-DL-0618A-LED
⚡	3W	7W	18W	3W	7W	18W
💡	180 lm	420 lm	1080 lm	180 lm	420 lm	1080 lm
🔌	220-240VAC 50/60Hz					
🌞	Cree					
🌈	2700K / 3000K / 4000K					
Ra	≥90					
🔧	15° / 24° / 36°					
🔧	15° / 24° / 36° / Random beam angle:15°-36°					
🔧	15° / 24° / 36°					
🔧	15° / 24° / 36° / Random beam angle:15°-36°					
🔧	Remote electronic power supply					
🔧	PHASE/1-10V /DALI as options					
📏						
IP20						




HOUSING'S COLOR





	LX-DL-0407A-LED	LX-DL-0514A-LED	LX-DL-0418A-LED	LX-DL-0536A-LED
⚡	7W	14W	18W	36W
💡	420 lm	820 lm	1080 lm	2160 lm
🔌	220-240VAC 50/60Hz			
🌞	Cree			
🌈	2700K / 3000K / 4000K			
Ra	≥90			
🔧	15° / 24° / 36° / Random beam angle:15°-36°			
🔧	Remote electronic power supply			
🔧	PHASE/1-10V /DALI as options			
📏				
IP20				

Optional adapter
 
 Honeycomb Spread Lens

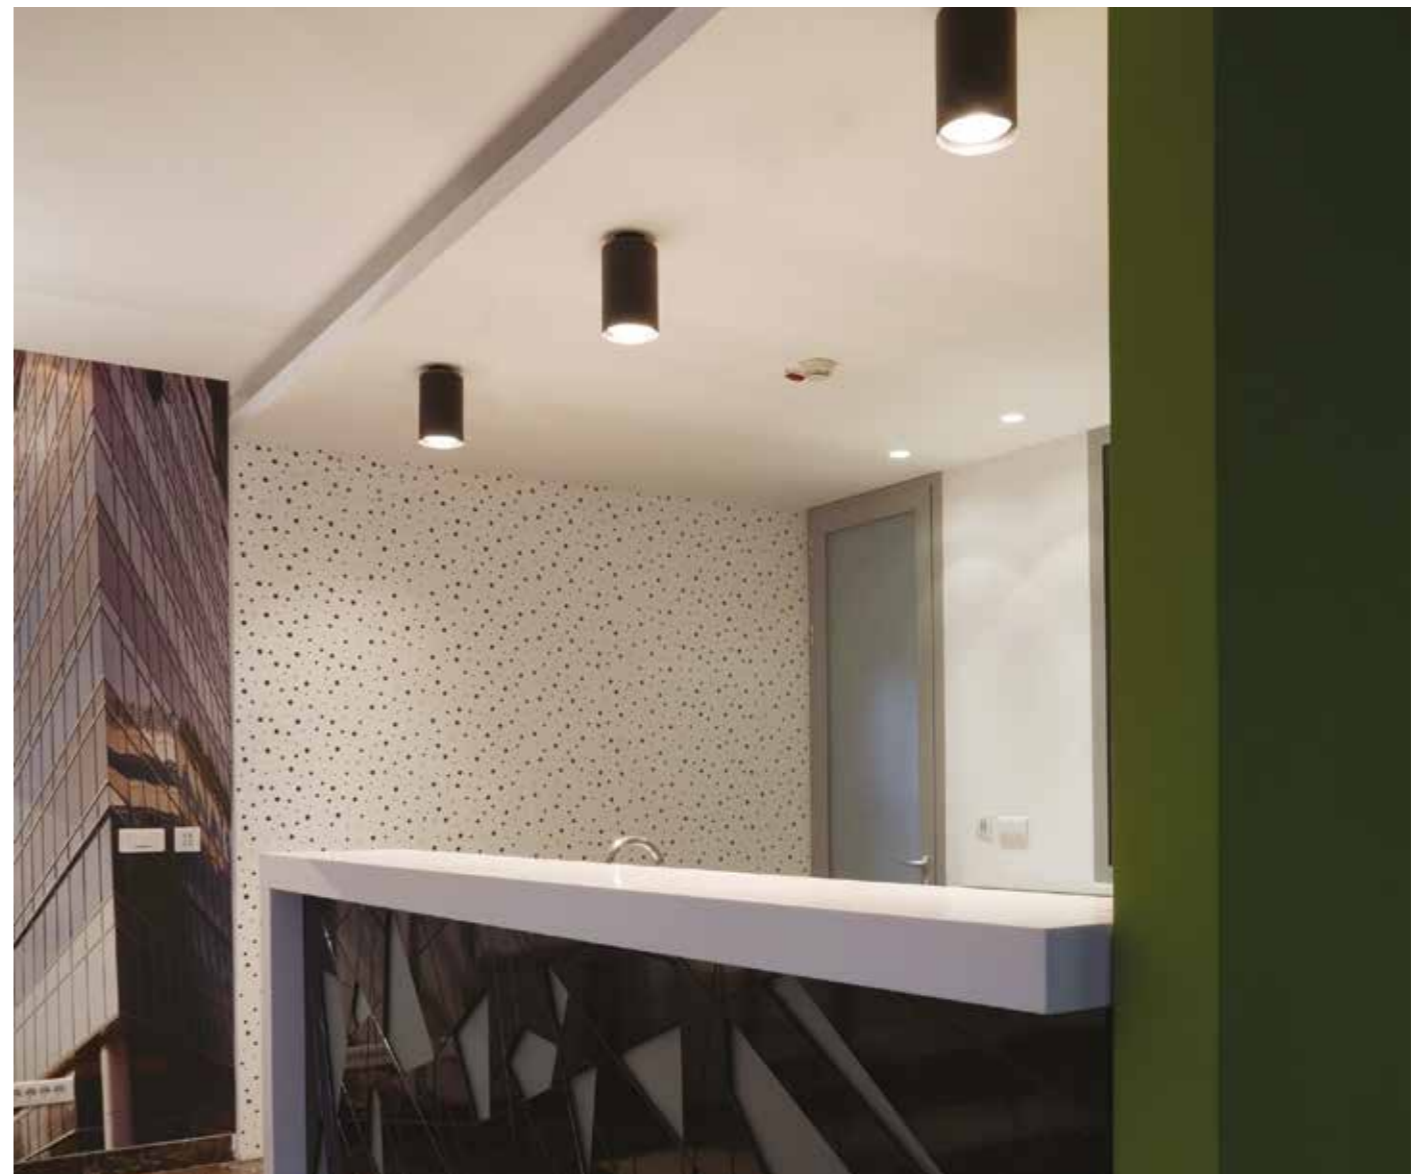









			
LX-DL-0321-LED-10W	LX-DL-0322-LED-10W	LX-DL-0331-LED-21W	LX-DL-0341-LED-28W
10W	10W	21W	28W
220-240VAC 50/60Hz			
440Lm	770Lm	1447Lm	2120Lm
3000K/4000K			
Ra >80			
6°	15°/22°/30°	15°/24°/36°	
			
IP20			



Optional adapter
 
 Honeycomb Spread Lens

					
LX-DL-0421-LED	LX-DL-W0422-LED	LX-DL-0431-LED	LX-DL-W0432-LED	LX-DL-0441-LED	LX-DL-W0442-LED
8W/10W	21W	28W			
220-240VAC 50/60Hz					
8W:629Lm/10W:770Lm		1447Lm	2120Lm		
3000K/4000K					
Ra >90					
6°/10°/15°/22°/30°			15°/24°/36°		
					
IP20					



				
LX-DL-0323-LED	LX-DL-0324-LED	LX-DL-0334-LED-15W	LX-DL-0335-LED-21W	LX-DL-0344-LED-28W
10W	15W	21W	21W	21W
220-240VAC 50/60Hz				
770Lm	1 201Lm	1 447Lm	2 120Lm	2 120Lm
3000K/4000K				
Ra >80				
15°/22°/30°		15°/24°/36°		
				
105	130	115	140	140
Ø52	Ø52	Ø70	Ø70	Ø90
IP20				



				
LX-DL-1731A-LED-15W	LX-DL-0332-LED-15W	LX-DL-0333-LED-15W	LX-DL-0342-LED-21W	LX-DL-2351-LED-21W
15W	15W	15W	21W	21W
220-240VAC 50/60Hz				
1 201Lm	1201Lm	1447Lm	1447Lm	1447Lm
3000K/4000K				
Ra >90				
15°/24°/30°		15°/24°/36°		
				
100	180	180	100	100
Ø100	Ø70	Ø70	Ø95	90
IP54	IP20	IP20	IP54	IP54



TRACK LIGHT DOWNLIGHT



Four line

Three line

Two line

Track Accessories

Options: two line/three line/four line
 Options: 1 Meter/1.5 Meter/2 Meter
 Options color: Black/White


Fitting of two line track Fitting of three line track



Fitting of four line track



Connector

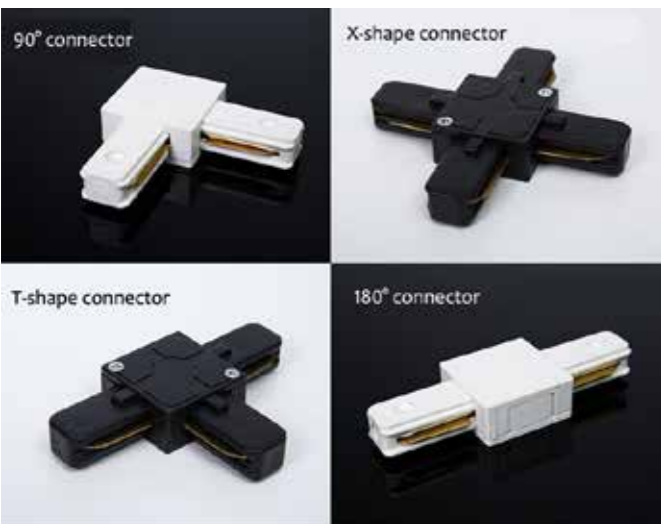










Optional colors






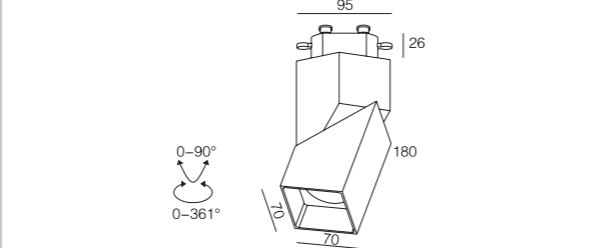
LX-DL-D8051-LED	
	20W / 30W
	1900 Lm / 2500 Lm
	220-240VAC 50/60Hz
	CREE
	3000K
Ra	≥80
	24°
	Remote electronic power supply
	PHASE/1-10V /DALI as options
	G53 MAX 50W - 15W
	IP20








Optional adapter
 
 Honeycomb Spread Lens

			
LX-DL-0221-LED-10W	LX-DL-0222-LED-10W	LX-DL-0231-LED-21W	LX-DL-0241-LED-28W
10W	10W	21W	28W
220-240VAC 50/60Hz			
340Lm	440Lm	545Lm	545Lm
3000K/4000K			
Ra >90			
15°/22°/30°	6°	15°/22°/30°	15°/24°/36°
			
IP20			






Optional adapter
 
 Honeycomb Spread Lens

		
LX-DL-1731-LED-15W	LX-DL-0232-LED-15W	LX-DL-0233-LED-15W
15W	15W	15W
220-240VAC 50/60Hz		
470Lm	545Lm	470Lm
3000K/4000K		
Ra >90		
15°/22°/30°	15°/22°/30°	
		
IP20		

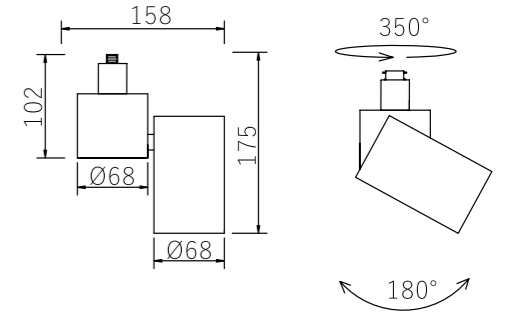





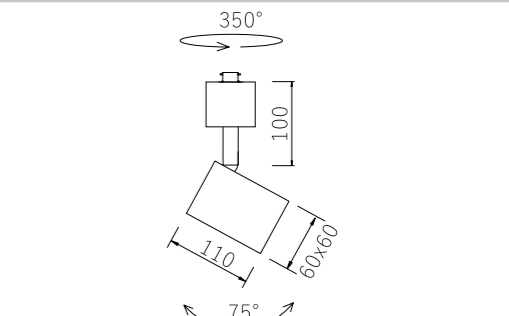



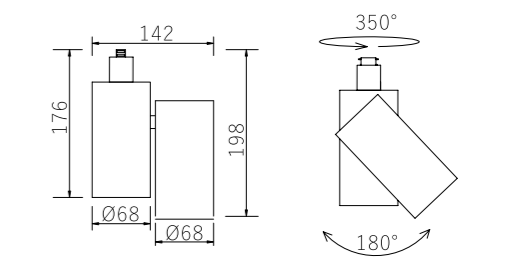




LX-DL-C8011	
	Max 50W / MAX 7W
	GU10 QPAR16 / GU10-LED PAR16
	
	IP20



LX-DL-D8161	
	1xMAX 7W
	GU10-LED PAR16
	
	IP20



LX-DL-C8021-LED	
	15 W
	1290 Lm
	220-240VAC 50/60Hz
	CREE
	3000K
	Ra ≥80
	24°
	Remote electronic power supply
	PHASE/1-10V /DALI as options
	
	IP20

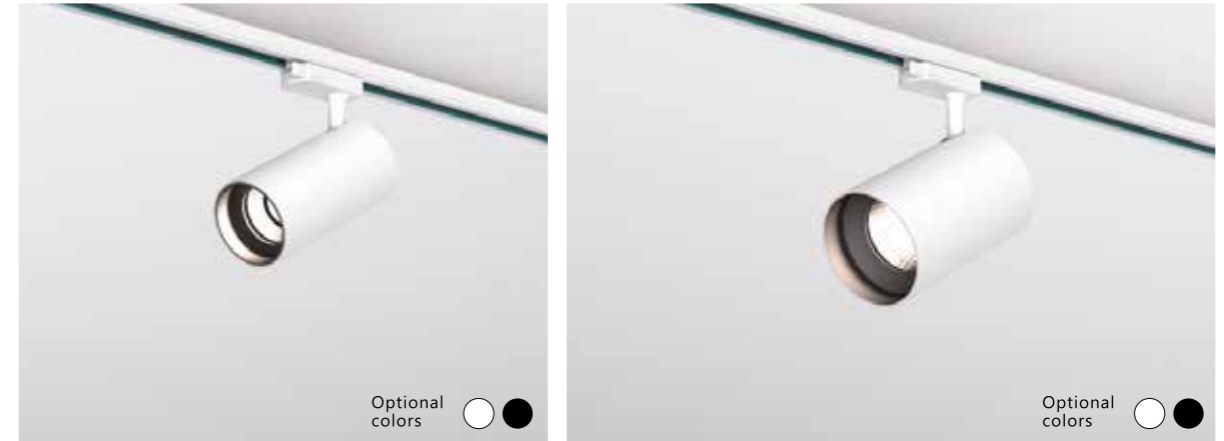

LX-DL-D8081	
⚡	Max 50W / MAX 7W
💡	GU10 QPAR16 / GU10-LED PAR16
📏	
🛡️	IP20

	LX-DL-D8111-LED	LX-DL-D812120-LED	LX-DL-D812130-LED
⚡	15 W	20 W	30 W
💡	1290 Lm	1900 Lm	2500 Lm
🔌	220-240VAC 50/60Hz		
💡	CREE		
🌈	3000K		
Ra	≥80		
📐	24°		
🔌	Remote electronic power supply		
📺	PHASE/1-10V /DALI as options		
📏			
🛡️	IP20		


LX-DL-C8351-LED	
⚡	9W / 15W / 20W
💡	9W:730Lm / 15W:1290Lm / 20W:1900Lm
🔌	220-240VAC 50/60Hz
💡	Cree
🌈	3000K
Ra	≥80
📐	24°
🔌	Remote electronic power supply
📺	PHASE/1-10V /DALI as options
🚫	GU10 MAX 50 / MR16 MAX 7W
📏	
🛡️	IP20



LX-DL-C8341-LED	
⚡	15W / 20W / 30W / 37W / 42W
💡	15W:1290Lm / 20W:1900Lm / 30W:2500Lm / 37W:3500Lm / 42W:4000Lm
🔌	220-240VAC 50/60Hz
💡	Cree
🌈	3000K
Ra	≥80
📐	24°
🔌	Remote electronic power supply
📺	PHASE/1-10V /DALI as options
🚫	GU10 MAX 50 / MR16 MAX 7W
📏	
🛡️	IP20




LX-DL-C8321-LED	
⚡	20W / 30W / 42W / 58W
💡	20W:1900Lm / 30W:2500Lm / 42W:4000Lm / 58W:4080Lm
🔌	220-240VAC 50/60Hz
💡	Cree
🌈	3000K
Ra	≥80
📐	40°
🔌	Remote electronic power supply
📺	PHASE/1-10V /DALI as options
📏	
🛡️	IP20

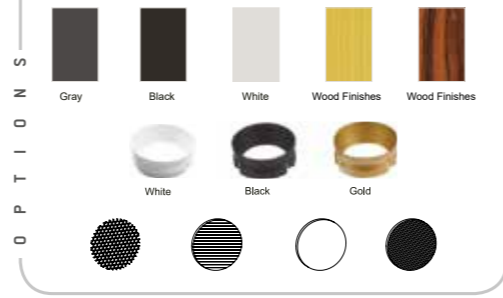

Optional colors

	LX-DL-EM79-LED	LX-DL-EM712-LED	LX-DL-EE718-LED	LX-DL-EE728-LED
⚡	9 W	12 W	18 W	28 W
💡	945 Lm	1656 Lm	2395 Lm	3810 Lm
⚡	220-240VAC 50/60Hz			
💡	BRIDGELUX			
🌈	3000K			
Ra	≥80			
📐	21° / 32° / 48°	25° / 35° / 52°	16° / 32° / 50°	
🔌	Remote electronic power supply			
📷	PHASE/1-10V /DALI as options			
📏				
IP20				

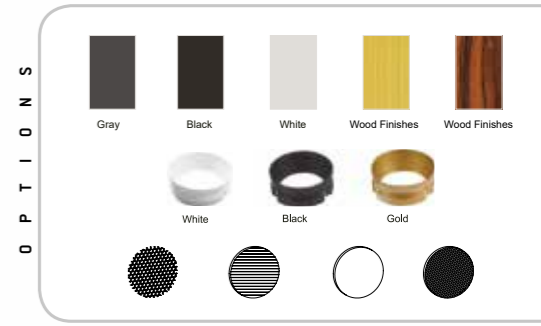

Optional colors

	LX-DL-EME79-LED	LX-DL-EME712-LED	LX-DL-EE2718-LED	LX-DL-EE2728-LED
⚡	9 W	12 W	18 W	28 W
💡	945 Lm	1656 Lm	2395 Lm	3810 Lm
⚡	220-240VAC 50/60Hz			
💡	BRIDGELUX			
🌈	3000K			
Ra	≥80			
📐	21° / 32° / 48°	25° / 35° / 52°	16° / 32° / 50°	
🔌	Remote electronic power supply			
📷	PHASE/1-10V /DALI as options			
📏				
IP20				

MAGNETIC TRACK LIGHT






LX-DL-2011-LED-10W	LX-DL-2012-LED-10W	LX-DL-2026-LED-12W	LX-DL-2029-LED-24W
10W	10W	12W	24W
900 lm		1 080 lm	2 160 lm
220-240VAC 50/60Hz			
3000K/4000K			
>80			
15°/30°/45°			

LX-DL-2014-LED-10W	LX-DL-2015-LED-10W	LX-DL-2016-LED-10W	LX-DL-2017-LED-10W

	10W			
	900 lm			
	220-240VAC 50/60Hz			
	3000K/4000K			
	>80			
	15°/22°/30°		15°/30°/45°	
	IP20			

			
	LX-DL-2018-LED-10W	LX-DL-2013-LED-10W	LX-DL-2019-LED-10W
⚡	10W	10W	10W
U _q	220-240VAC 50/60Hz		
☀	770Lm		
🌈	3000K/4000K		
Ra	>80		
📐	15°/30°/45°	15°/22°/30°	
↔			
IP20			



OVNI DOWNLIGHT






⚡	4,5 W		
U ₀	220-240VAC 50/60Hz		
☀	560Lm		
🌈	2700K/4000K		
Ra	>82/>92/>97		
☀	36°/60°	Rotatable 240° / Swivelling 60°	36°/60°
📏			
IP20			










There are three different designs of plaster modules. The ceiling bulges either in or out, becoming a sculptural element of its own.

	167200	167300	137500	137600	167800
	7.0Kg	7.0Kg	1.0Kg		7.0Kg
	Ø28mm	Ø28mm	Ø1mm	Ø8mm	Ø28mm
	IP20				

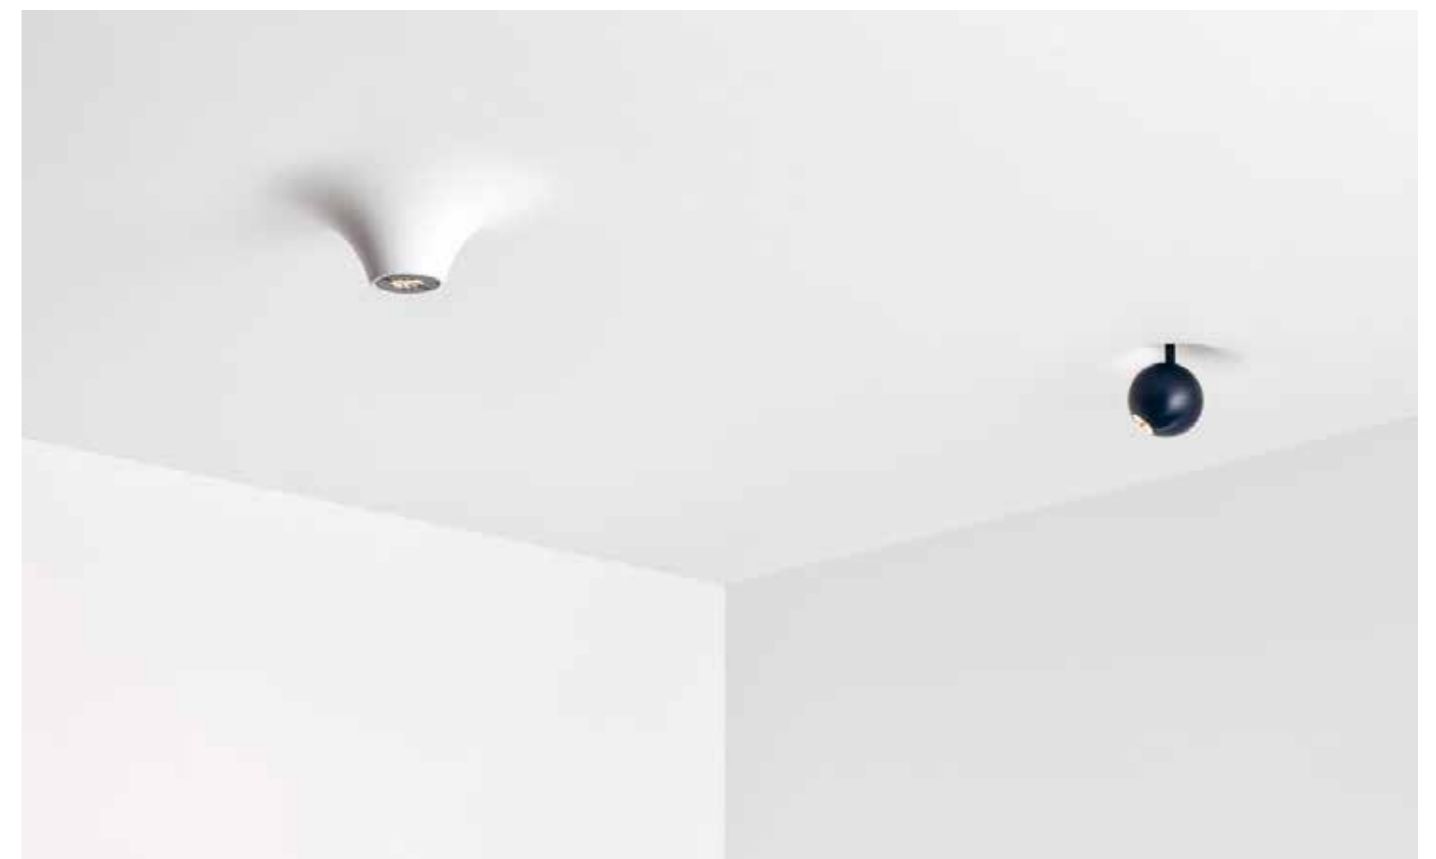



	LX-WL-16110-S-2W	LX-WL-16120-M	LX-WL-16130-L
⚡	2W	GU10 - MAX 35W	
U _q	220-240VAC 50/60Hz		
🌈	3000K/4000K	2700K	
Ra	>90	>92	
↔			
IP20			

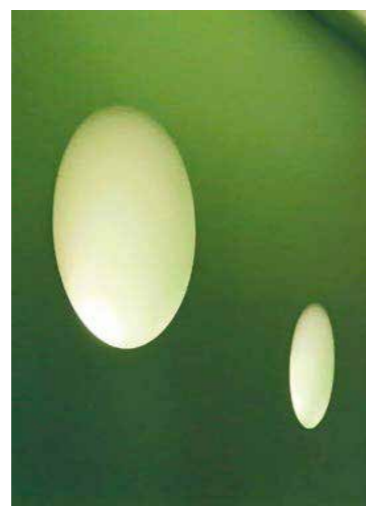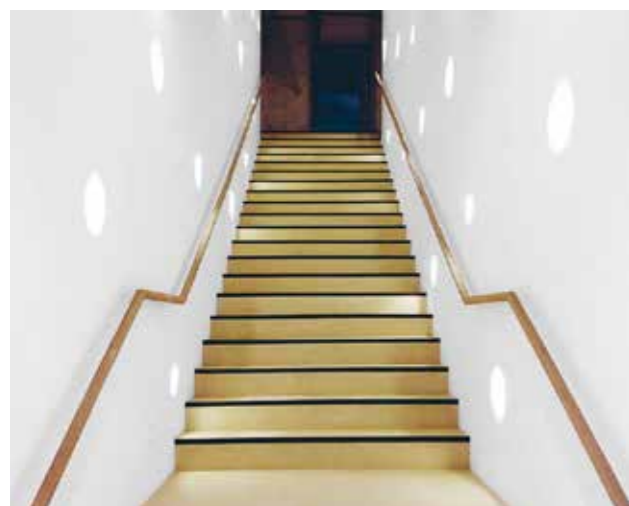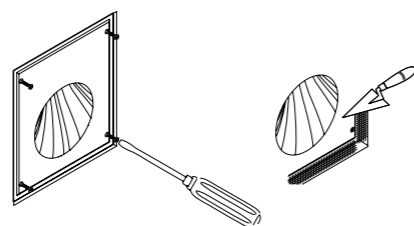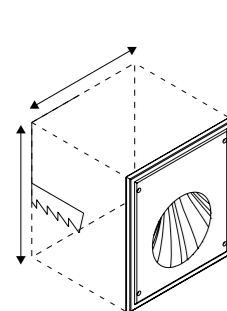


WALL LIGHT



IP20

	LX-WL-W10-11W
⚡	11W
↔	L 192*180*49mm
⚡	AC 110/240V
💡	490Lm
🌈	3000K/4000K/6000K
Ra	>80

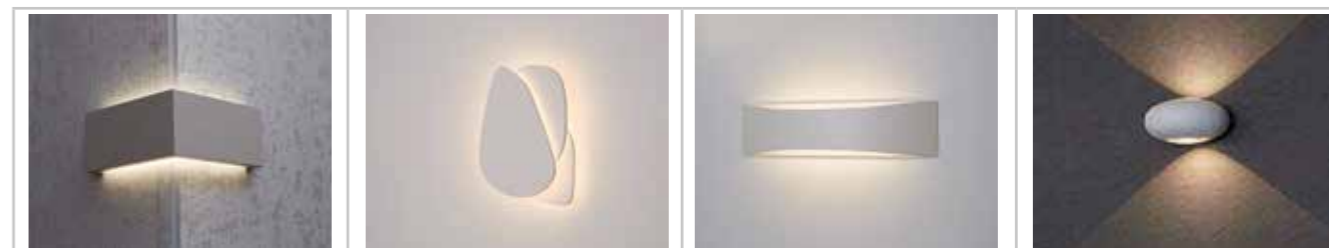

	LX-WL-7601-6W	LX-WL-6501-8W	LX-WL-6001-10W	LX-WL-6701-2x3W
⚡	6W	8W	10W	2x3W
⚡	AC220-240V			
💡	540 lm	720 lm	900 lm	2x270 lm
🌈	3000K/4000K			
Ra	>90			
↔				
IP54				



	LX-WL-5320-10W	LX-WL-5201-8W	LX-WL-5202-10W	LX-WL-5501-3W
⚡	10W	8W	10W	3W
⚡	AC220-240V			
💡	900 lm	720 lm	900 lm	270 lm
🌈	3000K/4000K			
Ra	>80			
↔				
IP54	IP20	IP20	IP54	



LX-WL-4501-4W LX-WL-4801-8W LX-WL-4802-9W LX-WL-4803-10W LX-WL-4901-8W

⚡	4W	8W	9W	10W	8W
U _q	AC220-240V				
☀	360 lm	720 lm	810 lm	900 lm	720 lm
🌈	3000K/4000K				
Ra	>80				
↔					
IP54					



LX-WL-5601-6W LX-WL-5602-6W LX-WL-6201-6W LX-WL-6801-5W

⚡	6W	5W
U _q	AC220-240V	
☀	540 lm	510 lm
🌈	3000K/4000K	
Ra	>90	
↔		
IP54		



LX-WL-7101-6W LX-WL-7301-4W LX-WL-7302-7W LX-WL-7303-7W

⚡	6W	4W	7W
U _q	AC220-240V		
☀	540 lm	360 lm	630 lm
🌈	3000K/4000K		
Ra	>90		
↔			
IP54			



LX-WL-7401 LX-WL-7403-9W LX-WL-7404-9W LX-WL-7405-9W

⚡	4W	9W		
U ₀	AC220-240V			
☀	360 lm	810 lm		
🌈	3000K/4000K			
Ra	>90			
IP54				



LX-WL-7001-3.5W LX-WL-7002-7W LX-WL-7003-7W


⚡	3.5W	7W	
U ₀	AC220-240V		
☀	315 lm	630 lm	
🌈	3000K/4000K		
Ra	>90		
IP54			



LX-WL-7502

⚡	4W	8W	12W
U ₀	AC220-240V		
☀	360 lm	720 lm	1080 lm
🌈	3000K/4000K		
Ra	>90		
IP54			




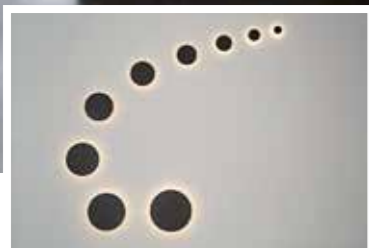

LX-WL-5008									
⚡	4W	6W	8W	10W	12W	14W	16W	18W	20W
U _a	AC220-240V								
☀	360 lm	540 lm	720 lm	900 lm	1080 lm	1260 lm	1440 lm	1620 lm	1800 lm
🌈	3000K/4000K								
Ra	>90								
↔									
IP54									

LX-WL-1711-9W		LX-WL-0611-100W	
⚡	9W	100W	
U _a	AC220-240V		
☀	810 lm	3860 lm	
🌈	3000K/4000K		
Ra	>80		
↔			
	IP20		IP54



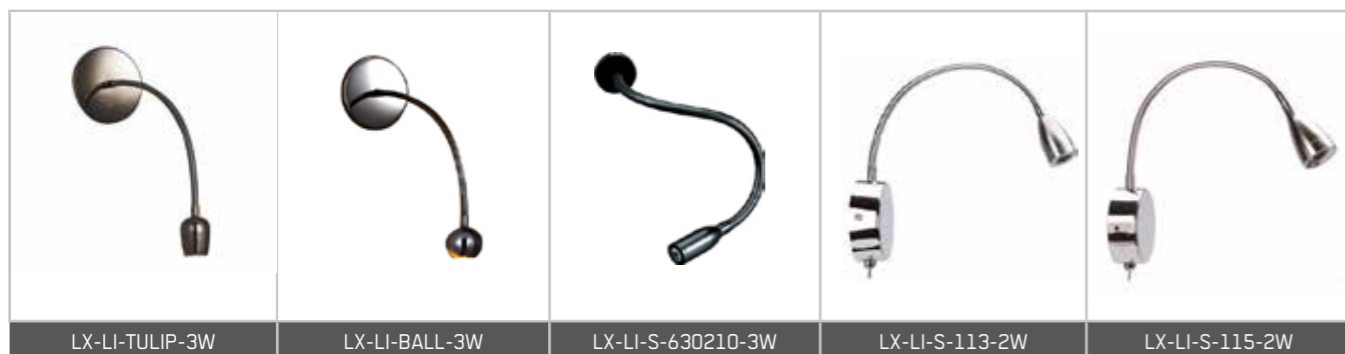









⚡	3W		2W		
U _o	AC 220-240 V				
☀	90Lm/W	160Lm	150Lm		
🌈	3000K/4000K/6000K				
Ra	>80				
IP20					




⚡	4W	3W	3W
U _o	AC 220-240 V		
☀	300Lm	90Lm/W	160Lm
🌈	3000K/4000K/6000K		
Ra	>80		
IP20			




			
LX-LI-S-620310	LX-LI-S-620303	LX-LI-S-620304	LX-LI-S-610101
3W	1.2W		3W
AC 100-240 V			
160Lm	100Lm		160Lm
3000K/4000K/6000K			
Ra >80			
			
IP20			

				
LX-WL-UNIT	LX-WL-ACME	LX-WL-FORMAT	LX-WL-268	LX-WL-2680
2W	2W	2W	E27 Max 40 W	
AC 220-240 V				
90Lm/W				
3000K/4000K/6000K				
Ra >80				
				
IP20				






INSTALLATION

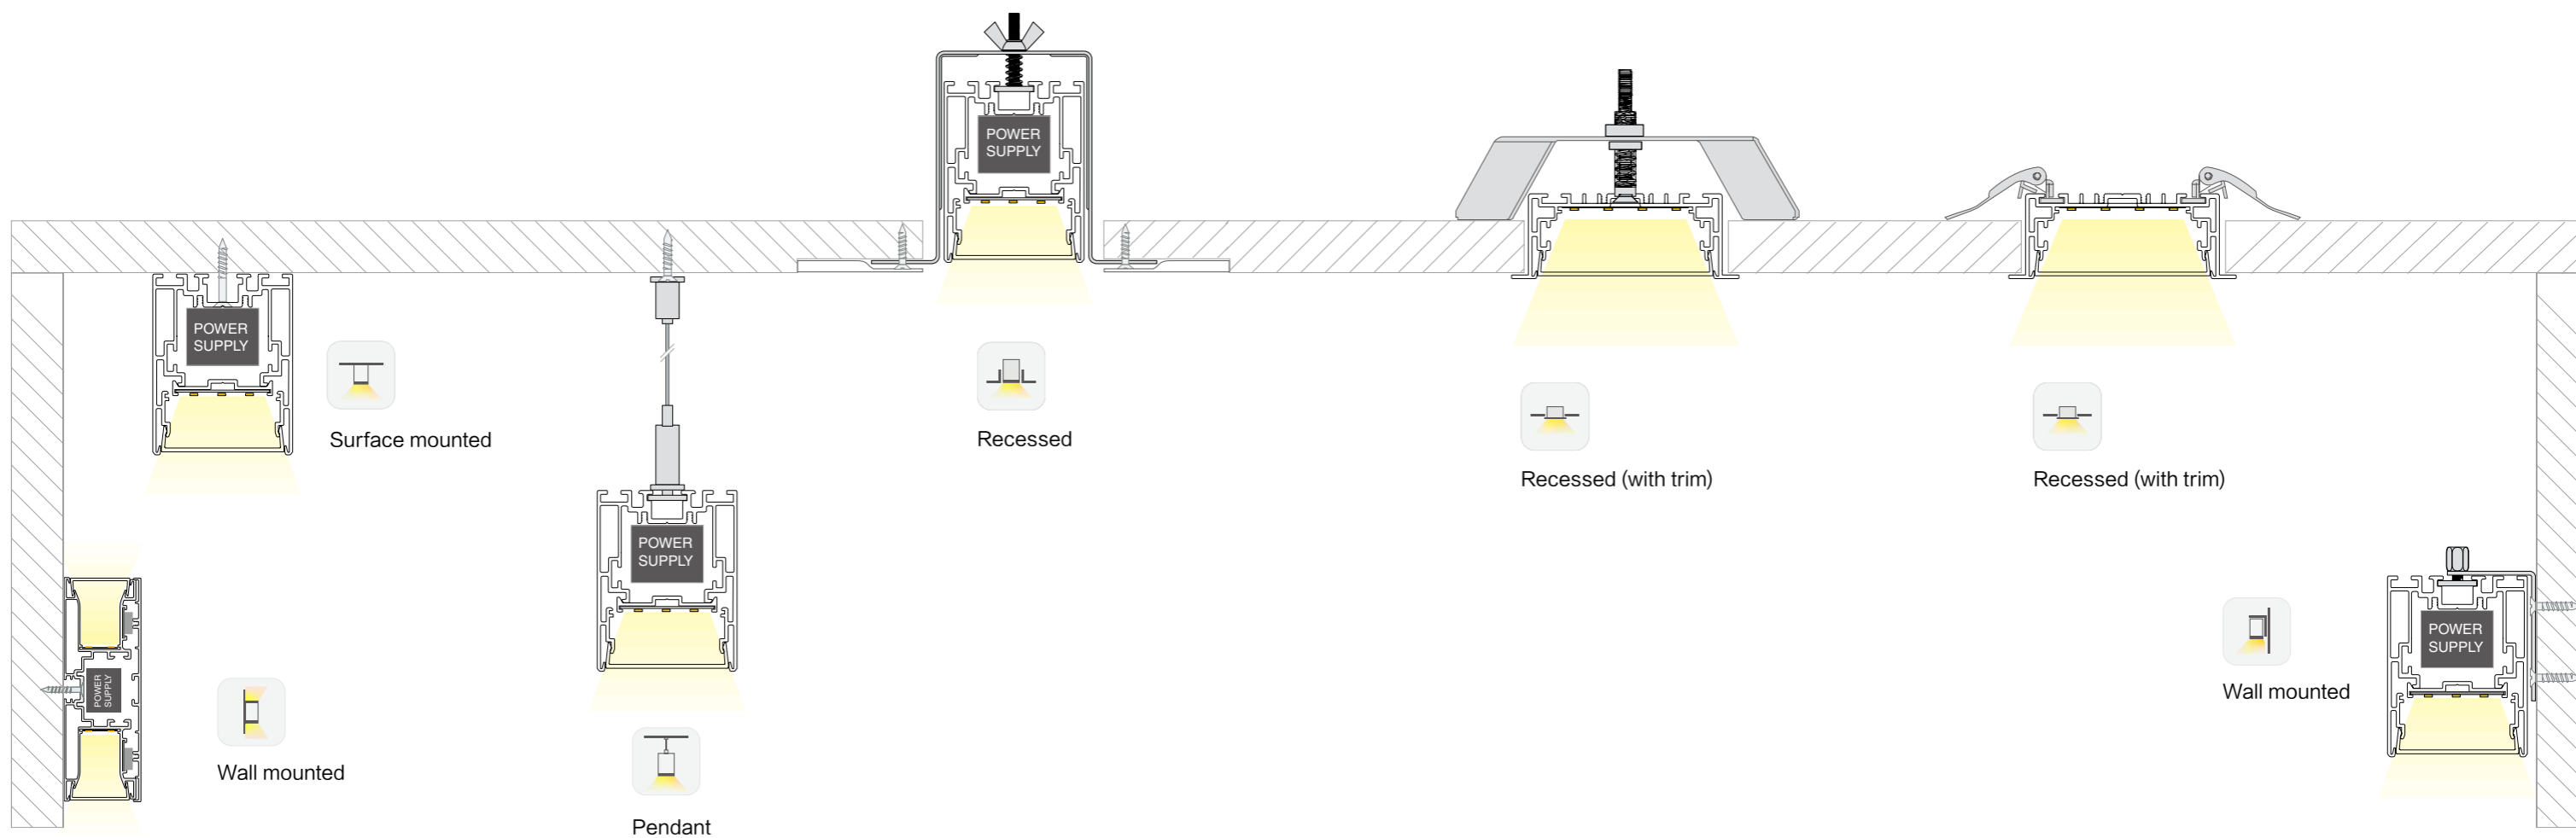


Profile lighting installation

LIGHT SOURCE


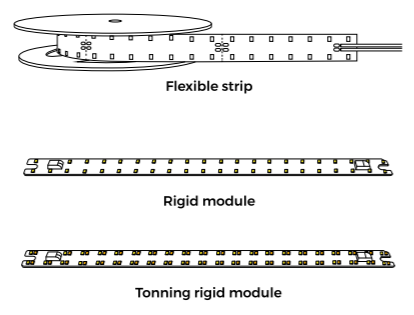


TRIDONIC PHILIPS OSRAM


INSTALLATION

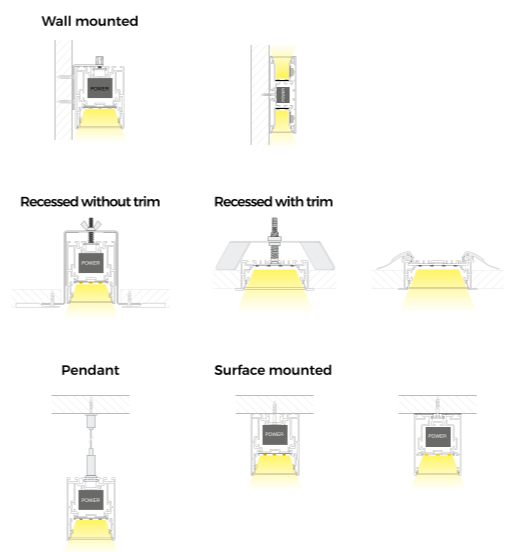


INTEGRATED TRACK CABLING

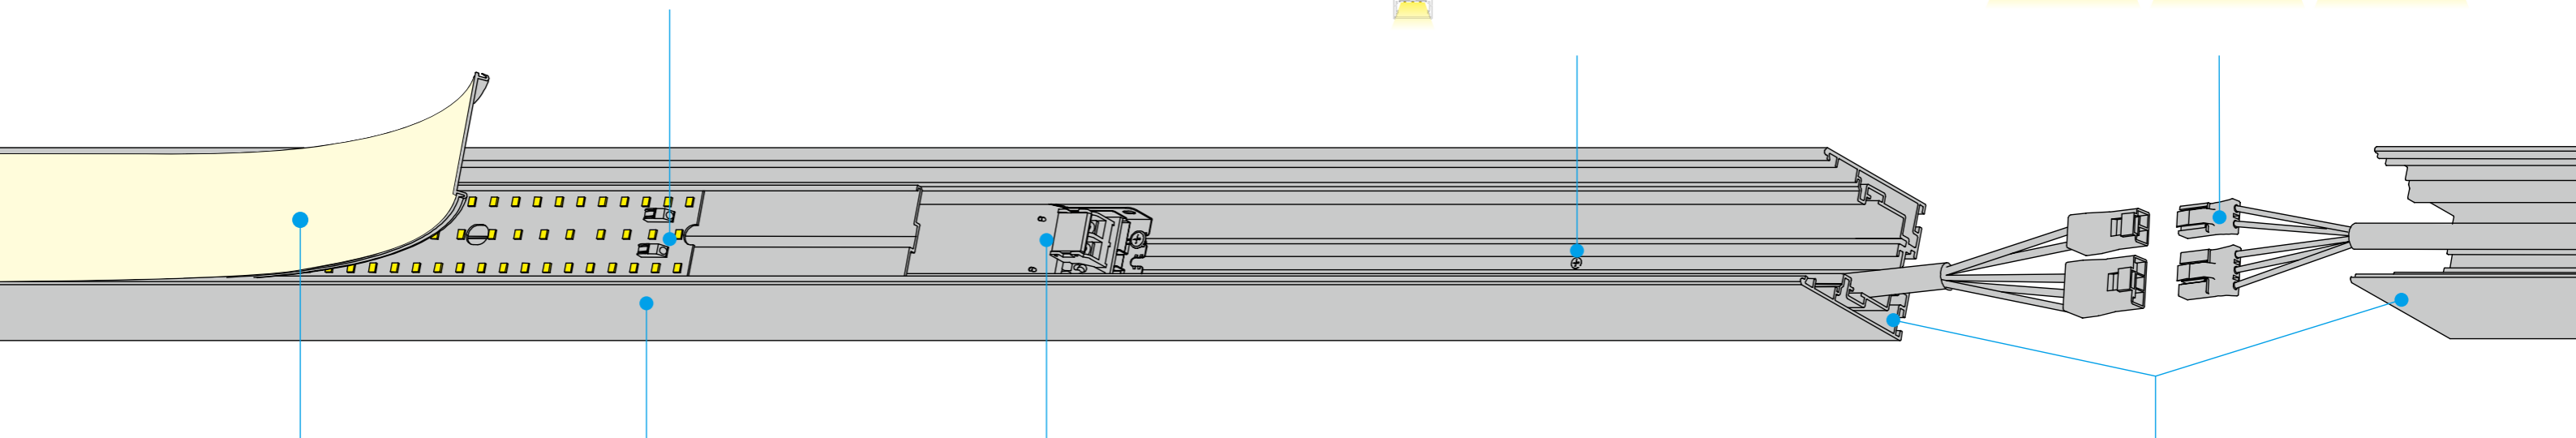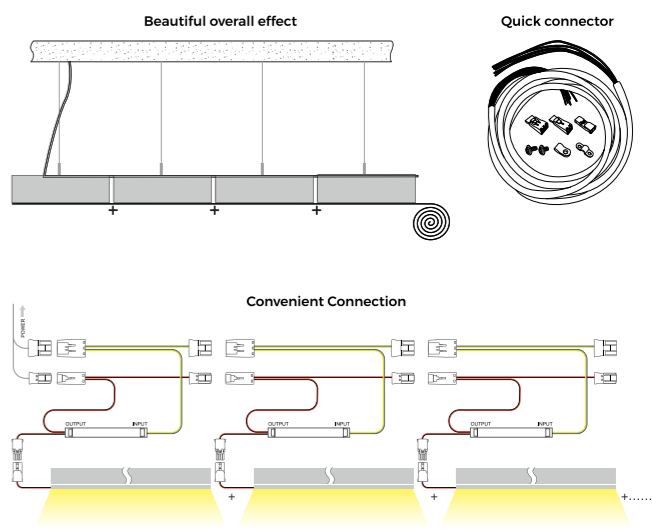

DIFFUSER

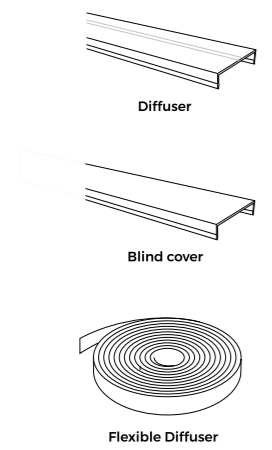

PROFILE





POWER SUPPLY




TRIDONIC PHILIPS OSRAM

CONNECTION

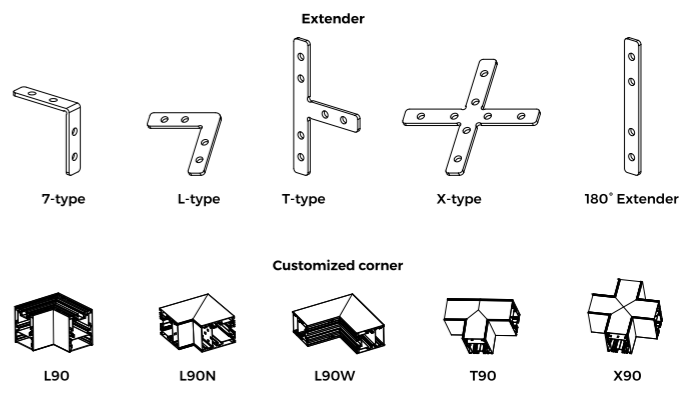


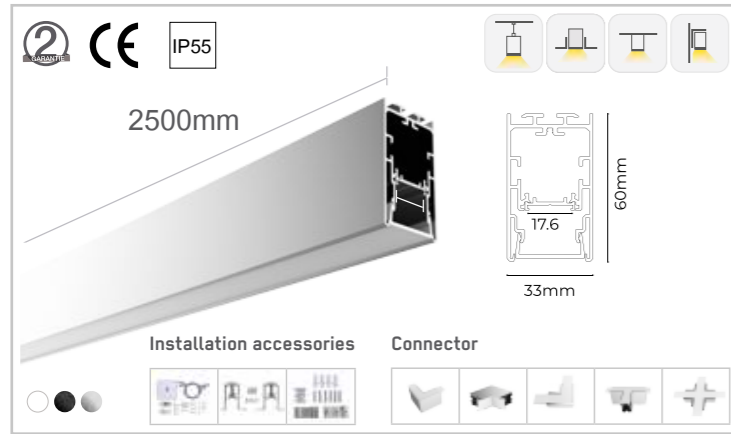


LX-PL-LS3360-20W	
⚡	20W
⚡	24V
☀️	2290 Lm / 2700 Lm
🌈	2300K/2700K/3000K/4000K/5000K/6000K
Ra	>80 / >95
📐	109.90°

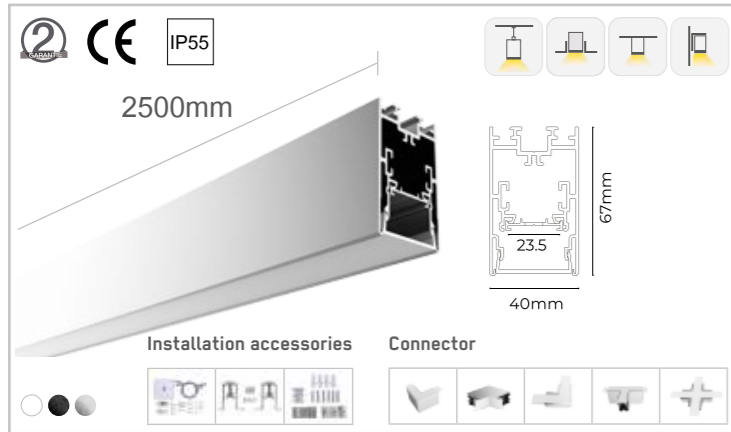









LX-PL-LS4067-20W	
⚡	20W
⚡	24V
☀️	2290 Lm / 2700 Lm
🌈	2300K/2700K/3000K/4000K/5000K/6000K
Ra	>80 / >95
📐	109.98°

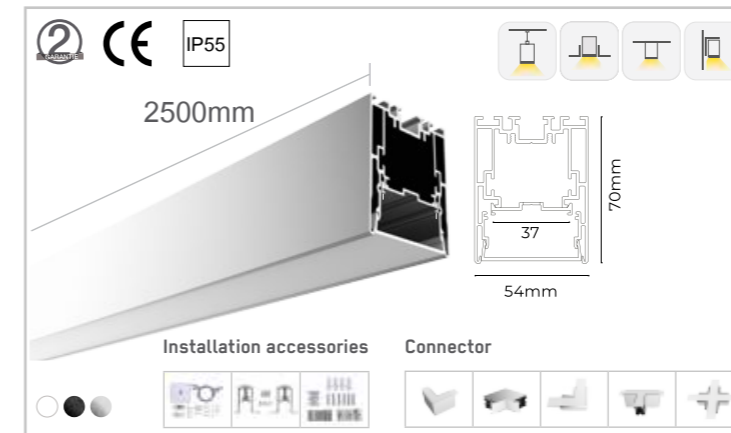



LX-PL-LS5470-25W	
⚡	25W
⚡	24V
☀️	2760 Lm / 3250 Lm
🌈	2300K/2700K/3000K/4000K/5000K/6000K
Ra	>80 / >95
📐	104.30°

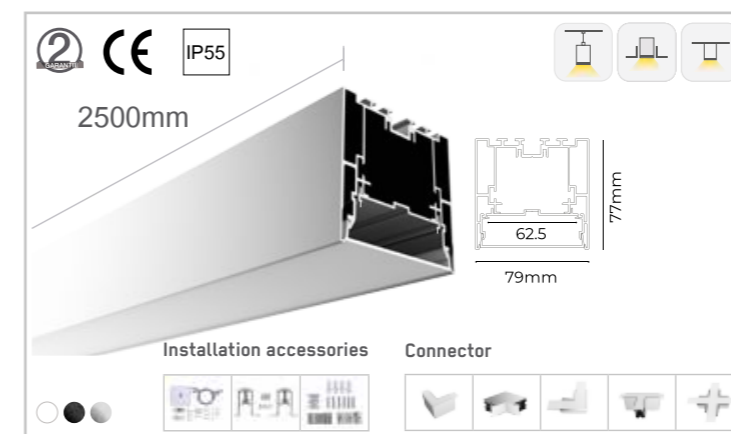


LX-PL-LS7977-30W	
⚡	30W
⚡	24V
☀️	3310 Lm / 3900 Lm
🌈	2300K/2700K/3000K/4000K/5000K/6000K
Ra	>80 / >95
📐	111.64°

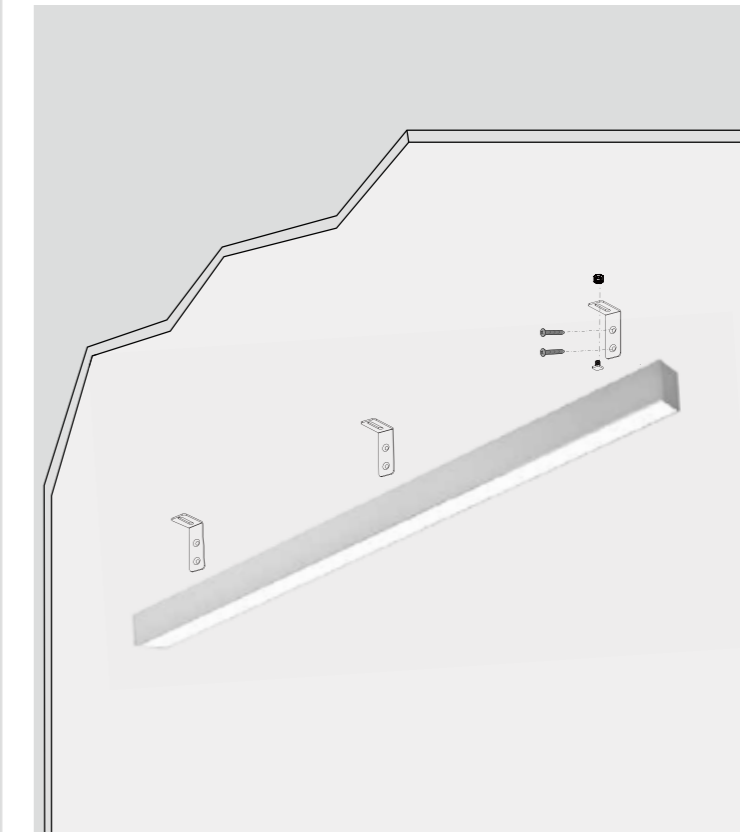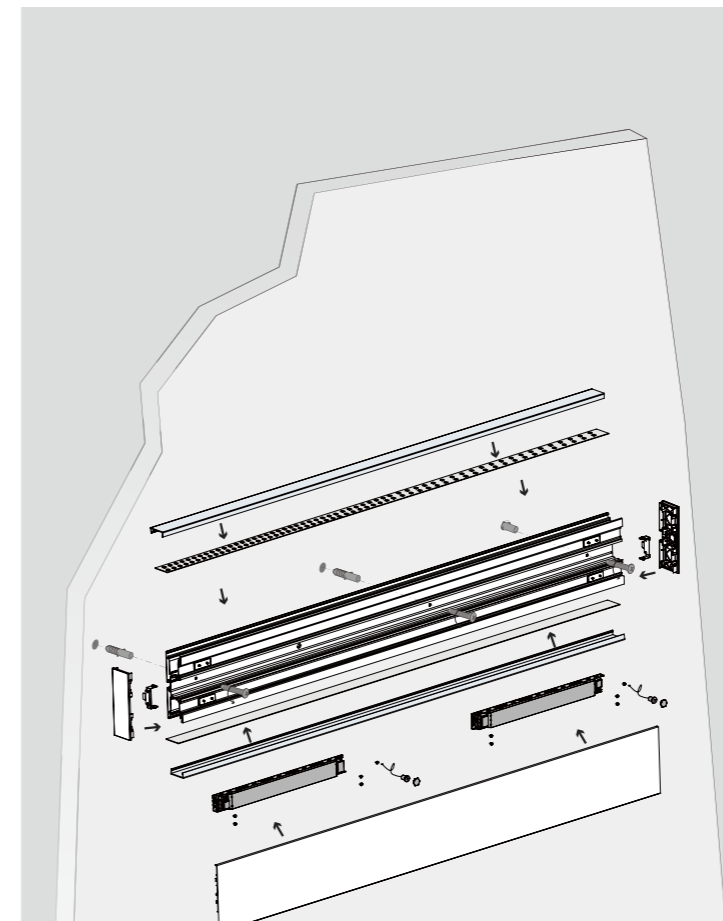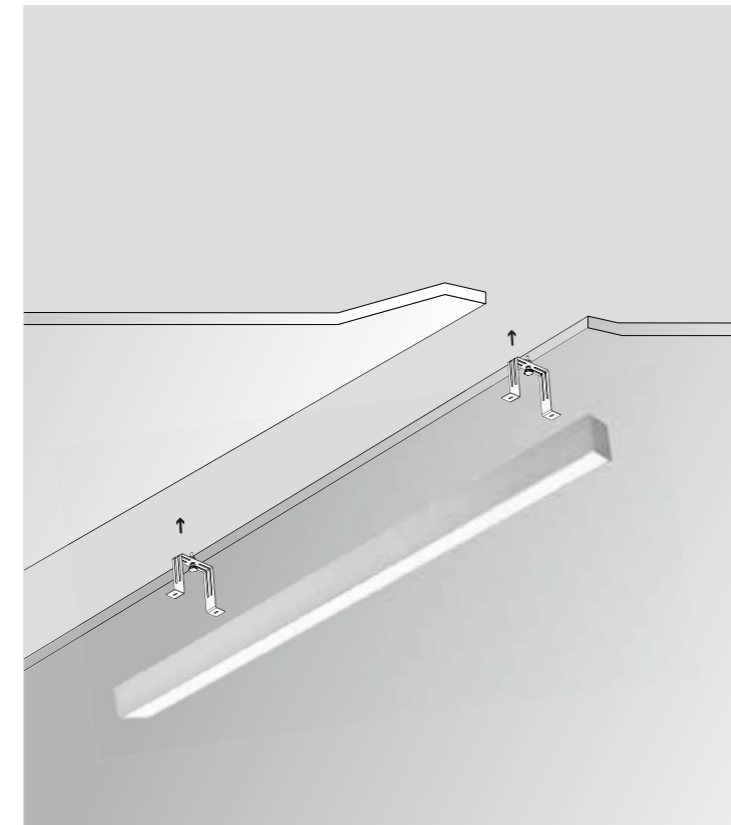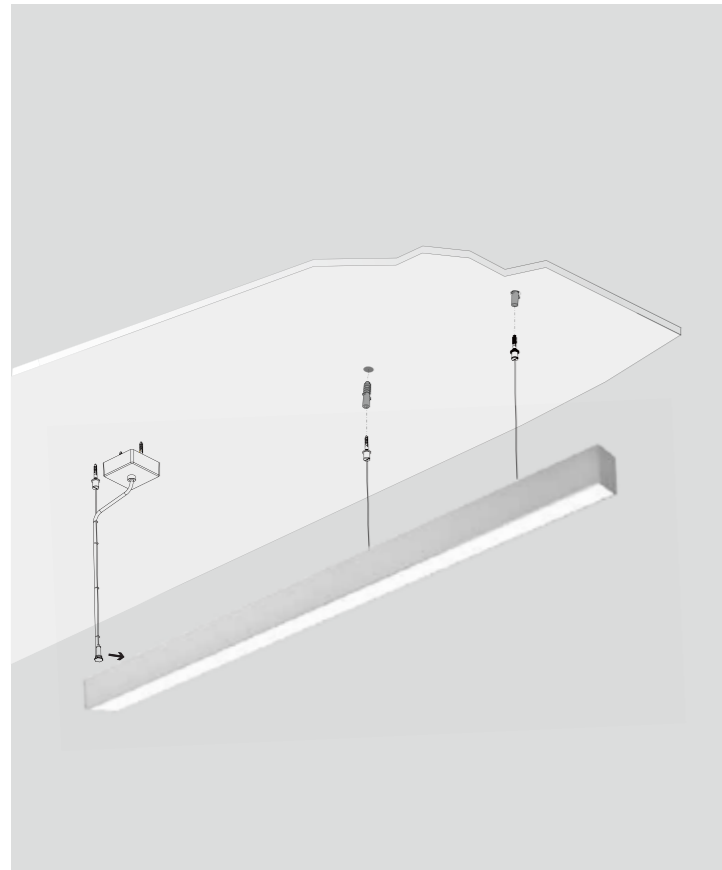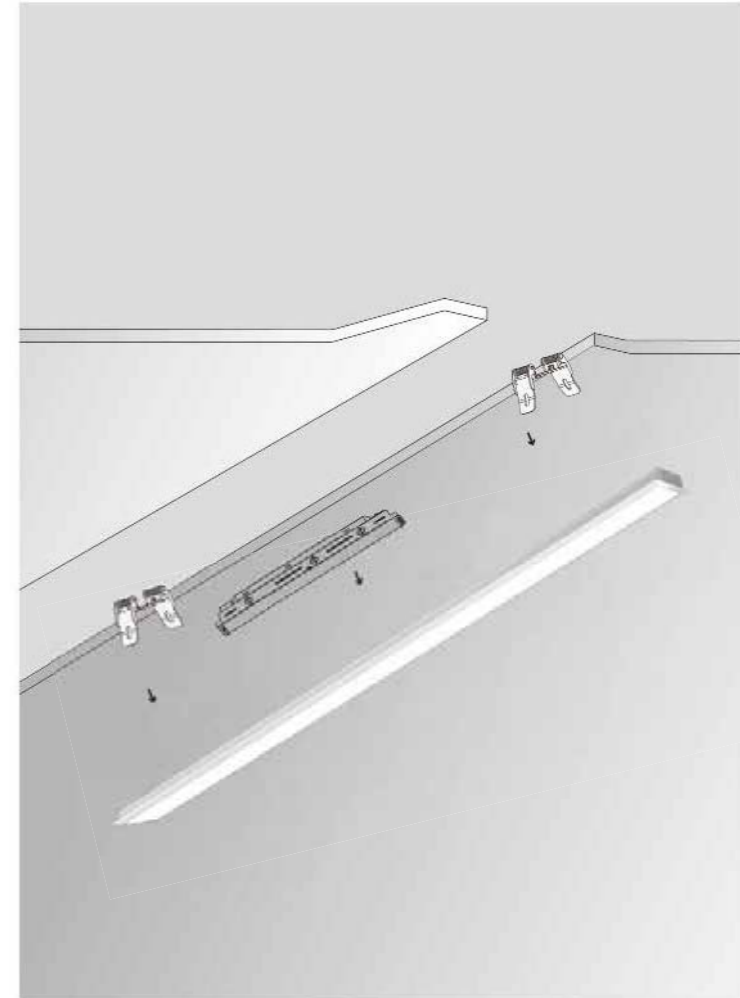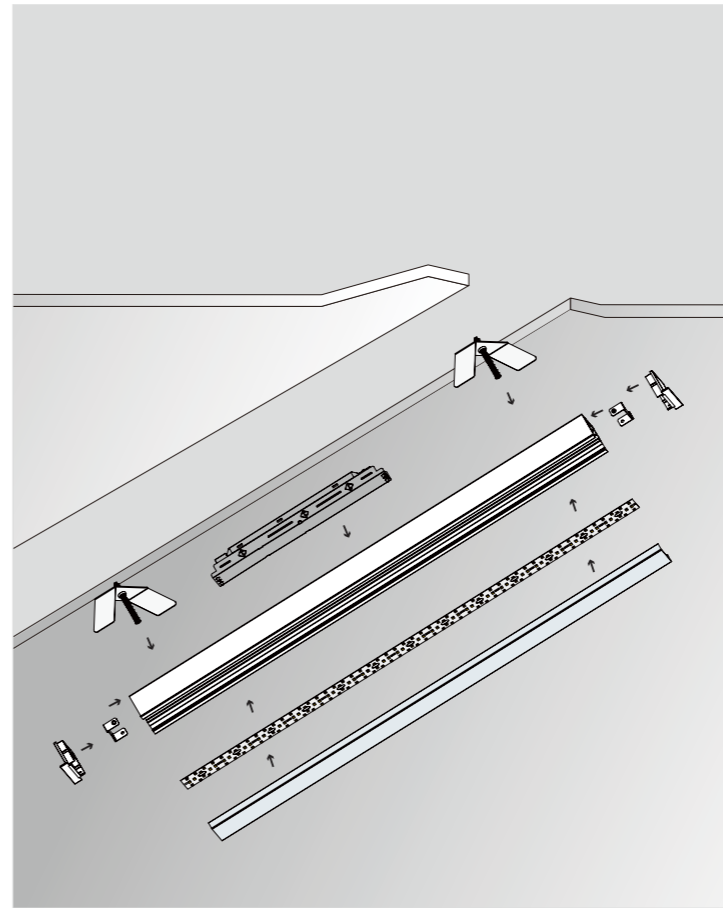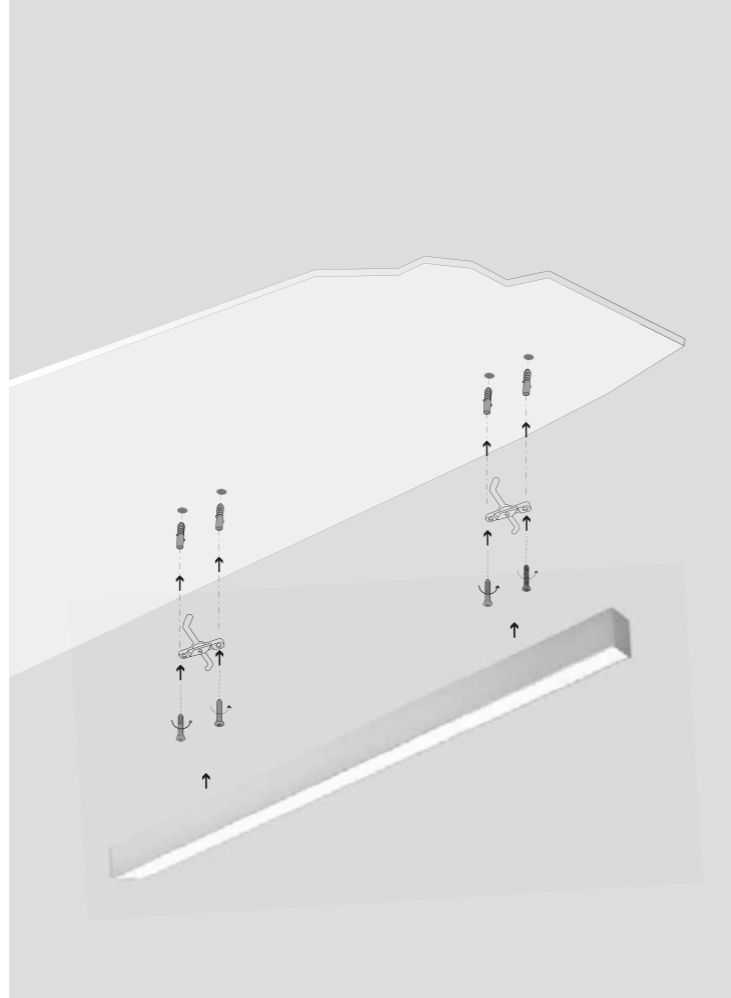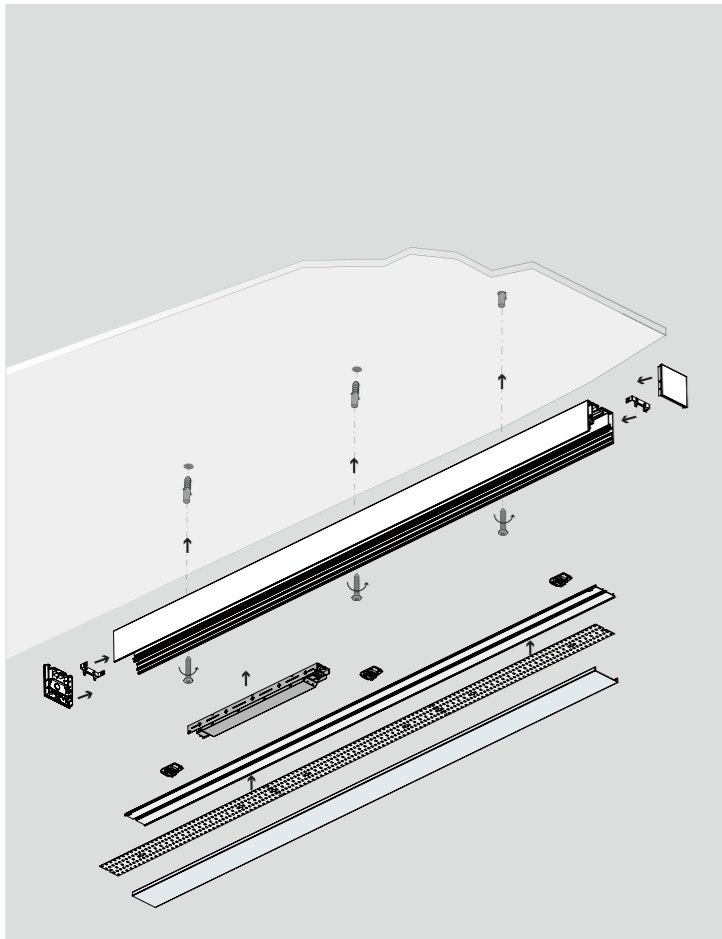


Interconnection installation

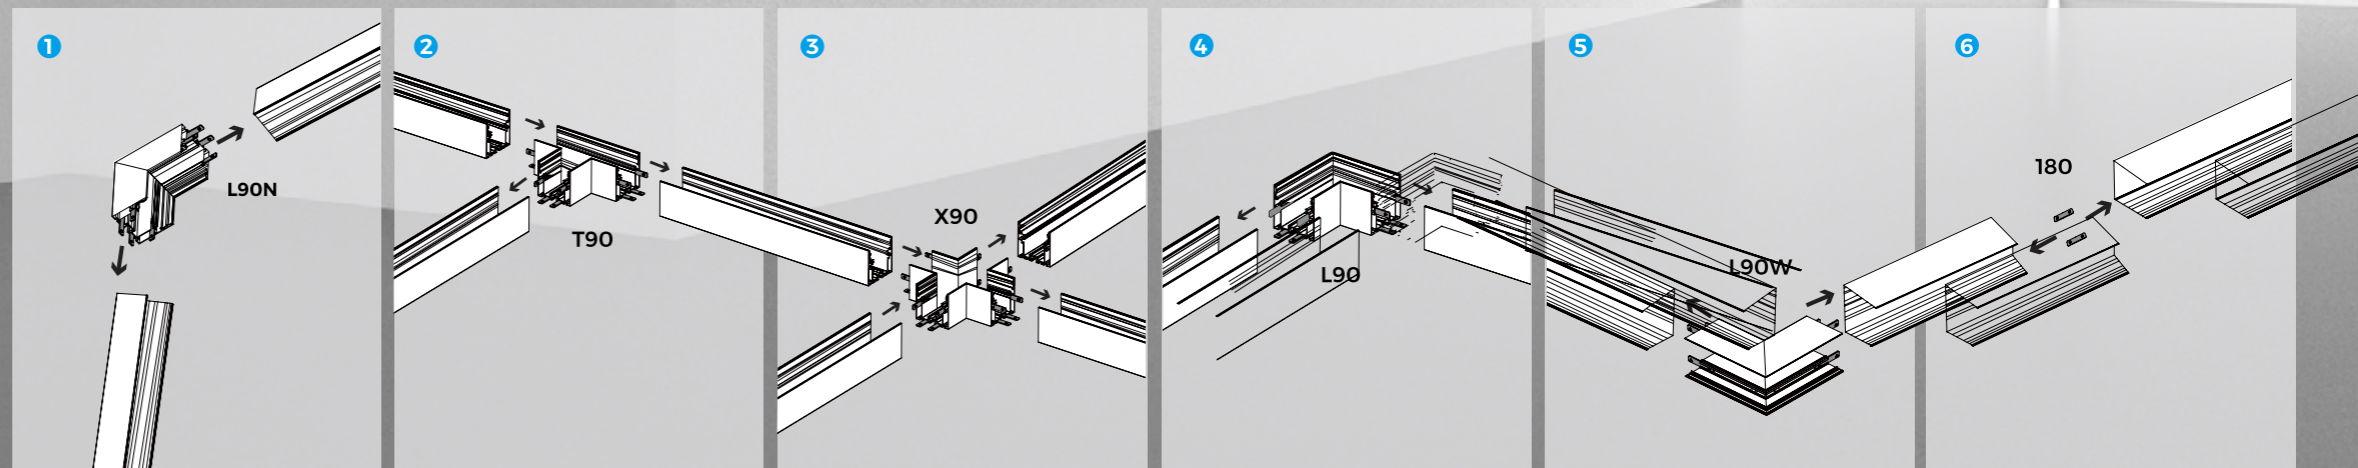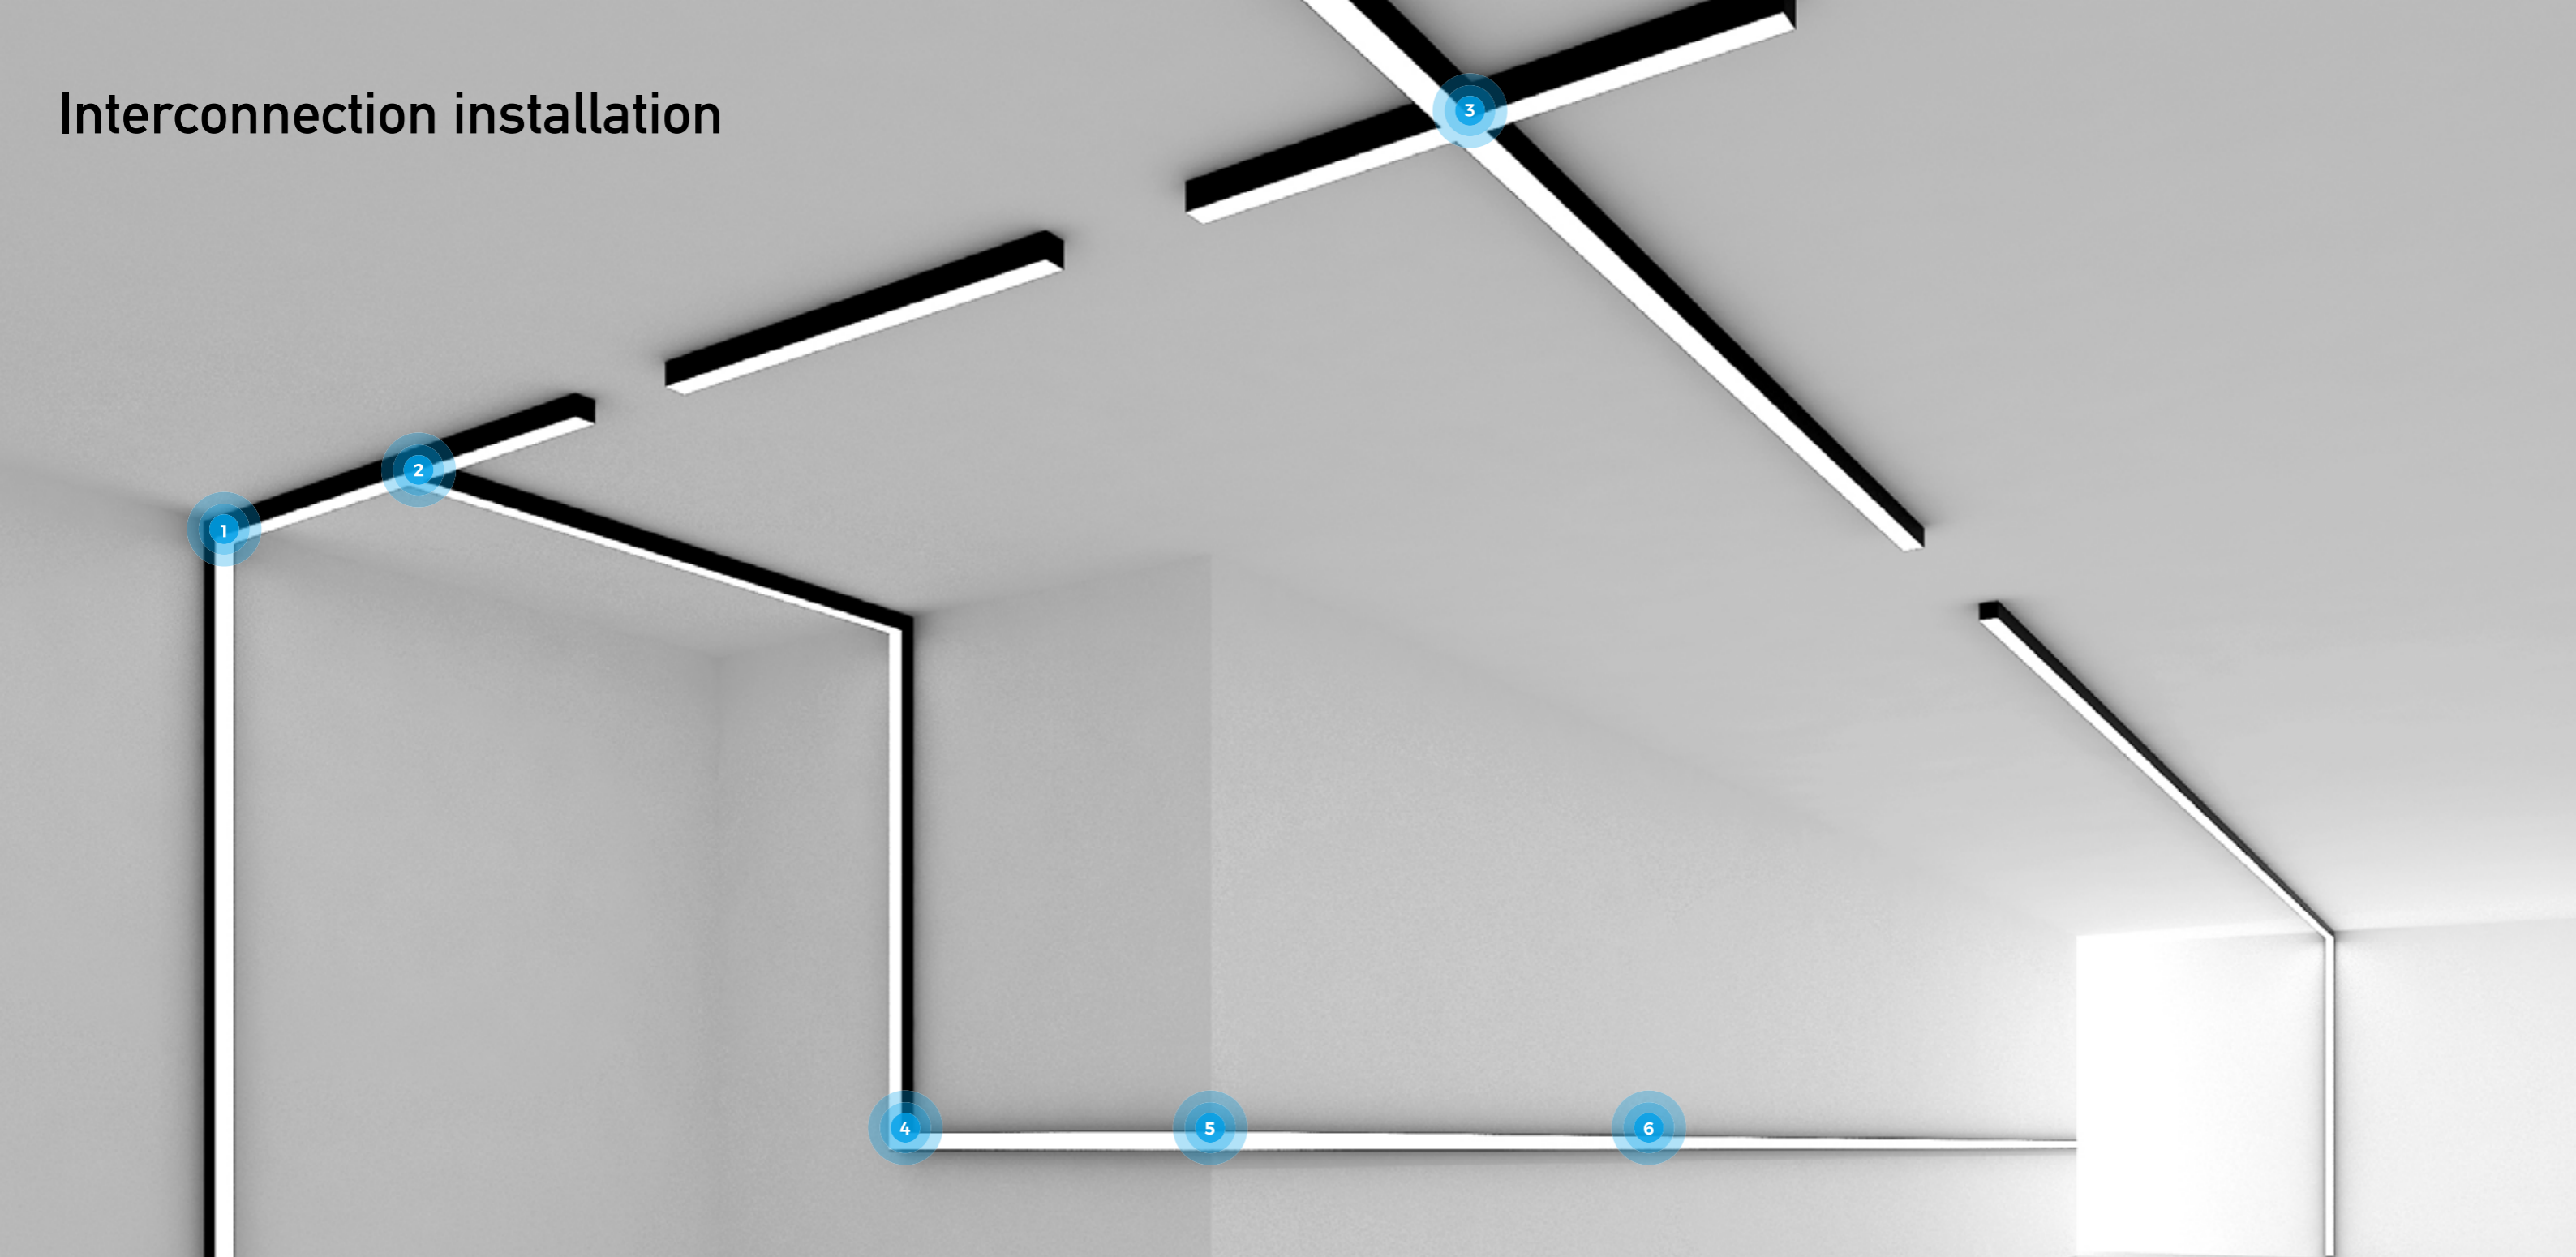


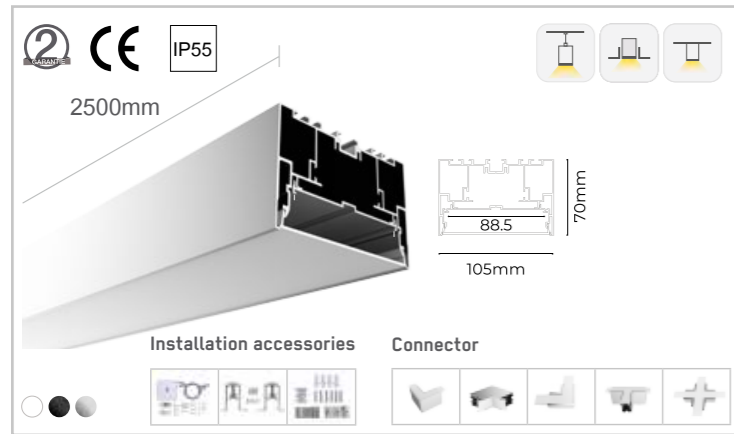

LX-PL-LS10570-40W	
⚡	40W
⚡	24V
💡	4290 Lm / 5050 Lm
🌈	2300K/2700K/3000K/4000K/5000K/6000K
Ra	>80 / >95
📐	111.90°

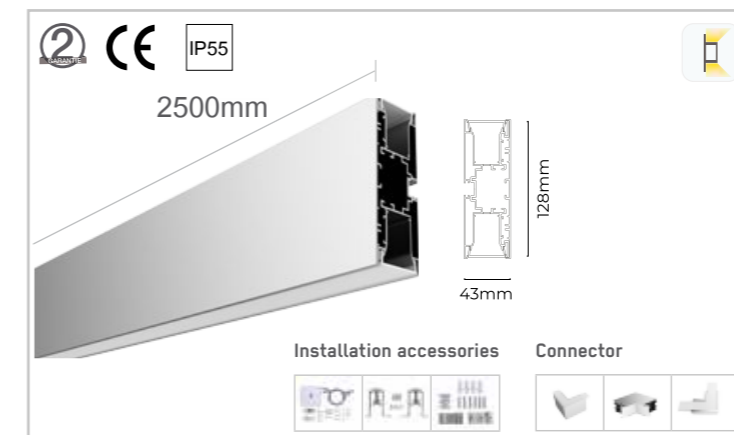


LX-PL-LC12843-20W	
⚡	20W
⚡	24V
💡	2290 Lm / 2700 Lm
🌈	2300K/2700K/3000K/4000K/5000K/6000K
Ra	>80 / >95
📐	153.78°

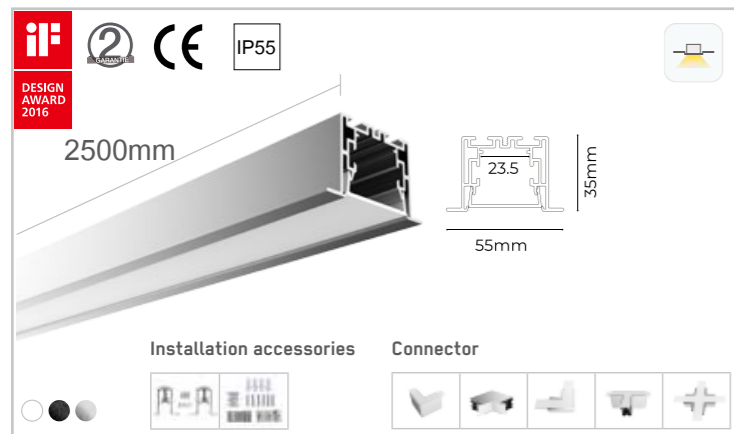

LX-PL-LE5535-20W	
⚡	20W
⚡	24V
💡	2290 Lm / 2700 Lm
🌈	2300K/2700K/3000K/4000K/5000K/6000K
Ra	>80 / >95
📐	110.79°




LX-PL-LE6935-25W	
⚡	25W
⚡	24V
💡	2760 Lm / 3250 Lm
🌈	2300K/2700K/3000K/4000K/5000K/6000K
Ra	>80 / >95
📐	102.62°

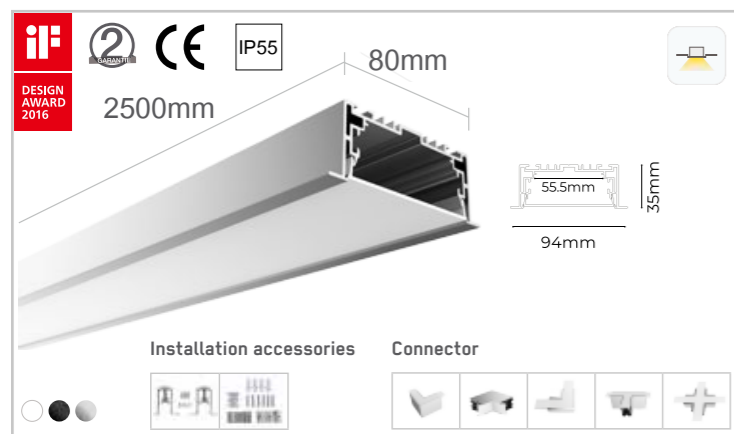

LX-PL-LE9435-30W	
⚡	30W
⚡	24V
💡	3310 Lm / 3900 Lm
🌈	2300K/2700K/3000K/4000K/5000K/6000K
Ra	>80 / >95
📐	111.57°



Flexible Series

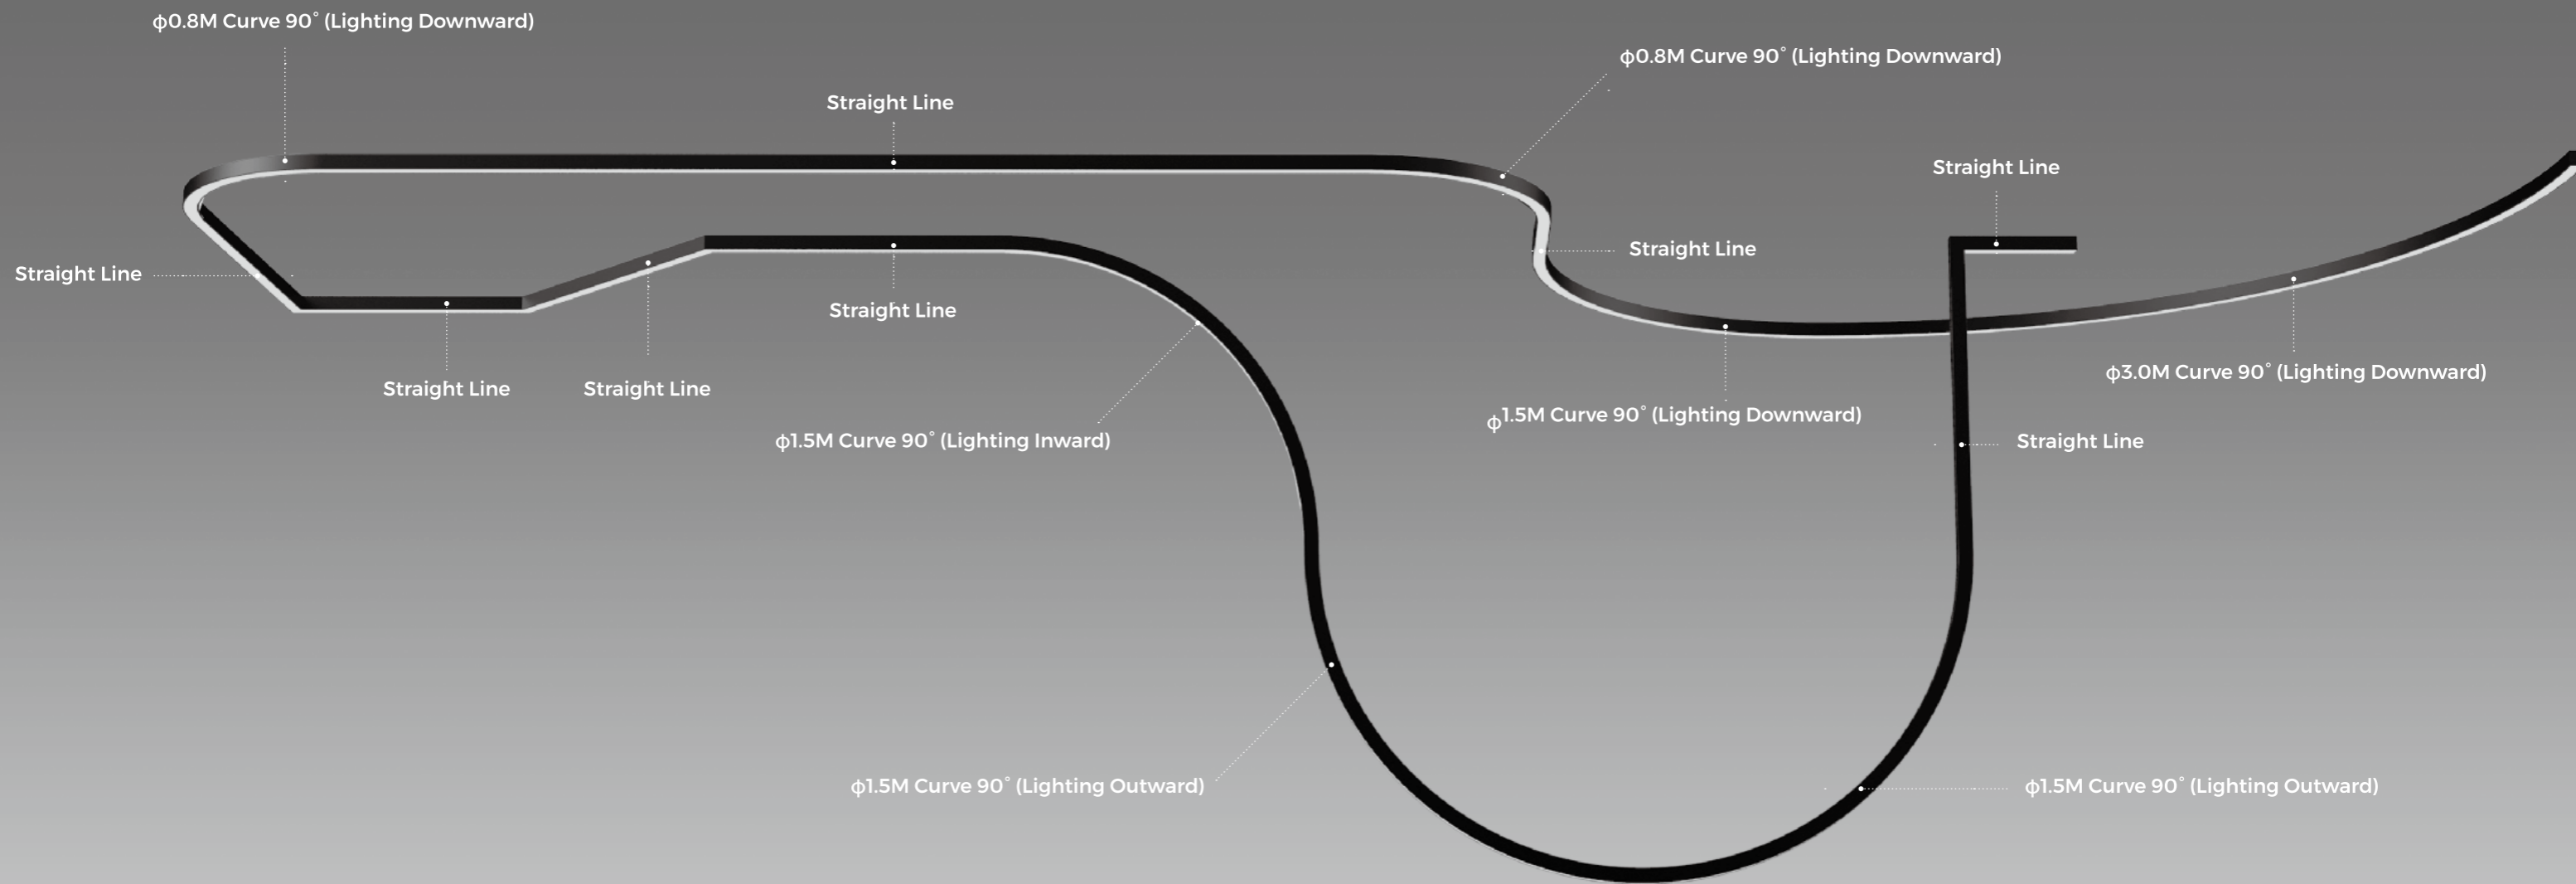

Modularized design:
8 modules can be combined and interconnected freely according to the spatial design.



Circular Application:
Can be interconnected into circular luminaires with different diameters.



Curve Application:
Can be interconnected into curves with different radians.




Flexible diffuser:
20m/roll flexible diffuser, ultra-long application in 3D space without connection and light leakage, 8 modules can share the same diffuser

Curve Lighting Solution


INSTALLATION ACCESSORIES



Pendant cable




Surface mounted
(Lighting Downward)



Surface mounted
(Lighting Inward/Outward)

LIGHT SOURCE



Flexible strip



Rigid Module

CCT

1900 K 2300 K

2700 K 3000 K

3500 K 4000 K

5000 K 6000 K

PROFILE



Lighting Downward



Lighting Inward



Lighting Outward




Curve



Straight Line

CONNECTORS

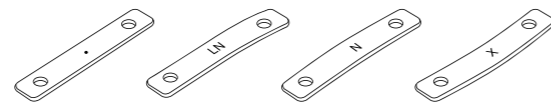

180° extender

LN-type

N-type

X-type

DIFFUSER




20m/roll



Suitable for all series

APPLICATION




Circular




Curve




3D

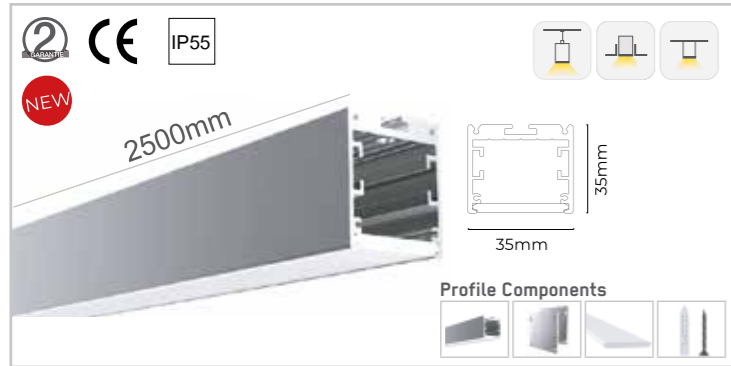


LX-PL-AS3535-2.5-19.2W	
⚡	19.2W
⚡	24V
☀️	2566 Lm
Ra	>80
📐	112.10°
🔧	Rigid Modular / Flexible strip

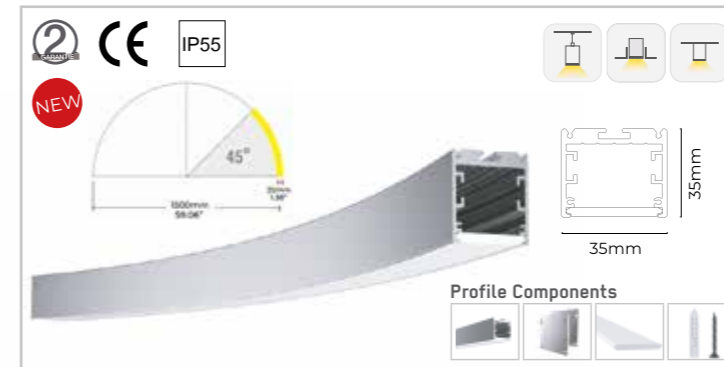


LX-PL-AS3535-15A45-19.2W	
⚡	19.2W
⚡	24V
☀️	2566 Lm
Ra	>80
📐	112.34°
🔧	Rigid Modular

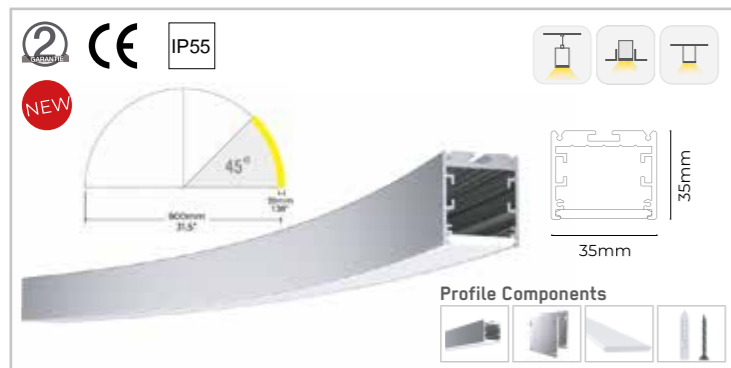


LX-PL-AS3535-8A45-19.2W	
⚡	19.2W
⚡	24V
☀️	2566 Lm
Ra	>80
📐	112.34°
🔧	Rigid Modular

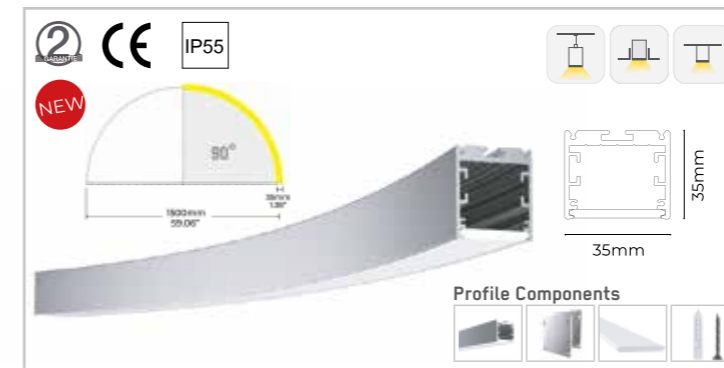

LX-PL-AS3535-15A90-19.2W	
⚡	19.2W
⚡	24V
☀️	2566 Lm
Ra	>80
📐	115.58°
🔧	Rigid Modular

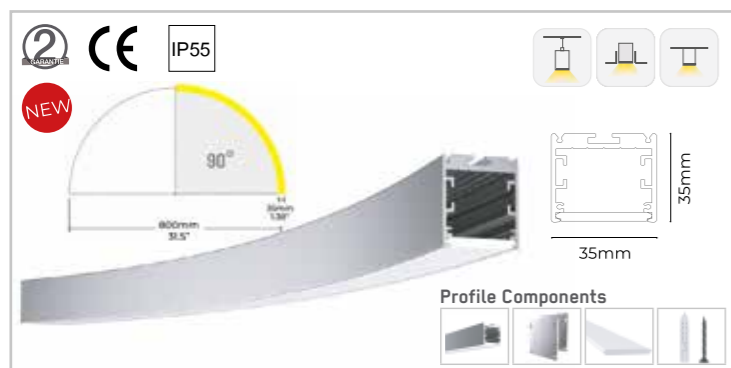


LX-PL-AS3535-8A90-19.2W	
⚡	19.2W
⚡	24V
☀️	2566 Lm
Ra	>80
📐	116.83°
🔧	Rigid Modular

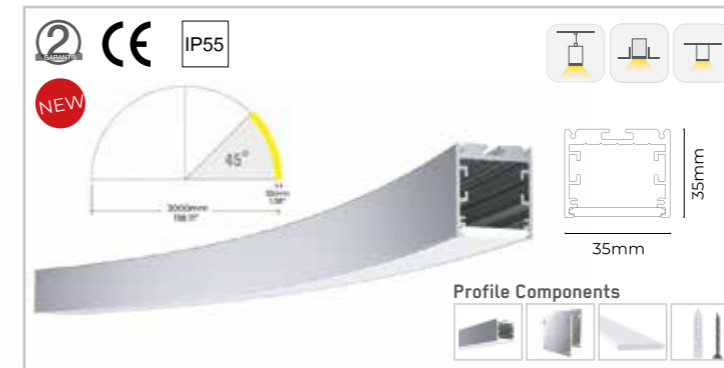

LX-PL-AS3535-30A45-19.2W	
⚡	19.2W
⚡	24V
☀️	2566 Lm
Ra	>80
📐	116°
🔧	Rigid Modular

Basic Modules

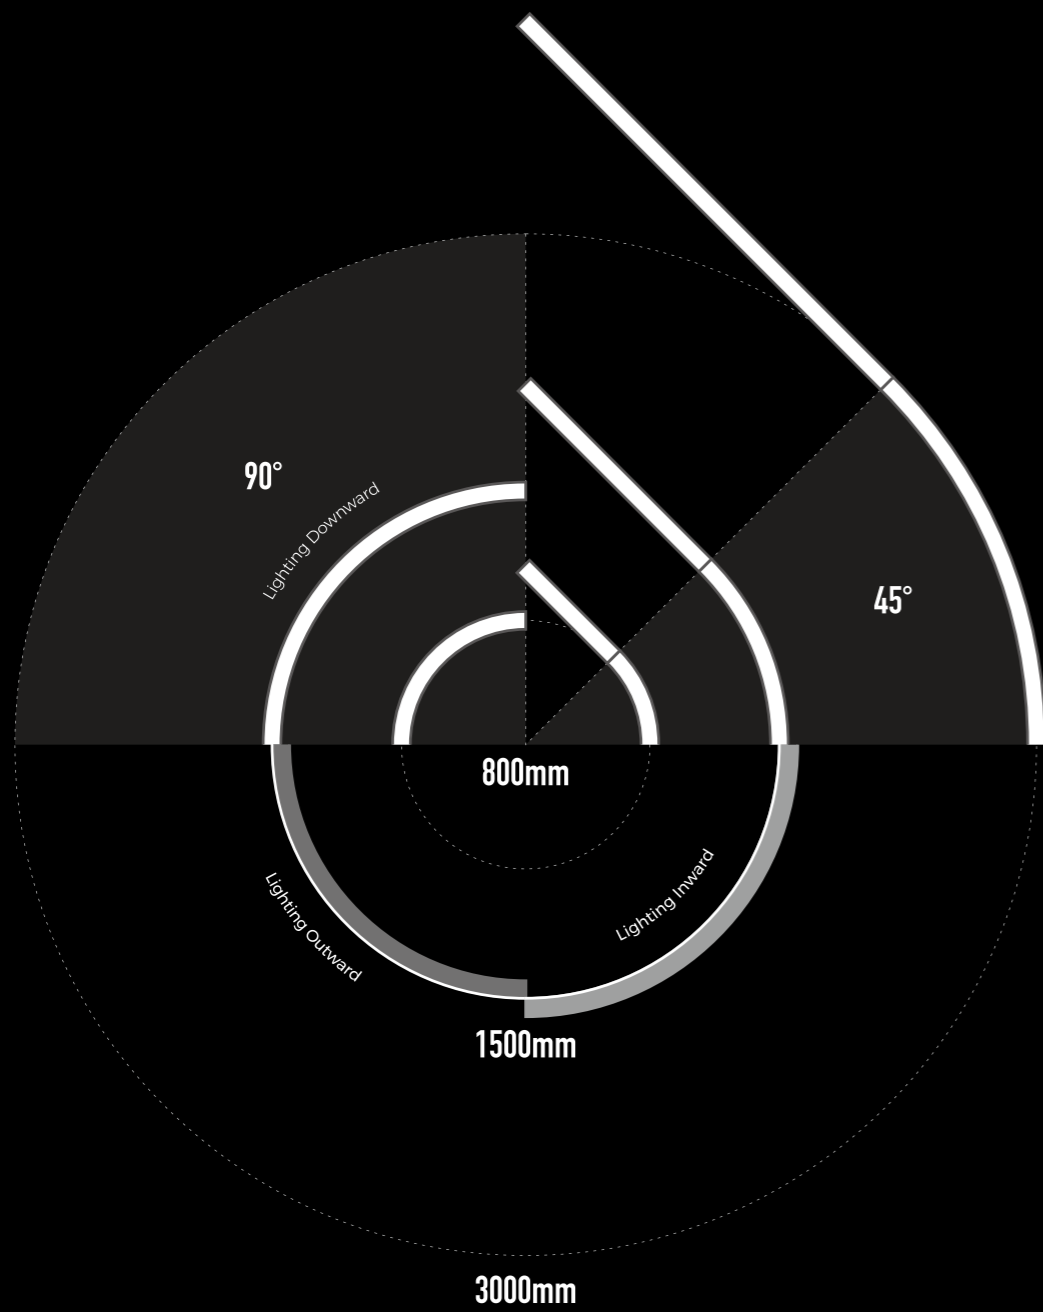

2 CE IP55

NEW

Profile Components

LX-PL-AS3535-15N90-19.2W	
⚡	19.2W
⚡	24V
💡	2120 Lm
Ra	>80
📐	115°
📏	Flexible strip




2 CE IP55

NEW

Profile Components

LX-PL-AS3535-15W90-19.2W	
⚡	19.2W
⚡	24V
💡	2120 Lm
Ra	>80
📐	115°
📏	Flexible strip

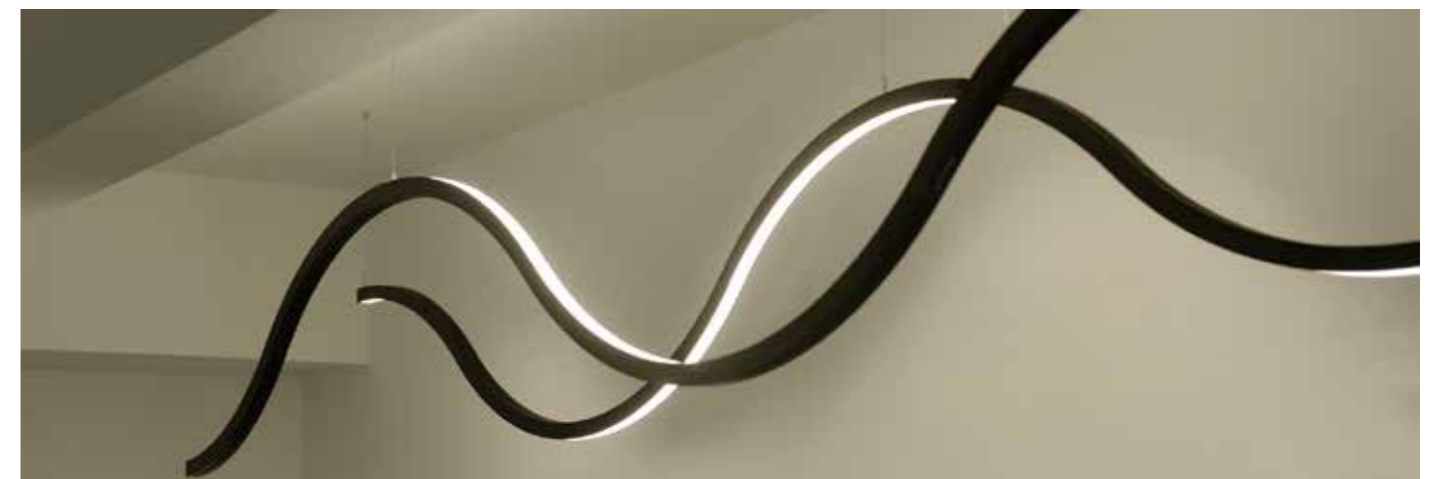

Finished Luminaires



φ3m
(Lighting Downward)



φ1.5m
(Lighting Outward)



φ1.5m
(Lighting Inward)



φ1.5m
(Lighting Downward)



φ0.8m
(Lighting Downward)

NEW CE IP55

835mm
32.87"
765mm
30.12"

LX-PL-AS3535-08A360-60W	
⚡	60W
⚡	24V
☀️	1630 Lm
Ra	>80/>95
📐	120°
🔧	Rigid Modular

NEW CE IP55

1535mm
60.43"
1465mm
57.68"

LX-PL-AS3535-15A360-105W	
⚡	105W
⚡	24V
☀️	2850 Lm
Ra	>80/>95
📐	120°
🔧	Rigid Modular

NEW CE IP55

3035mm
119.49"
2965mm
116.73"

LX-PL-AS3535-30A360-210W	
⚡	210W
⚡	24V
☀️	6420 Lm
Ra	>80/>95
📐	120°
🔧	Rigid Modular

NEW CE IP55

1512mm
59.53"
1442mm
56.77"

LX-PL-AS3535-15N360-105W	
⚡	105W
⚡	24V
☀️	2200 Lm
Ra	>80/>95
📐	120°
🔧	Rigid Modular

NEW CE IP55

1550mm
61.34"
1488mm
58.58"

LX-PL-AS3535-15W360-105W	
⚡	105W
⚡	24V
☀️	2870 Lm
Ra	>80/>95
📐	120°
🔧	Rigid Modular

Installation

Pendant



Pendant (Lighting Downward)



Pendant (Lighting Upward)



Pendant (Lighting Inward)



Pendant (Lighting Outward)




Pendant (Lighting Outward)




Pendant (Lighting Inward)


Wall mounted & Mounted away from the wall

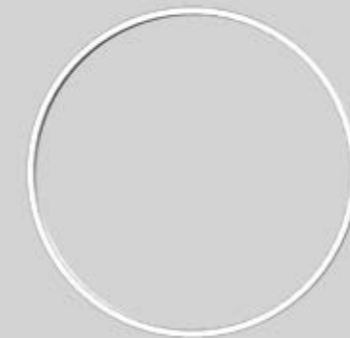


Wall mounted (Lighting Downward)

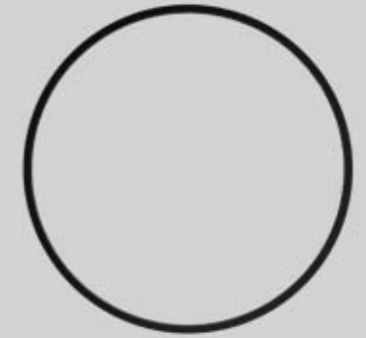

Wall mounted (Lighting Outward)

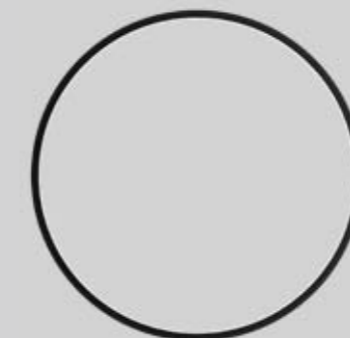

Wall mounted (Lighting Inward)

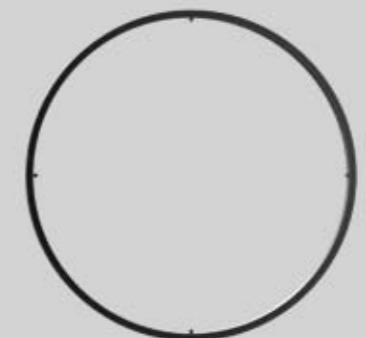

Mounted away from the wall (Indirect illumination)

Surface mounted & Recessed



Recessed (Lighting Downward)



Surface mounted (Lighting Downward)



Surface mounted (Lighting Outward)



Surface mounted (Lighting Inward)

1

Creative lighting design achieving ultra-slim size

2

Waterproof & dustproof design for light source protection

3

Silicone neon strip, install in seconds just by hold and press



Ultimate slim with 3.4mm luminous surface.




Used for wall edges and integrated into the wall by embedded design.




Ultra-slim, wall-mounted up and down light with 10.5mm thickness.





Skirting board:
Buckle structure design, super convenient installation and maintenance, multiple mounting methods such as floors and ceilings.

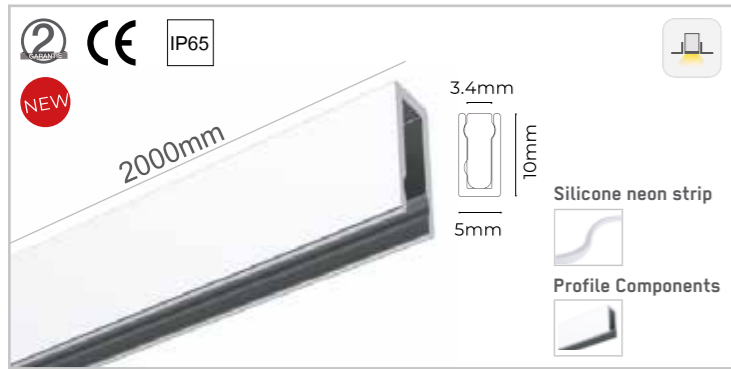

LX-PL-LS0510-5W	
⚡	5W
⚡	24V
☀️	70 Lm/m
Ra	>90
📐	110.50°

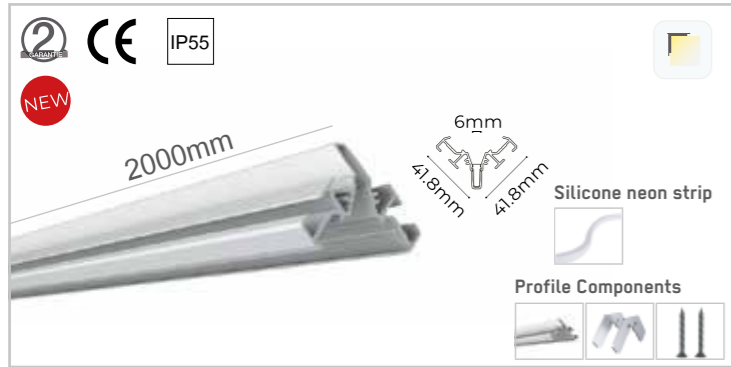


LX-PL-LG4242-13.5W	
⚡	13.5W
⚡	24V
☀️	133 Lm/m
Ra	>80
📐	71.24°

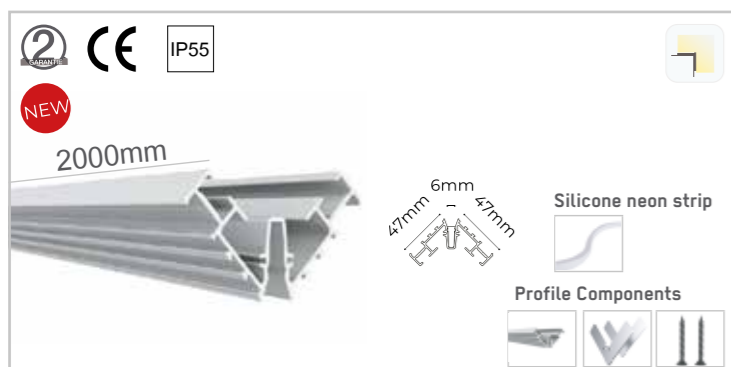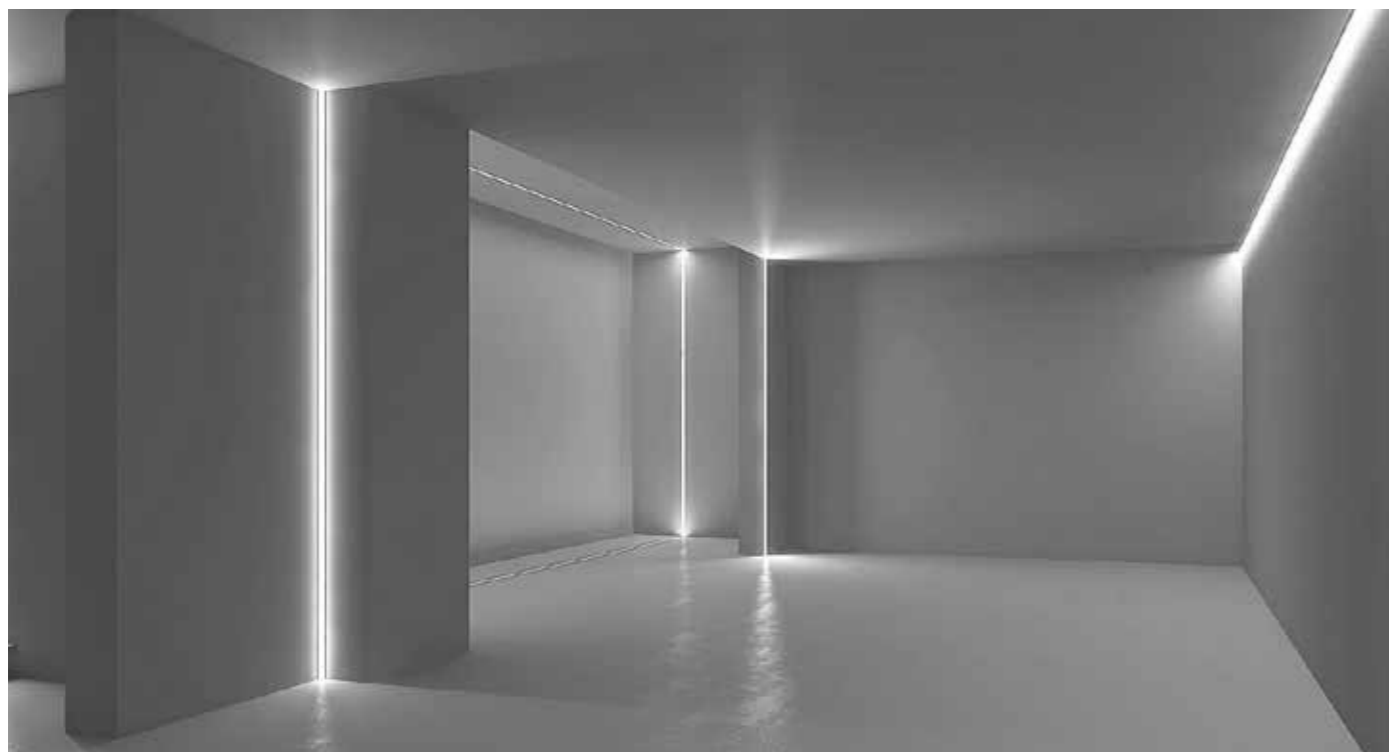


LX-PL-LG4747-13.5W	
⚡	13.5W
⚡	24V
☀️	133 Lm/m
Ra	>80
📐	72.88°


Installation Instruction

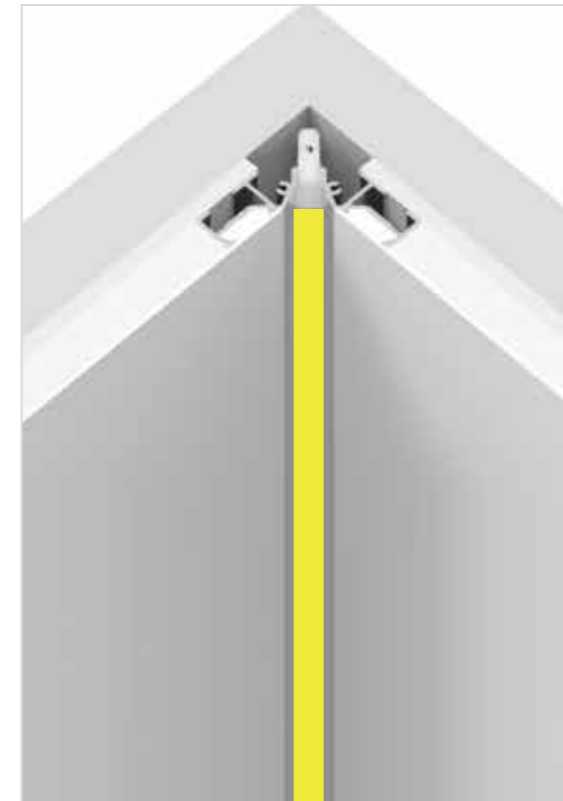

LG4242

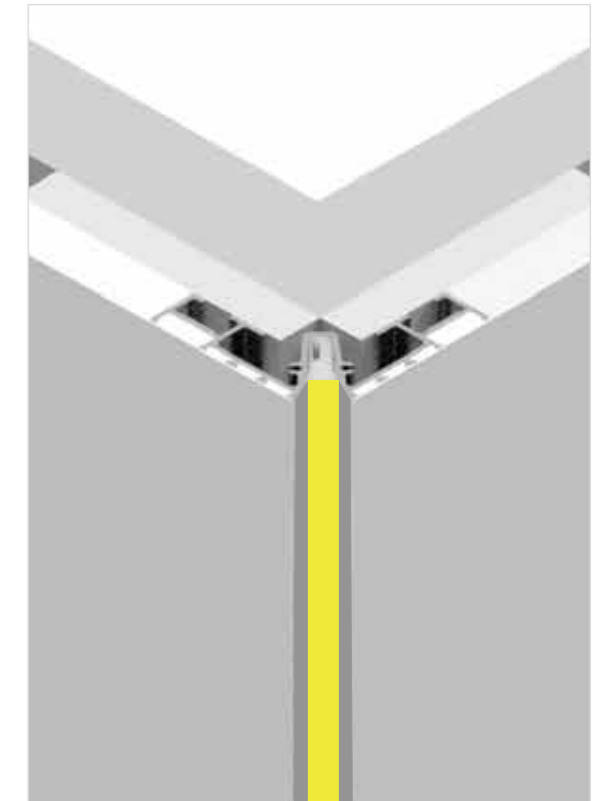

LG4747

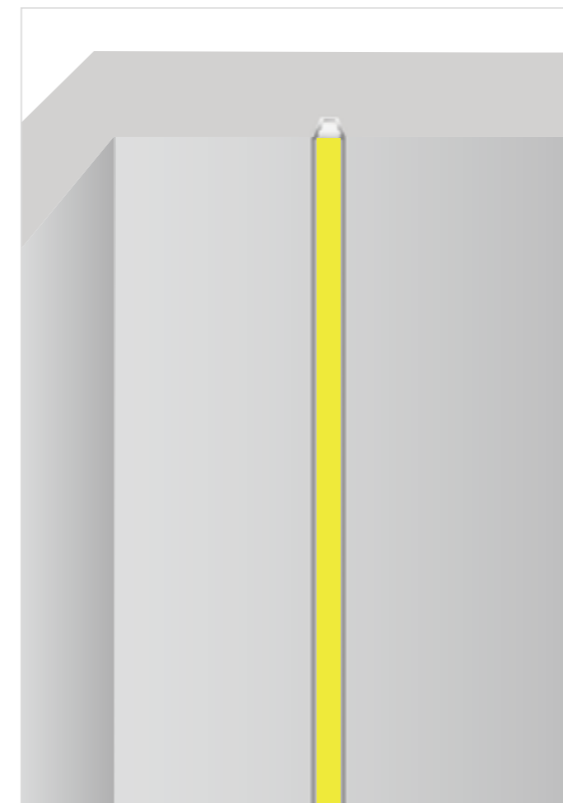

LS0510



LC7011



LG8513

2000mm

6mm

70mm

10.5mm

Silicone neon strip

Profile Components

LX-PL-LC7011-13.5W	
	13.5W
	24V
	133 Lm/m
Ra	>80
	24.80°




5000x8x1.2mm


9mm
0.35"

85mm
3.35"


13mm
0.51"

LX-PL-LG8513-8.6W	
	8.6W
	24V
	640 Lm / 710 Lm
Ra	>90

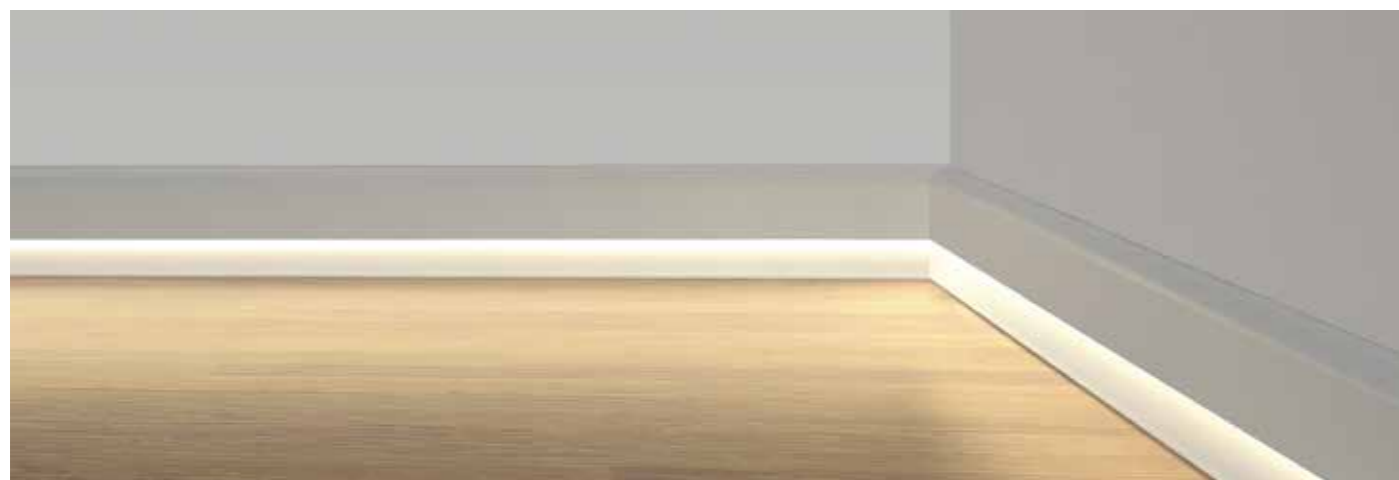


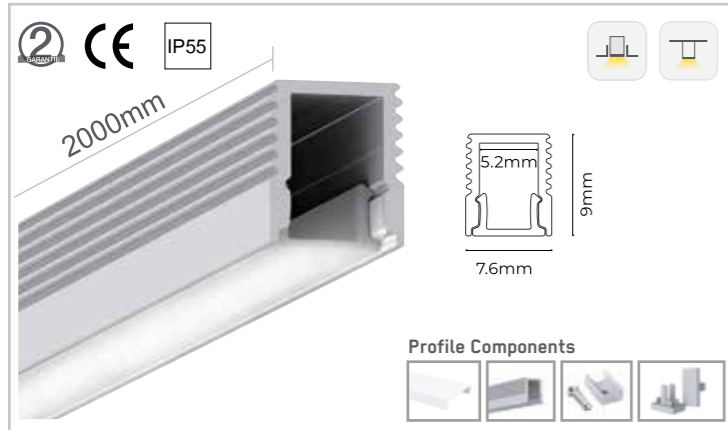


LX-PL-LS0709-5W	
⚡	5W
⚡	24V
💡	500 Lm
🌈	2700K/3000K/4000K/5000K/6000K
Ra	>90
📐	110°

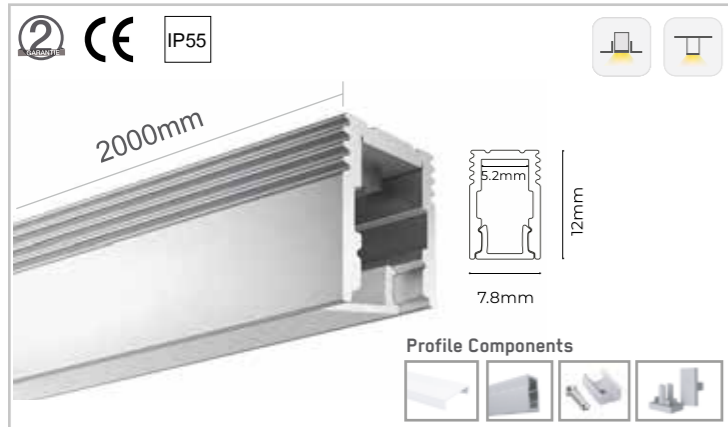

LX-PL-LS0812-5W	
⚡	5W
⚡	24V
💡	500 Lm
🌈	2700K/3000K/4000K/6000K
Ra	>90
📐	110°

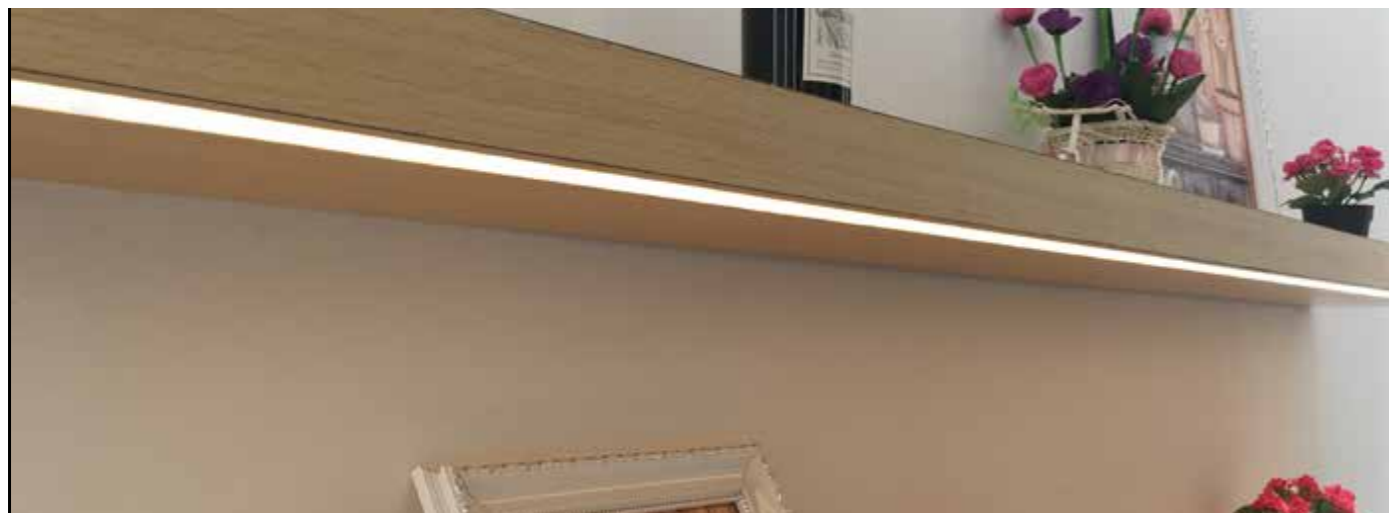


	LX-PL-LS1607-8W	LX-PL-LS1607-13W
⚡	8W	13W
⚡	24V	
💡	750 Lm	1200 Lm
🌈	2700K/3000K/4000K/6000K	
Ra	>90	
📐	115°	

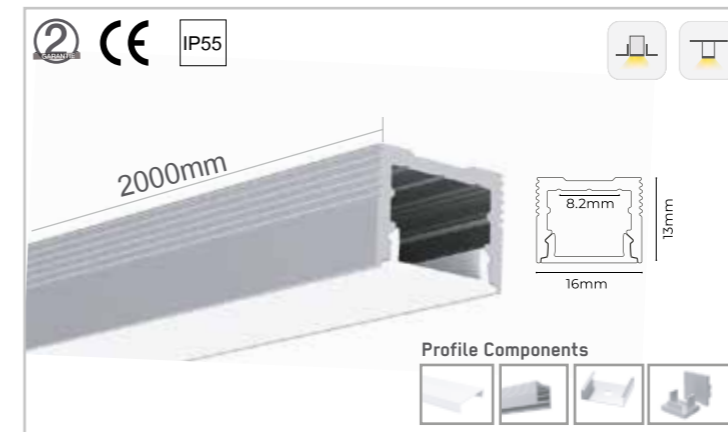


	LX-PL-LS1613B-6W	LX-PL-LS1613B-13W
⚡	6W	13W
⚡	24V	
💡	550 Lm	1050 Lm
🌈	2700K/3000K/4000K/6000K	
Ra	>90	
📐	115°	




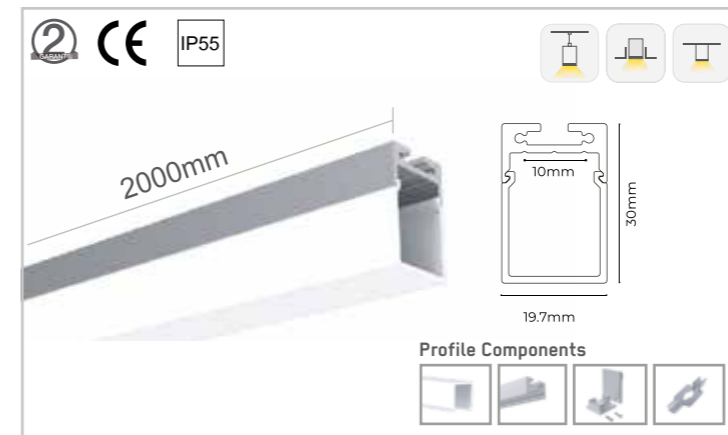


	LX-PL-LS1911PB-8W	LX-PL-LS1911PB-15W
⚡	8W	15W
⚡	24V	
💡	850 Lm	1600 Lm
🌈	2700K/3000K/4000K/6000K	
Ra	>90	
📐	135°	

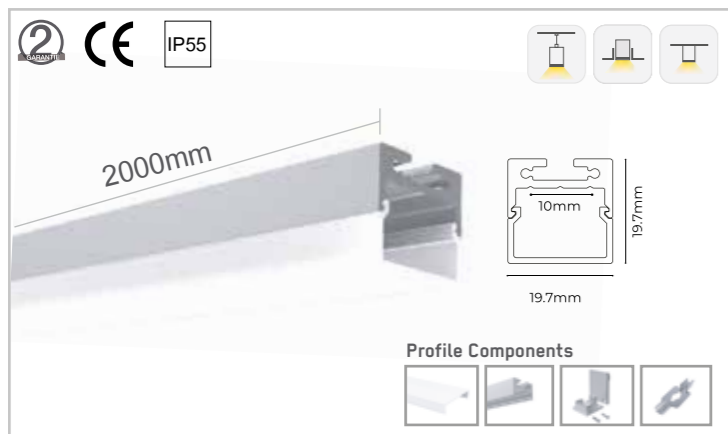

	LX-PL-LS1911KB-8W	LX-PL-LS1911KB-15W
⚡	8W	15W
⚡	24V	
💡	850 Lm	1600 Lm
🌈	2700K/3000K/4000K/6000K	
Ra	>90	
📐	105°	

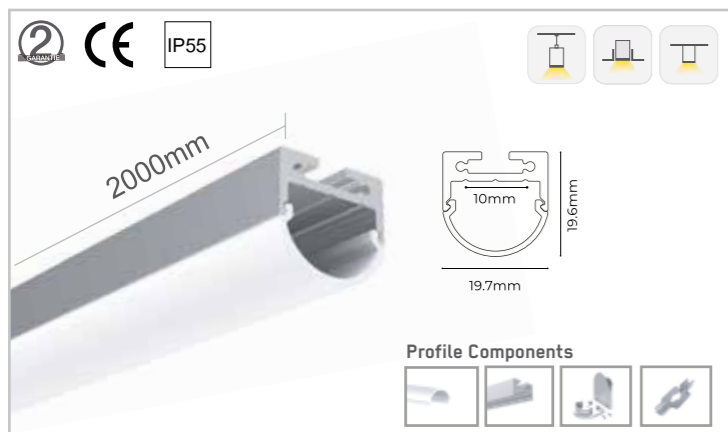



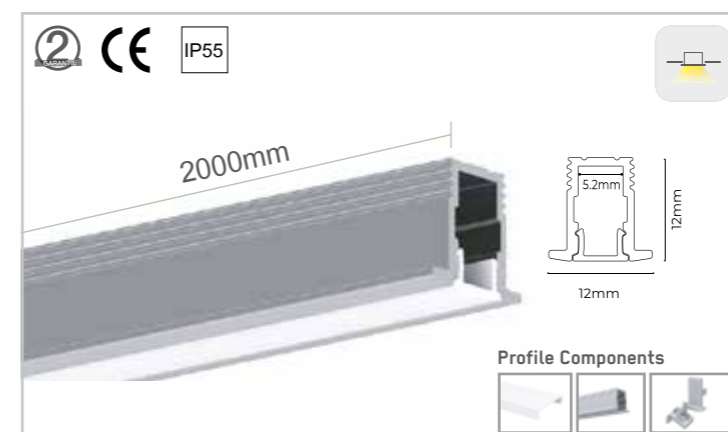

	LX-PL-LS1911CB-8W	LX-PL-LS1911CB-15W
⚡	8W	15W
⚡	24V	
💡	850 Lm	1600 Lm
🌈	2700K/3000K/4000K/6000K	
Ra	>90	
📐	120°	



	LX-PL-LE1212-5W
⚡	5W
⚡	24V
💡	500 Lm
🌈	2700K/3000K/4000K/6000K
Ra	>90
📐	110°




2000mm

8.2mm


25mm

13mm

Profile Components



	LX-PL-LE2513-6W	LX-PL-LE2513-13W
⚡	6W	13W
⚡	24V	
💡	550 Lm	1050 Lm
🌈	2700K/3000K/4000K/6000K	
Ra	>90	
📐	115°	

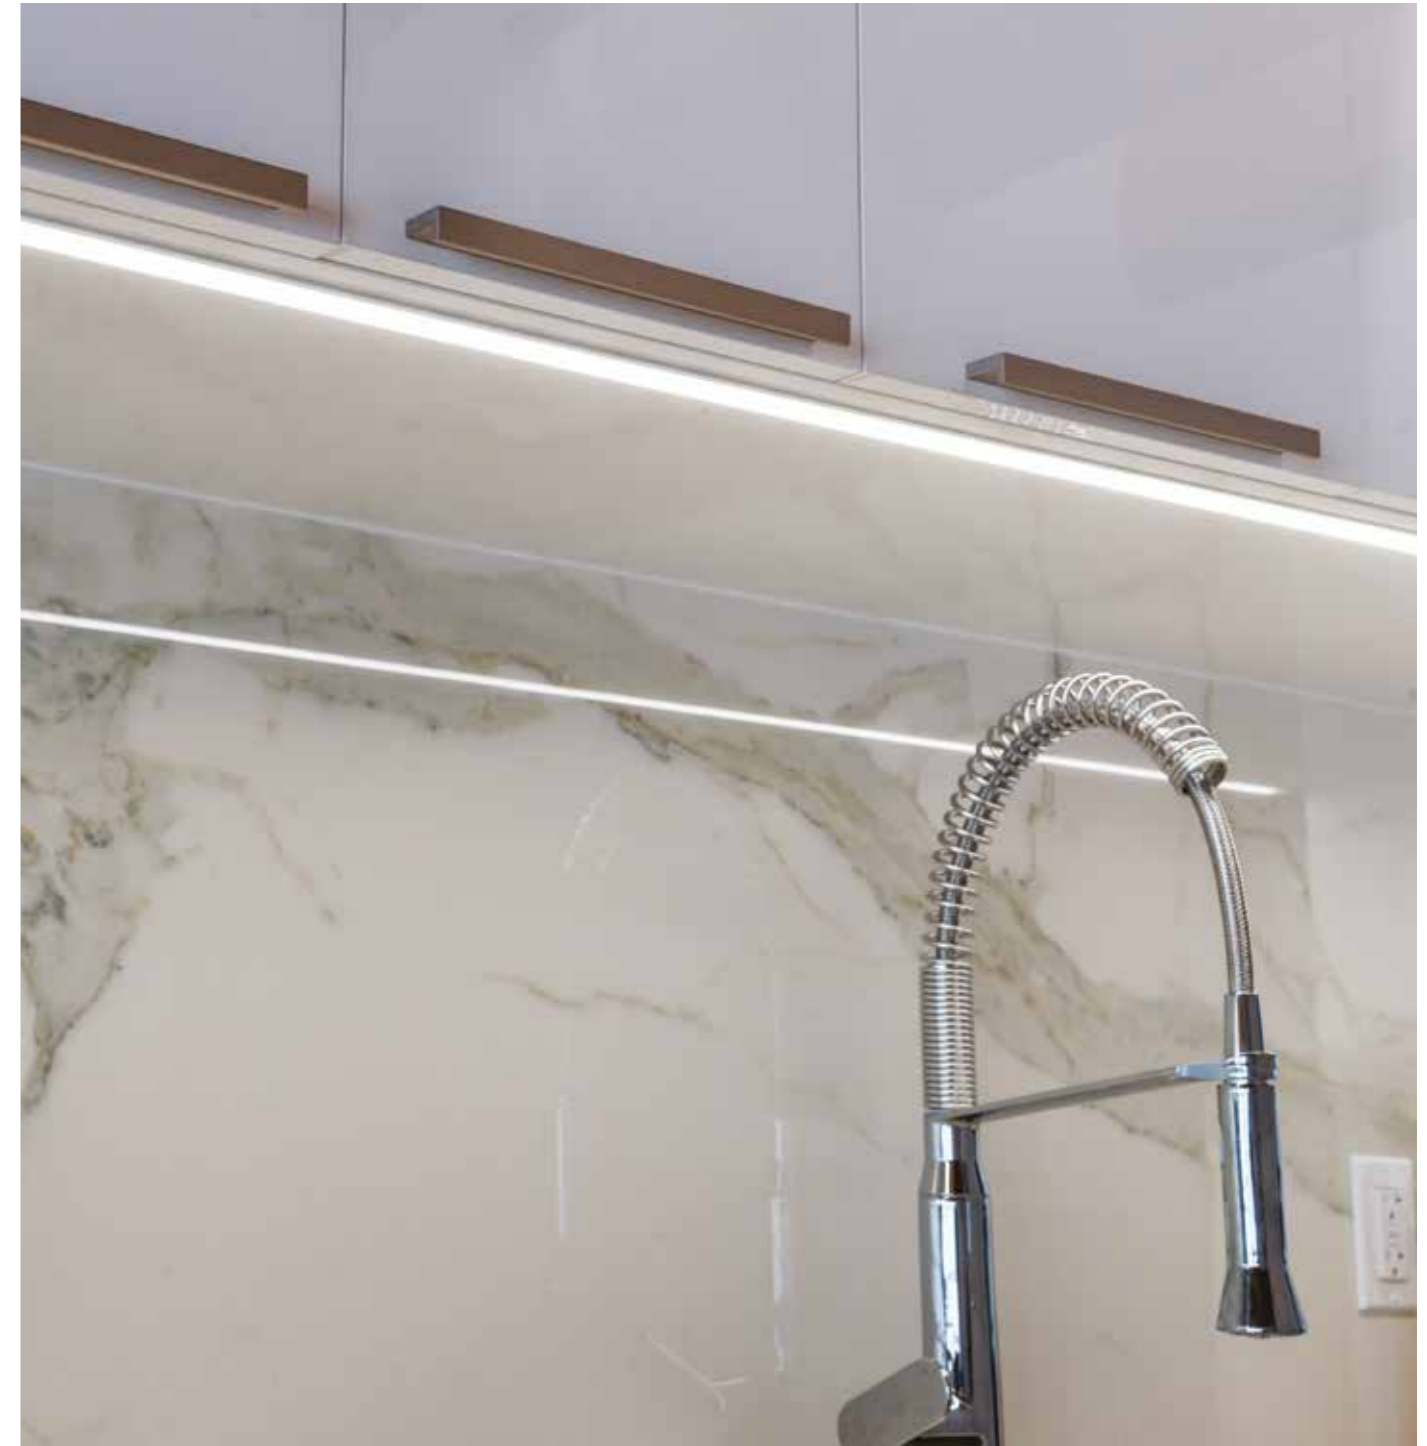






2000mm

10.7mm

25mm

7mm

Profile Components



	LX-PL-LE2507-8W	LX-PL-LE2507-13W
⚡	8W	13W
⚡	24V	
💡	750 Lm	1200 Lm
🌈	2700K/3000K/4000K/6000K	
Ra	>90	
📐	115°	



	LX-PL-LG1616C	LX-PL-LG1515C
⚡	6W / 13W	11W
⚡	24V	
💡	550 Lm / 1050 Lm	1350 Lm
🌈	2700K/3000K/4000K/6000K	
Ra	>90	
📐	125°	120°



	LX-PL-LG1616K-6W	LX-PL-LG1616K-13W
⚡	6W	13W
⚡	24V	
💡	550 Lm	1050 Lm
🌈	2700K/3000K/4000K/6000K	
Ra	>90	
📐	175°	




	LX-PL-LG3030CB-8W	LX-PL-LG3030CB-15W
⚡	8W	15W
⚡	24V	
💡	850 Lm	1508 Lm
🌈	2700K/3000K/4000K/6000K	
Ra	>90	
📐	120°	



	LX-PL-LG3030KB-8W	LX-PL-LG3030KB-15W
⚡	8W	15W
⚡	24V	
💡	850 Lm	1508Lm
🌈	2700K/3000K/4000K/6000K	
Ra	>90	
📐	170°	



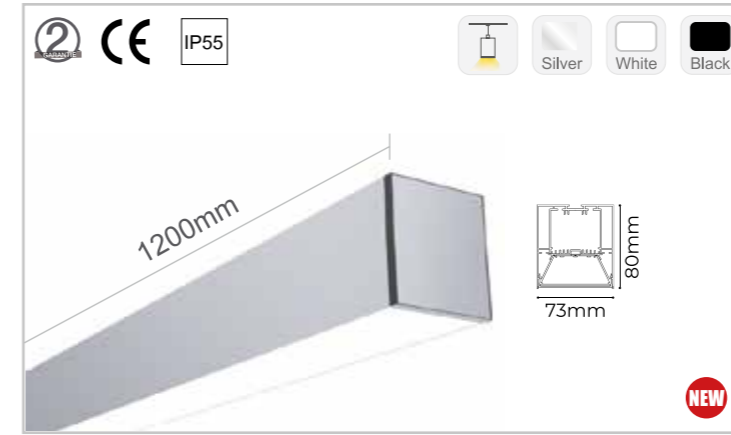

	LX-PL-LS70CA	LX-PL-LS70DA
⚡	36W/18W	36W/18W
🔌	100-277VAC 50Hz/60Hz	
💡	4200 Lm / 2400 Lm	3300 Lm / 1900 Lm
🌈	3000K/4000K/6000K	
Ra	>80	
📐	105°	85°



	LX-PL-LH70CA	LX-PL-LH70DA
⚡	(up) 18W (down) 36W (up) 18W (down) 18W	(up) 18W (down) 36W (up) 18W (down) 18W
🔌	100-277VAC 50Hz/60Hz	
💡	(up) 1800Lm (down) 4200Lm (up) 1800Lm (down) 2400Lm	(up) 1800Lm (down) 3300Lm (up) 1800Lm (down) 1900Lm
🌈	3000K/4000K/6000K	
Ra	>80	
📐	105°	85°



	LX-PL-LE70CA	LX-PL-LE70DA
⚡	36W/18W	36W/18W
🔌	100-277VAC 50Hz/60Hz	
💡	4200 Lm / 2400 Lm	3300 Lm / 1900 Lm
🌈	3000K/4000K/6000K	
Ra	>80	
📐	105°	85°



	LX-PL-LR70CA	LX-PL-LR70DA
⚡	36W/18W	36W/18W
🔌	100-277VAC 50Hz/60Hz	
💡	4200 Lm / 2400 Lm	3300 Lm / 1900 Lm
🌈	3000K/4000K/6000K	
Ra	>80	
📐	105°	85°



	LX-PL-LS50CA	LX-PL-LS50DA
⚡	25W/15W	25W/15W
🔌	100-277VAC 50Hz/60Hz	
💡	3000 Lm / 1800 Lm	2200 Lm / 1500 Lm
🌈	3000K/4000K/6000K	
Ra	>80	
☞	97°	85°



	LX-PL-LH50CA	LX-PL-LH50DA
⚡	(up) 10W (down) 25W (up) 10W (down) 15W	(up) 10W (down) 25W (up) 10W (down) 15W
🔌	100-277VAC 50Hz/60Hz	
💡	(up) 1800Lm (down) 4200Lm (up) 1800Lm (down) 2400Lm	(up) 1800Lm (down) 3300Lm (up) 1800Lm (down) 1900Lm
🌈	3000K/4000K/6000K	
Ra	>80	
☞	97°	85°



	LX-PL-LE50CA	LX-PL-LE50DA
⚡	25W/15W	25W/15W
🔌	100-277VAC 50Hz/60Hz	
💡	3000 Lm / 1800 Lm	2200 Lm / 1500 Lm
🌈	3000K/4000K/6000K	
Ra	>80	
☞	97°	85°



	LX-PL-LR50CA	LX-PL-LR50DA
⚡	25W/15W	25W/15W
🔌	100-277VAC 50Hz/60Hz	
💡	3000 Lm / 1800 Lm	2200 Lm / 1500 Lm
🌈	3000K/4000K/6000K	
Ra	>80	
☞	97°	85°



NEW

LX-PL-LT120-36W	
	36W
	24V
	3800 Lm / 3220 Lm
	3000K/4000K/6000K
	>80 / >90
	135°


LX-PL-LT60-20W	
	20W
	24 V
	2700 Lm / 2290 Lm
	3000K/4000K/6000K
	>80 / >90
	140°

NEW


LX-PL-LT90-9.5W	
	9.5 W
	24 V
	1510 Lm / 1280 Lm
	3000K/4000K/6000K
	>80 / >90
	155°





Surface mounted

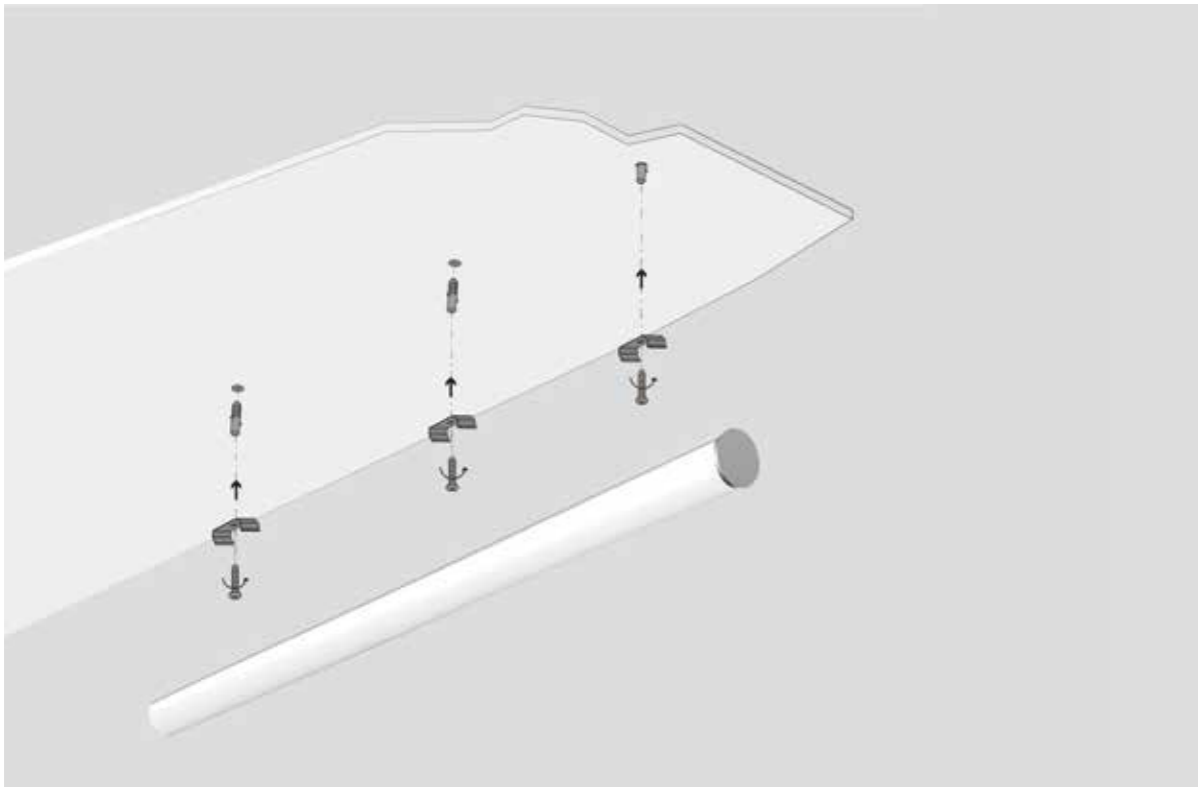

Interconnection Instruction

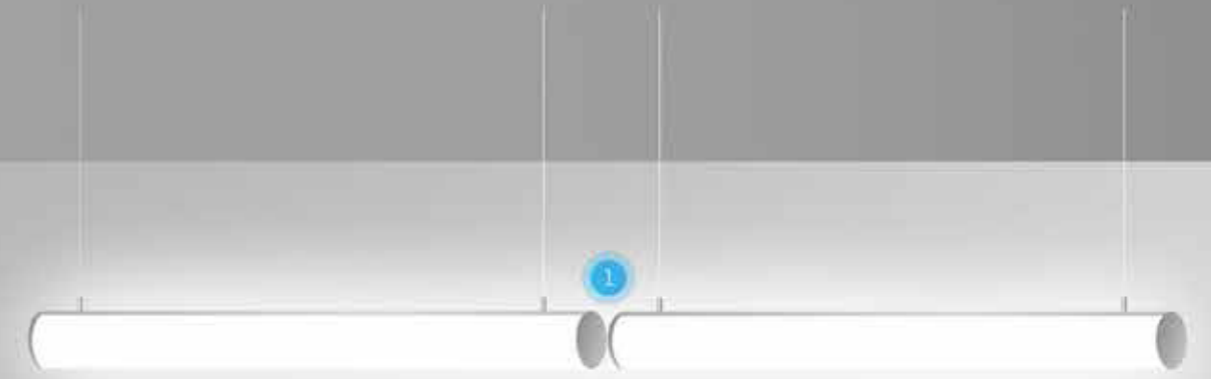



Pendant

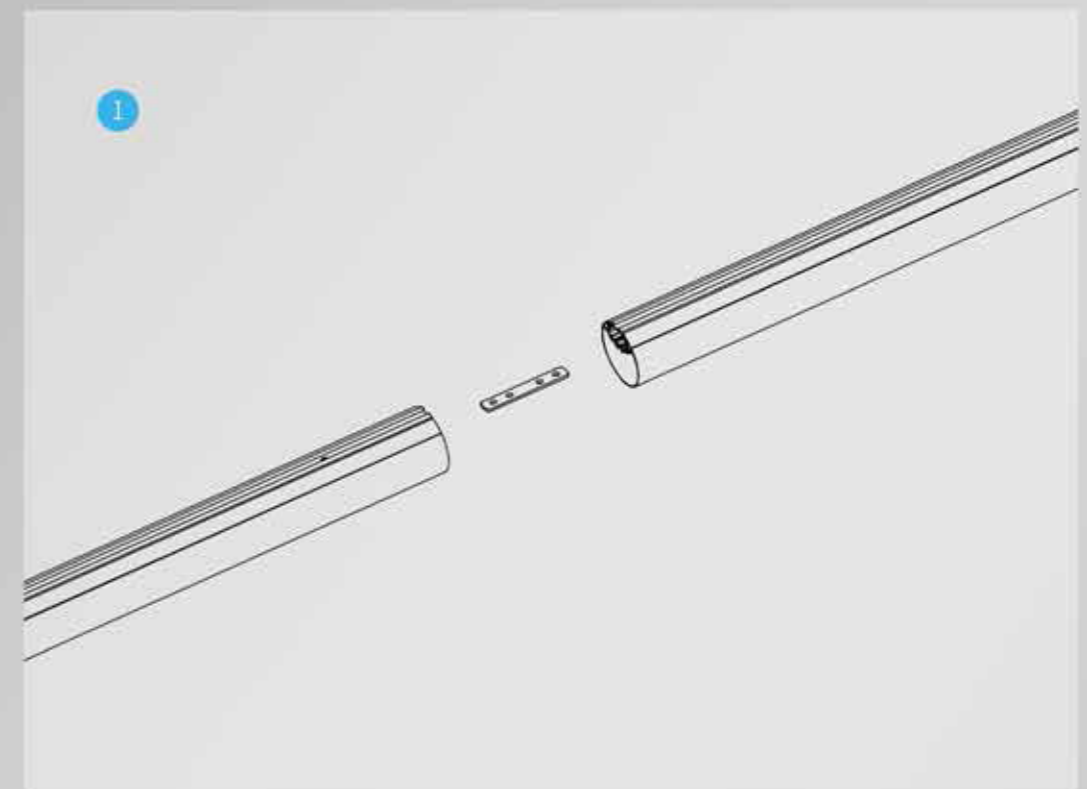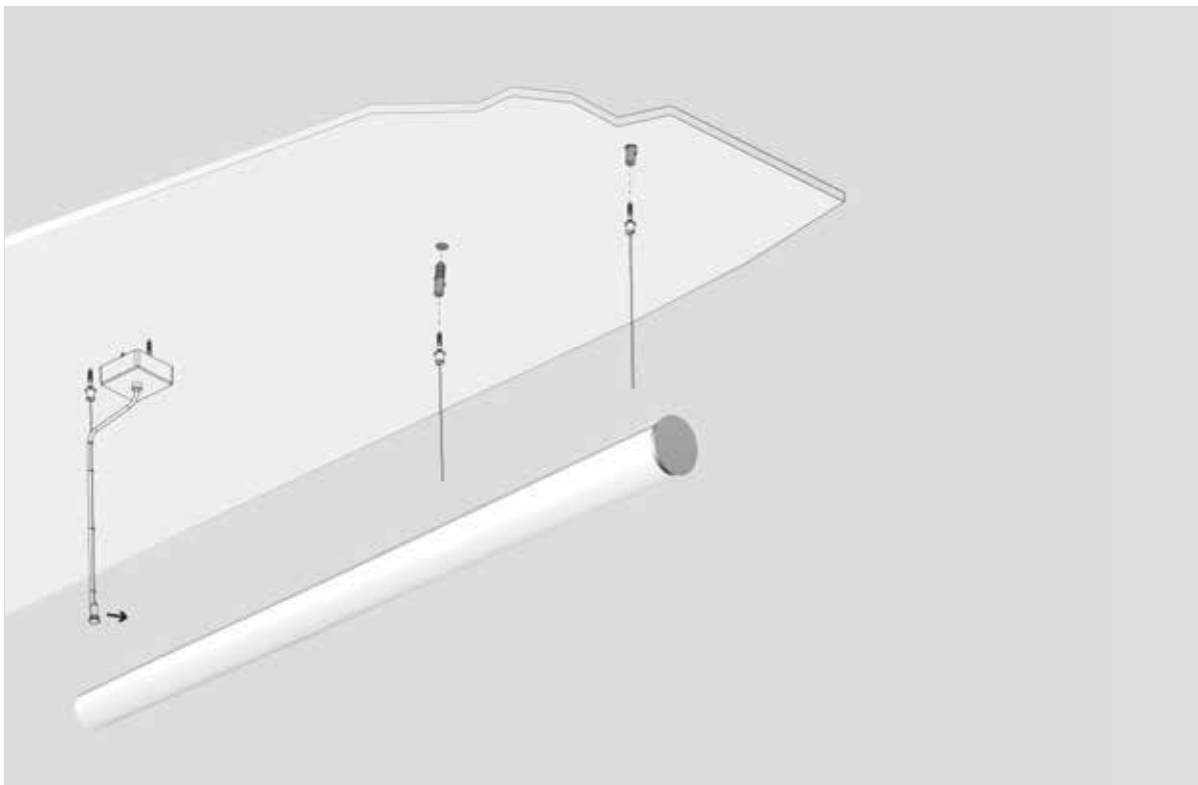



Multiple light distributions,
select freely, flexible application.

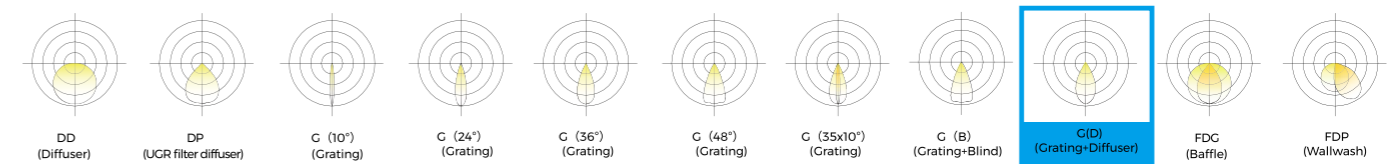


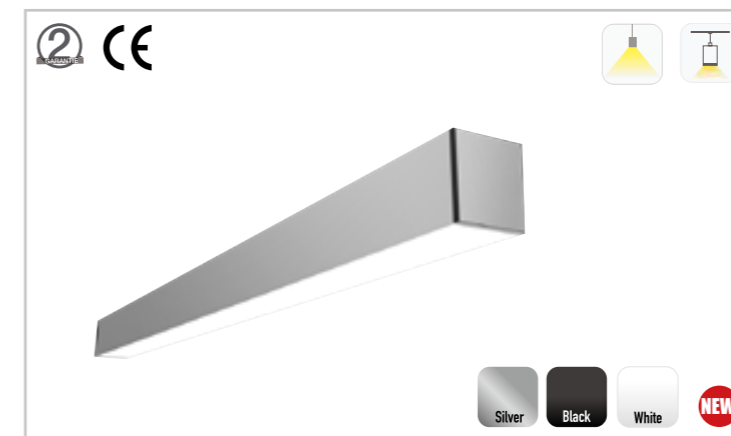


LX-PL-LS50DD	
⚡	26W / 38W / 56W
U _q	100-220VAC 50Hz/60Hz
☀️	3000 Lm / 4200 Lm / 6000 Lm
🌈	3000K/4000K
Ra	>80
☹️	97°



LX-PL-LS50G	
⚡	28W / 38W / 56W
U _q	100-220VAC 50Hz/60Hz
☀️	2800 Lm / 3800 Lm / 5600 Lm
🌈	3000K/4000K
Ra	>80
☹️	48°

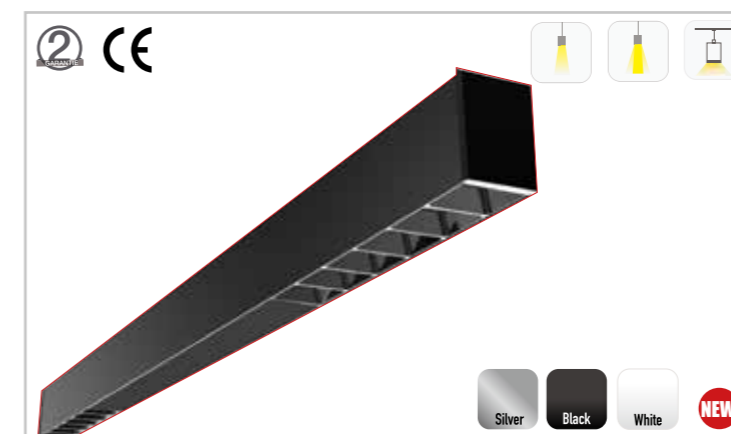

LX-PL-LS50GB	
⚡	20W
U _q	100-220VAC 50Hz/60Hz
☀️	1800 Lm
🌈	3000K/4000K
Ra	>80
☹️	48°

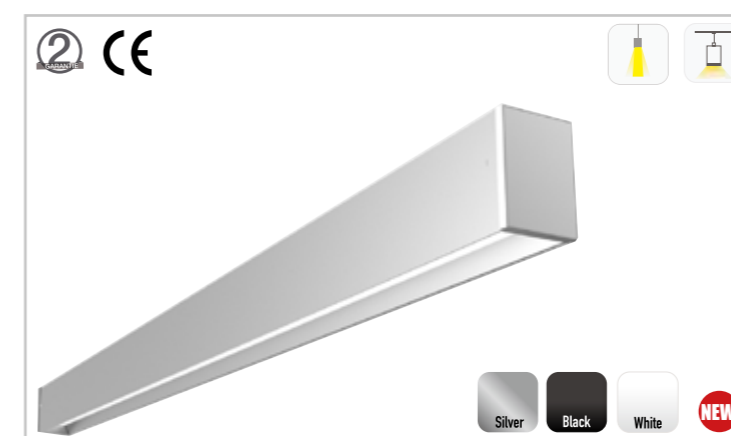

LX-PL-LS50FDG	
⚡	26W / 38W / 56W
U _q	100-220VAC 50Hz/60Hz
☀️	2800 Lm / 4000 Lm / 5800 Lm
🌈	3000K/4000K
Ra	>80
☹️	100° x 65°

DECORATIVE



IP20

	LX-PEN-MS-3-110W	LX-PEN-MS-3-150W	LX-PEN-MS-3-163W	LX-PEN-MS-3-180W
⚡	110W	150W	163W	180W
📏	Ø450*Ø600+Ø800* H1800mm	Ø600+800+Ø1000*H1800mm	Ø800+Ø1000+Ø1200*H1800mm	Ø1000+Ø1200+Ø1500*H1800mm
🔌	AC 100 - 240V			
💡	2835 SMD			
🌈	3000-4000-6000K			
☀️	6 600Lm	8 250Lm	9 560Lm	10 180Lm



IP20

	LX-PEN-MS-1-16W	LX-PEN-MS-1-25W	LX-PEN-MS-1-36W	LX-PEN-MS-1-42W	LX-PEN-MS-1-60W	LX-PEN-MS-1-86W	LX-PEN-MS-1-100W
⚡	16W	25W	36W	42W	60W	86W	100W
📏	Ø300*H1500mm	Ø450*H1500mm	Ø600*H1500mm	Ø800*H1500mm	Ø1000*H1500mm	Ø1600*H1500mm	Ø2000*H1500mm
🔌	AC 220-240 V						
💡	2835 SMD						
🌈	3000-4000-6000K						
☀️	780Lm	1 650Lm	2 380Lm	2 776Lm	3 210Lm	4 400Lm	5 230Lm



IP20

	LX-PEN-MS-1-64W	LX-PEN-MS-1-67W	LX-PEN-MS-1-75W
⚡	64W	67W	75W
📏	Ø1000*H1800mm	Ø1200*H1800mm	Ø1500*H1800mm
🔌	AC 100 - 240V		
💡	2835 SMD		
🌈	3000-4000-6000K		
☀️	4 977Lm	5 210Lm	5 832Lm




IP20

	LX-PEN-MS-1-12W	LX-PEN-MS-1-24W	LX-PEN-MS-1-38W	LX-PEN-MS-45W	LX-PEN-MS-2-65W	LX-PEN-MS-2-80W
⚡	12W	24W	38W	45W	65W	80W
📏	Ø200*H1000mm	Ø450*H1000mm	Ø600*H1000mm	Ø800*H1000mm	Ø450+Ø600	Ø600+Ø800
🔌	AC 100 - 240V					
💡	2835 SMD					
🌈	3000-4000-6000K					
☀️	880Lm	1 960Lm	2 840Lm	3 500Lm	3 900Lm	4 900Lm



IP20



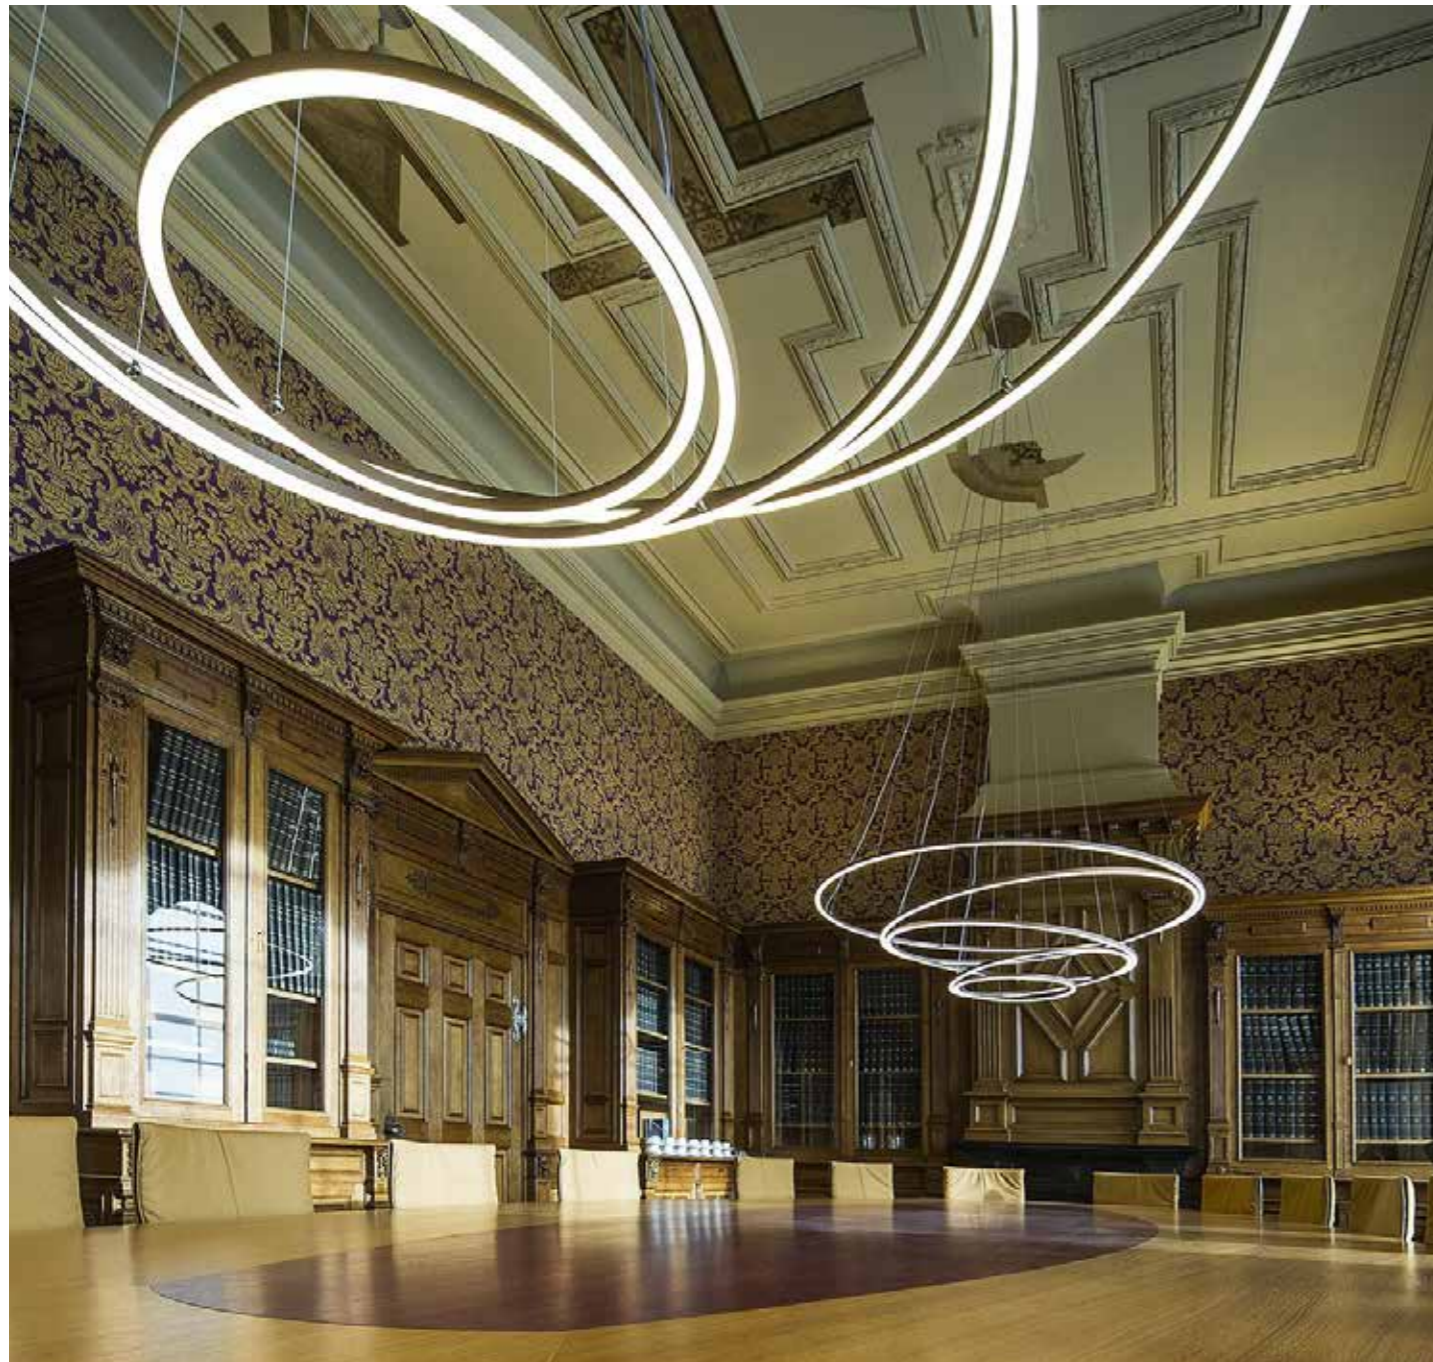

IP20

LX-PEN-MS-7-340W	
	340W
	Ø300+Ø450+Ø600+Ø800+Ø1000+Ø1200+Ø1500*H2800mm
	AC 100 - 240V
	2835 SMD
	3000-4000-6000K
	26 441Lm



IP20				
	66W	105W	175W	
	Ø600*Ø450*H1500mm	Ø800+Ø650+Ø450*H1500mm	Ø1000*Ø851+Ø650+Ø300*H1500mm	Ø1000+Ø851+Ø650+Ø500+ Ø300*H1500mm
	AC 220-240 V			
	2835 SMD			
	3000-4000-6000K			
	4 150Lm	6 070Lm	6400 Lm/NW:6940 Lm/CW:8010 Lm	6410 Lm



IP40

	LX-PEN-3R-16.8W	LX-PEN-3R-25W	LX-PEN-6104R-25W
⚡	16.8W	25W	
💡	1276 lm	1900 lm	
🔌	220-240VAC 50/60Hz		
🌞	Cree COB		
🌈	2700K / 6000K		
Ra	≥80 ≥90		
📐	120°		
🔌	Remote electronic power supply		
📷	PHASE/1-10V /DALI as options		
📏	Ø350x70mm	Ø350x70mm	Ø450x70mm

IP40

	LX-PEN-6R-45W	LX-PEN-9R-110W	LX-PEN-2R-215W
⚡	45W	110W	215W
💡	3420 lm	8360 lm	16360 lm
🔌	220-240VAC 50/60Hz		
🌞	Cree COB		
🌈	2700K / 6000K		
Ra	≥80 ≥90		
📐	120°		
🔌	Remote electronic power supply		
📷	PHASE/1-10V /DALI as options		
📏	Ø600x70mm	Ø950x70mm	Ø1200x70mm






	LX-SRPA-3R-16.8W	LX-SRPA-4ER-16.8W	LX-SRPA-4R-25W	LX-SRPA-6R-45W	LX-SRPA-9R-110W	LX-SRPA-2R-215W
⚡	16.8W	25W	45W	110W	215W	
💡	1276 lm	1900 lm	3420 lm	8360 lm	16360 lm	
🔌	220-240VAC 50/60Hz					
🌞	Cree COB					
🌈	2700K / 6000K					
Ra	≥80 ≥90					
📐	120°					
🔌	Remote electronic power supply					
📷	PHASE/1-10V /DALI as options					
📏	Ø350x70mm	Ø350x70mm	Ø450x70mm	Ø600x70mm	Ø950x70mm	Ø1200x70mm
IP40						




LX-PEN-111-6W	LX-PEN-112-9W	LX-PEN-411-6W	LX-PEN-412-9W	LX-PEN-431-25W	LX-PEN-461-40W	LX-PEN-171-70W
6W	9W	6W	9W	25W	25W	70W
AC220-240V						
450Lm	720Lm	450Lm	720Lm	2160Lm	3510Lm	5400Lm
3000K/4000K						
Ra >80						
IP20						

LX-PEN-211-12W	LX-PEN-231-35W	LX-PEN-251-60W	LX-PEN-252-60W
12W	35W	60W	60W
AC220-240V			
990Lm	2970Lm	4590Lm	4590Lm
3000K/4000K			
Ra >80			
IP20			











	LX-PEN-911-7W	LX-PEN-212-9W	LX-PEN-211-10W
⚡	7W	7W	10W
🔌	AC220-240V		
💡	420Lm	420Lm	540Lm
🌈	3000K/4000K		
Ra	>80		
📐	8°/12°/24°/40°		15°/22°/36°
📏			
IP20			

	LX-PEN-611-80W	LX-PEN-621-135W	LX-PEN-631-190W
⚡	80W	135W	190W
🔌	AC220-240V		
💡	3860Lm	6270Lm	9160Lm
🌈	3000K/4000K		
Ra	>80		
📏			
IP20			





		
	LX-PEN-311-8W	LX-PEN-331-25W
⚡	8W	25W
⚡	AC220-240V	
💡	280Lm	840Lm
🌈	3000K/4000K	
Ra	>80	
⏏		
IP20		

			
	LX-PEN-411-10W	LX-PEN-412-7W	LX-PEN-431-20W
⚡	10W	7W	20W
⚡	AC220-240V		
💡	200Lm	260Lm	780Lm
🌈	3000K/4000K		
Ra	>80		
🔆	8°/12°/24°/40°		
⏏			
IP20			



	LX-PEN-611-7W	LX-PEN-613-12W	LX-PEN-615-17W	LX-PEN-612-7W	LX-PEN-614-12W	LX-PEN-616-17W
⚡	7W	12W	17W	7W	12W	17W
U _q	AC220-240V					
☀	240Lm	420Lm	580Lm	240Lm	420Lm	580Lm
🌈	3000K/4000K					
Ra	>80					
↔						
IP20						



	LX-PEN-631-35W	LX-PEN-632-35W	LX-PEN-751-40W	LX-PEN-771-70W
⚡	35W	35W	40W	70W
U _q	AC220-240V			
☀	1240Lm	1240Lm	2350Lm	4110Lm
🌈	3000K/4000K			
Ra	>80			
↔				
IP20				





		
LX-PEN-501-6.5W	LX-PEN-503-6.5W	LX-PEN-530-19.5W
6.5W	6.5W	19.5W
240Lm	240Lm	720Lm
	3000K/4000K	
	>80	
		
IP20		



			
LX-PEN-BLYP-8	LX-PEN-BLYP-7	LX-WL-BLYT-8	LX-WL-BLYT-7

	Metal/Wood	
0225*H1500mm		0225*H235mm
	E27	

	
LX-WL-BLYW-7	LX-WL-BLYW-8

	Metal/Wood
H280*W150mm	
	E27



	
IP20	IP20
LX-PEN-2008S-17W	LX-PEN-2008M-17W
17W	17W
Ø325*H1500mm	Ø450*H1500mm
AC 100 - 240V	
2835 SMD	
3000-4000-6000K	
1 487 Lm	1 487 Lm



	IP20
LX-PEN-2063S-33W	
33W	
L1200*W55*H1500mm	
AC 100 - 240V	
3000-4000-6000K	
2 887Lm	



	IP20
LX-PEN-2059L-69W	
69W	
L1170*W115*H1500mm	
AC 100 - 240V	
2835 SMD	
3000-4000-6000K	
6037 Lm	











		
LX-PEN-INDP19	LX-PEN-INDP17	LX-PEN-INDP18
Metal		
Ø405*H1500mm	Ø455*H1500mm	Ø525*H1500mm
E27		

	
LX-PEN-INDP11	LX-PEN-INDP12
Metal	
Ø650*H1500mm	
E27	

		
LX-PEN-INDP10	LX-PEN-INDP13	LX-WL-INFPP13
Metal		Metal/Wood
Ø450*H1500mm	Ø500*H1500mm	Ø500*H1700mm
E27		

					
Optional colors		Optional colors			
LX-WL-DISH45	LX-WL-DISH70			LX-WL-DISH70	
Metal/Wood			Metal/Wood		
H390*W450*L260mm			H600*W700*L390mm		
E27					

		
LX-PEN-WICP-2	LX-PEN-WICP-6	LX-PEN-WICP-1
Plated Aluminium		
Ø45*H1500mm		
E27		

		
LX-PEN-WICP-5	LX-PEN-WICP-8	LX-PEN-WICP-7
Painted Aluminium		
Ø45*H1500mm		
E27		





*Luxio, Où comment conjuguer
luxe et lumière*