

DOWNLIGHT



GRIDIX B



GRIDIX B

Gridix B recessed traditional /COB LED downlight for general lighting and accent lighting

Multiple sizes, Cardan system system enable flexibility of usage

Antiglare snoot/honey comb louver/frosted diffuser as accessories

Optics : Reflector / Len

Material : Aluminum Frame, heatsink & Steel housing

Applications :

Hotels, Bars, Restaurants, Shopping centers and retail stores, Show room, Gallery, Large architectural structures




References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions	Adjustable
LX-DL-2811	15W	1109lm	2700K/3000K/4000K	12°/24°/48°/62°	IP20	130*130*135mm	350°
	20W	1723lm					
	25W	1969lm					
LX-DL-2812	2*15W	2218lm					
	2*20W	3446lm					
	2*25W	3938lm					
LX-DL-2813	3*15W	3327lm					
	3*20W	5169lm					
	3*25W	5907lm					
						130*340*135mm	

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .


OPTICS

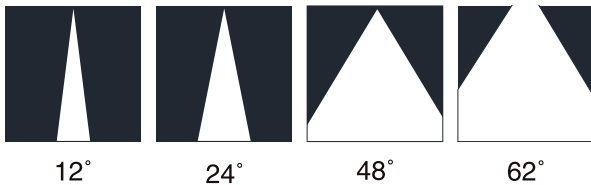


Dimensions




LX-DL-2811



LX-DL-2812



LX-DL-2813

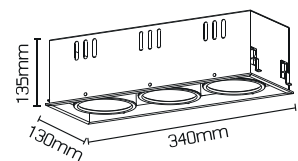

Feature

To Install the Trimmed Version

