

DOWNLIGHT



GRIDIX BL

IP 20	CRI >80/90	AC220V
-----------------	----------------------	---------------



GRIDIX BL

Gridix BL recessed traditional /COB LED downlight for general lighting and accent lighting

Multiple sizes, Cardan system system enable flexibility of usage

Antiglare snoot/honey comb louver/frosted diffuser as accessories

Optics : Reflector / Len

Material : Aluminum Frame, heatsink & Steel housing

Applications :

Hotels, Bars, Restaurants, Shopping centers and retail stores, Show room, Gallery, Large architectural structures



luxio
L I G H T I N G

www.luxio-lighting.com


References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions	Adjustable
LX-DL-2911	25W	2087lm	2700K/3000K/4000K	12°/32°/40°/60°	IP20	166*166*150mm	350°
	30W	2347lm					
	36W	2950lm					
	40W	3322lm					
LX-DL-2912	2*25W	4174lm					
	2*30W	4694lm					
	3*36W	5900lm					
	3*40W	6644lm					
LX-DL-2913	3*25W	6261lm					
	3*30W	7041lm					
	3*36W	8840lm					
	3*40W	9966lm					

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .


OPTICS

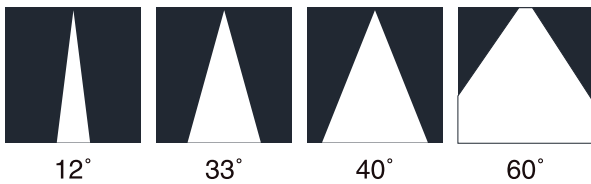


Dimensions




LX-DL-W2911



LX-DL-W2812



LX-DL-W2813

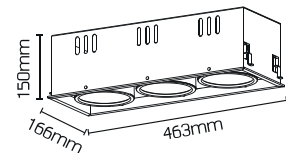

Feature

To Install the Trimmed Version

