


DOWNLIGHT



GRIDIX W

IP 20	CRI >80/90	AC220V
-----------------	----------------------	---------------

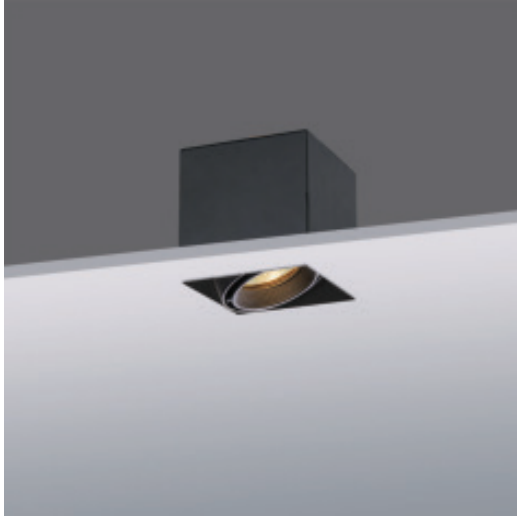

GRIDIX W

Gridix W recessed traditional /COB LED downlight for general lighting and accent lighting

Multiple sizes, Cardan system system enable flexibility of usage

Antiglare snoot/honey comb louver/frosted diffuser as accessories

Optics : Reflector / Len

Material : Aluminum Frame, heatsink & Steel housing

Applications :

Hotels, Bars, Restaurants, Shopping centers and retail stores, Show room, Gallery, Large architectural structures



References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions	Adjustable
LX-DL-W2761	8W	706lm	2700K/3000K/4000K	15°/24°/40°	IP20	94*94*102mm	Yes
	12W	921lm				94*94*118mm	
LX-DL-W2762	2*8W	1412lm				94*190*102mm	
	2*12W	1842lm				94*190*118mm	
LX-DL-W2763	3*8W	2118lm				84*275*102mm	
	3*12W	2763lm				84*275*118mm	

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

OPTICS



Dimensions







LX-DL-W2761



LX-DL-W2762



LX-DL-W2763

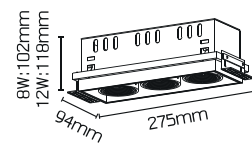

Feature

To Install the Trimless Version

