

DOWNLIGHT



Colours available:



LINE W



Optional



LINE W

The new are with miniaturised optic, providing high visual comfort, uses the physical principle of pinpoints lamps, generating Circular light emission.

Excellent glare control (UGR<19)

Multiple sizes, trimmed/trimless performance available

Optics: Reflector & Len

Material : Aluminum Frame & heatsink

Applications : Showroom, Gallery, Museum, Hotels, Bars, Restaurants, Shopping centers and retail stores Office and administration buildings, Large architectural structures.



luxio
L I G H T I N G

www.luxio-lighting.com

References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions	Adjustable
LX-DL-W11131	10W	699lm	2700K/3000K/4000K	13°/29°/41°/52°/18°*36°	IP20	66*55*135mm	—
LX-DL-W12091	20W	1343lm				66*55*231mm	
LX-DL-W13051	30W	2088lm				66*55*327mm	

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .


OPTICS




Dimensions




LX-DL-W11131









LX-DL-W12091



LX-DL-W13051

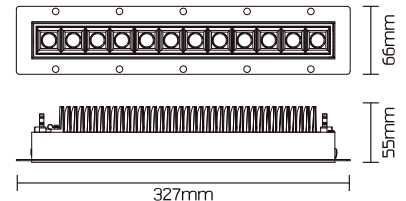

Installation Steps
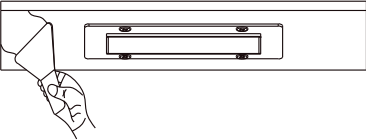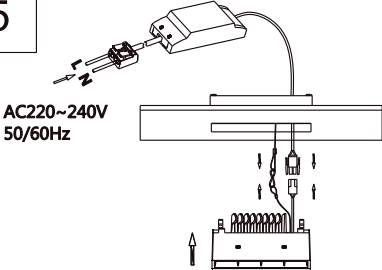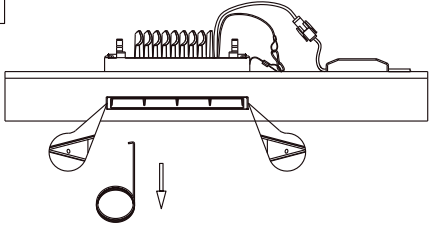
<p>1</p>  <p>Make a cutout in the ceiling suitable for the fitting.</p>	<p>2</p>  <p>Insert the pre-mounted kit to the ceiling, and fasten it by 4 screws.</p>
<p>3</p>  <p>Plaster ceiling to hide screws and pre-mounted kit.</p>	<p>4</p>  <p>Turn off the power switch.</p>
<p>5</p>  <p>AC220~240V 50/60Hz</p> <p>Connect the power wire with the LED power supply, and insert the fitting into the mounted kit, until it locked.</p>	<p>6</p>  <p>Removal or replacement: Use the dismantled device to insert the mini hold on the side, and then pull down carefully.</p>