


DOWNLIGHT




Colours available:

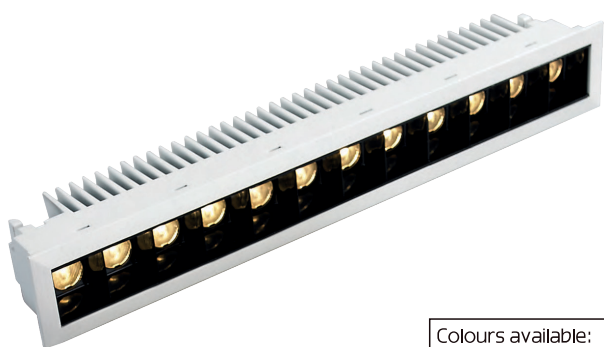

LINE



Optional



LINE

The new are with miniaturised optic, providing high visual comfort, uses the physical principle of pinpoints lamps, generating Circular light emission.

Excellent glare control (UGR<19)

Multiple sizes, trimmed/trimless performance available

Optics: Reflector & Len

Material : Aluminum Frame & heatsink

Applications : Showroom, Gallery, Museum, Hotels, Bars, Restaurants, Shopping centers and retail stores Office and administration buildings, Large architectural structures.



luxio
L I G H T I N G

www.luxio-lighting.com


References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions	Adjustable
LX-DL-11131	10W	699lm	2700K/3000K/4000K	13°/29°/41°/52°/16°*36°	IP20	44*55*113mm	—
LX-DL-12091	20W	1343lm				44*55*209mm	
LX-DL-13051	30W	2088lm				44*55*305mm	

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .


OPTICS

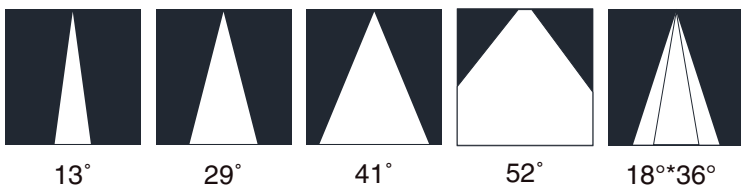


Dimensions



LX-DL-11131



LX-DL-12091

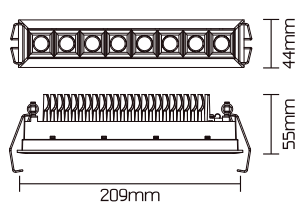

LX-DL-13051

