

DOWNLIGHT



DEEP R



Optional



DEEP R

COB downlight for high-class projects where need comfortable lighting environment

Unique Backward and tilting function allows more lumen output

Chrome reflectors, fixed/adjustable

Excellent glare control (UGR<16) / Material : Aluminum Frame & Heatsink

Applications : Star-rated Hotels, Villa, Residential buildings, etc.



luxio
L I G H T I N G

www.luxio-lighting.com

References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions	Adjustable	
LX-DL-1603	5W	225-308lm	2700K/3000K/4000K	15°/20°/25°/30°	IP20/IP65	Ø60*62mm	—	
	7W	275-369lm						
LX-DL-1863	8W	564-630lm		15°/24°/38°		Ø86*100mm		—
	10W	658-735lm						
	12W	730-813lm						
	15W	832-908lm						
LX-DL-11163	20W	1316-1403lm		15°/24°/38°		Ø116*125mm	—	
	25W	1503-1603lm						
	30W	1661-1772lm						
LX-DL-1604	5W	224-310lm		15°/20°/25°/30°		Ø60*66mm	°20/350°	
	7W	265-366lm						
LX-DL-1864	8W	562-626lm		15°/24°/38°		Ø86*105mm		°20/350°
	10W	658-734lm						
	12W	729-813lm						
	15W	816-910lm						
LX-DL-11164	20W	1339-1421lm		15°/24°/38°		Ø116*133mm		
	25W	1510-1607lm						
	30W	1663-1772lm						

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

OPTICS

LX-DL-1863 / LX-DL-11163
LX-DL-1864 / LX-DL-11164



LX-DL-1603 / LX-DL-1604



Optional Accessories



Honeycomb Louver




Glass filter




www.luxio-lighting.com

Dimensions


LX-DL-1603

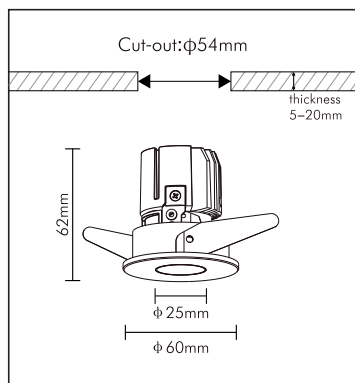


LX-DL-1863

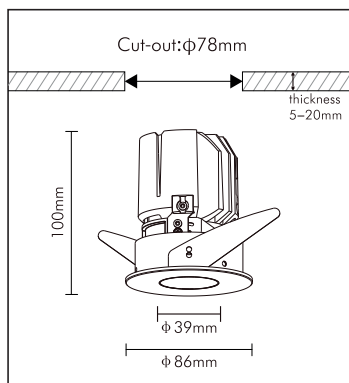


LX-DL-11163

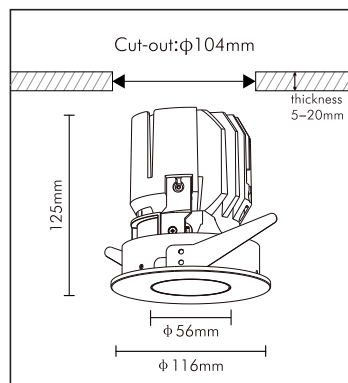


LX-DL-1604

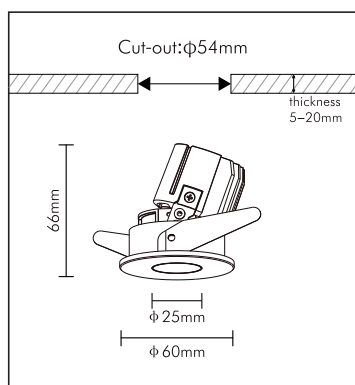

LX-DL-1864

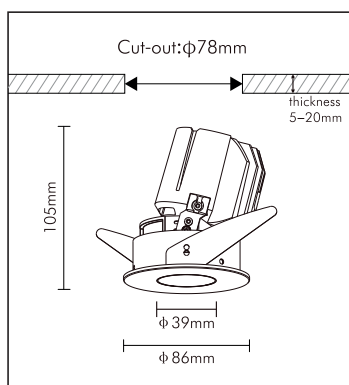

LX-DL-11164

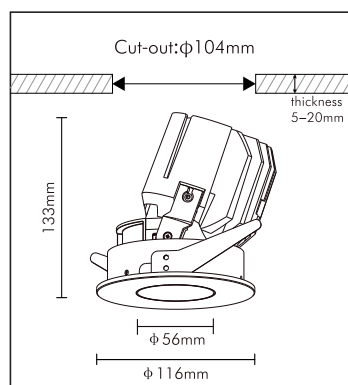

Feature

To install the trimmed version

