

# DOWNLIGHT



## FALLON



### FALLON

Highly adjustable, LED cylinder provides hot-aim, self-locking, tool-less adjustment up to 90° tilt and 350° rotation. Sleek aluminum body and internal heat-sink are precision cast as a single piece. Surface mountable to ceiling as a downlight, or floor as an uplight. Available with a custom junction box that perfectly matches the cylinder profile for a continuous look in surface mount installations.

Die-cast aluminum body with integrated heat-sink

Hot-aim, self-locking, tool-less adjustment



**luxio**  
L I G H T I N G

[www.luxio-lighting.com](http://www.luxio-lighting.com)


## References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions	Adjustable
LX-DL-8606	8W	387-394lm	2700K/3000K/4000K	20°/24°/38°/52°	IP20	(Ø60*90mm)/(16*90mm)	°90/350°
LX-DL-8607	2*8W	756-788lm				(Ø60*90mm)/(16*290mm)	
LX-DL-8608	3*8W	1134-1182lm				(Ø60*90mm)/(16*490mm)	
LX-DL-8609	4*8W	1512-1576lm				(Ø60*90mm)/(16*290mm)	

Order code : Reference - Power - Luminous flux - CCT/K - Optic


Important : All the specification can be customized as per the project request .

## OPTICS

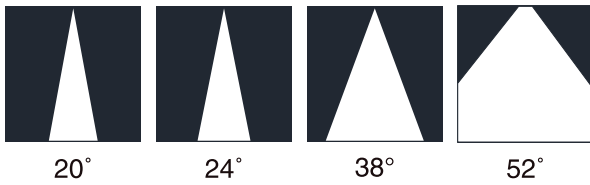


## Dimensions


LX-DL-8606



LX-DL-8607



LX-DL-8608



LX-DL-8609

