


DOWNLIGHT



GLOBE W



Optional



GLOBE W

COB downlight for high-class projects where need comfortable lighting environment
Unique Backward and tilting function allows more lumen output
Chrome reflectors, fixed/adjustable
Excellent glare control (UGR<16) / Material : Aluminum Frame & Heatsink
Applications : Star-rated Hotels, Villa, Residential buildings, etc.



References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions	Adjustable	
LX-DL-W1601	5W	320-390lm	2700K/3000K/4000K	15°/20°/25°/30°	IP20/IP65	Ø78*60mm	—	
	7W	383-468lm						
LX-DL-W1861	8W	642-674lm		15°/24°/38°		Ø110*95mm		
	10W	753-788lm						
	12W	836-872lm						
LX-DL-W11161-S	15W	939-975lm		15°/24°/38°		Ø140*140mm		
	20W	1533-1616lm						
	25W	1742-1833lm						
LX-DL-W1602	30W	1922-2072lm		15°/20°/25°/30°		Ø78*65mm		
	5W	339-392lm						
LX-DL-W1602	7W	402-470lm		15°/24°/38°		Ø110*106mm		°20/350°
	8W	636-666lm						
LX-DL-W1862	10W	746-781lm	15°/24°/38°	Ø110*106mm				
	12W	827-866lm						
	15W	928-970lm						
LX-DL-W11162-S	20W	1339-1421lm	15°/24°/38°	Ø140*147mm				
	25W	1510-1607lm						
	30W	1663-1772lm						

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

OPTICS

LX-DL-W1861 / LX-DL-W11161-S
LX-DL-W1862 / LX-DL-W11162-S



15°

24°

38°

LX-DL-W1601 / LX-DL-W1602



15°

20°

25°

30°

Optional Accessories



Honeycomb Louver



Glass filter



Specular



Black chrome



Gold




White




Black

Dimensions


LX-DL-W1601

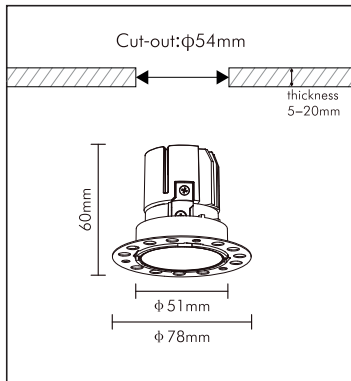


LX-DL-W1861

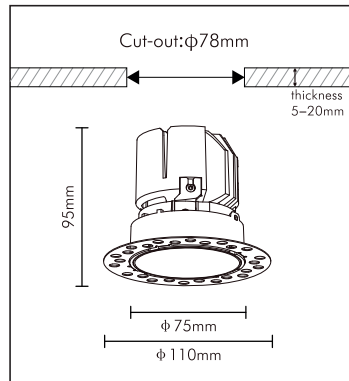


LX-DL-W11161-S

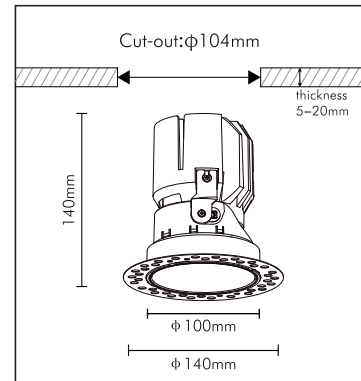


LX-DL-W1602

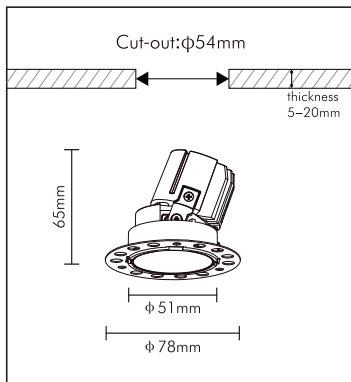

LX-DL-W1862

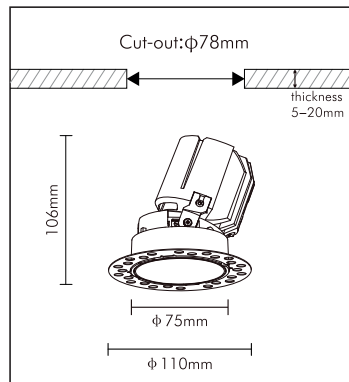

LX-DL-W11162-S

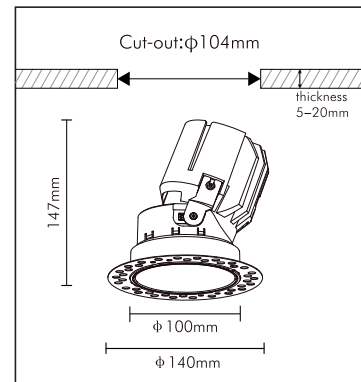

Feature

To install the trimmed version

