


# DOWNLIGHT

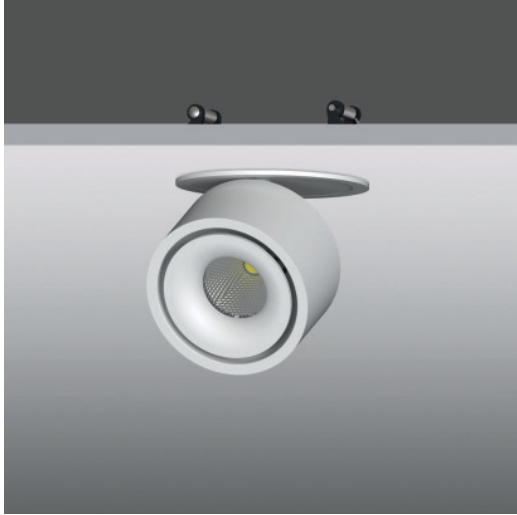

## MERA

<b>IP</b> 20	<b>CRI</b> >80/90	<b>AC220V</b>
-----------------	----------------------	---------------

<b>Anti-Glare</b>	<b>No Flicker</b>	<b>Bluetooth</b>	<b>Optional</b> PHASE	<b>1-10V</b>	<b>DALI</b>
-------------------	-------------------	------------------	--------------------------	--------------	-------------

<b>3</b> GARANTIE	<b>CITILED</b> The Light Engine	<b>CE</b>	<b>RoHS</b>
----------------------	------------------------------------	-----------	-------------

### MERA

Ceiling light, with a minimalist design. The diffuser is a painted aluminium cylinder which provides ample direct and ambient illumination by the adjustable integrated led: head rotatable to 355 degree as also tiltable to 90 degree. Offered in two heights accordingly. The contemporary design as also the high lighting performance makes it suitable for private environments, and for the contract market: offices, shops, restaurants, hotels, museums.



## References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions	Adjustable
LX-DL-2751	7W	18°: 526lm 40°: 517lm	2700K/3000K/4000K	18°/40°	IP20	(Ø75*44mm)*(Ø85mm)	355°/90°
LX-DL-21001	15W	18°: 1119lm 25°: 1086lm 36°: 964lm 60°: 948lm		18°/25°/36°/60°		(Ø100*45mm)/(Ø100mm)	
LX-DL-8751	7W	18°: 526lm 40°: 517lm		18°/40°		(Ø75*44mm)/(Ø75*44mm)	
LX-DL-81001	15W	18°: 1119lm 25°: 1086lm 36°: 964lm 60°: 948lm		18°/25°/36°/60°		(Ø100*45mm)/(Ø100*45mm)	

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

## OPTICS

LX-DL-2751/LX-DL-8751



18° 40°


LX-DL-21001/LX-DL-81001




18° 25° 36° 60°

## Dimensions


LX-DL-2751



LX-DL-21001



LX-DL-8751



LX-DL-81001

