


# MAGNETIC TRACK LIGHT



## Wall Washer light

IP 20	CRI >80/90	DC48V
----------	---------------	-------

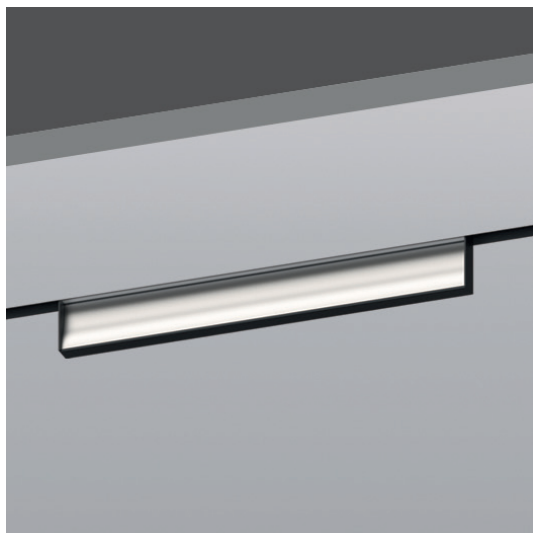

### Linear Opal light

Mainly used for uniform, forming a certain diffuse reflection under the sense of space, product lighting characteristics:

Optical design is mainly to illuminate (vertical) facade with uniform spot. Fully realize the lighting demand of one lamp and one wall.

Material : Aluminum



**luxio**  
L I G H T I N G

[www.luxio-lighting.com](http://www.luxio-lighting.com)


## References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions	Adjustable
LX-DL-G253	15W	796Lm	2700K/3000K/4000K	38°*130°	IP20	120*25*500mm	—


Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .


## Optics



## Illumination

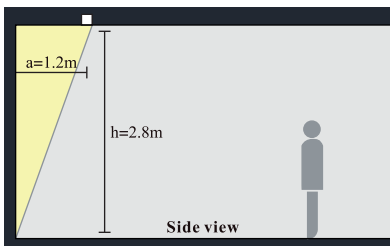

In order to obtain uniform longitudinal illumination,  
The distance between the wall lamp (d) can be 1.2  
times of the distance between the lamp and the wall (a).  
Distance :  $d < 1.2xa$   
The optimum distance between wall lamp and wall and  
between lamps and lanterns is shown in the right figure.

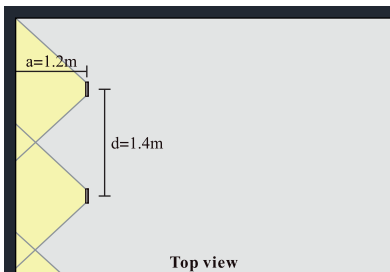

In order to obtain uniform vertical illumination,  
The distance between the wall lamp and the wall (a)  
should be about three seventh of the wall height (h).  
Distance :  $a = 3/7 \times H$

## Dimensions

