

# GARDEN LIGHT



AVA

IP	IK	CRI	AC220-240V
66	08	70/80	



#### Garden Light

Various light distributions for walkway lighting


Lens made from PMMA

Current feed: 200 mA–700 mA, depending on ambient temperature

Housing made of aluminum

Pole made of extruded aluminum profile

Finish: polyester powder coating, black (RAL 9005), other colours upon request

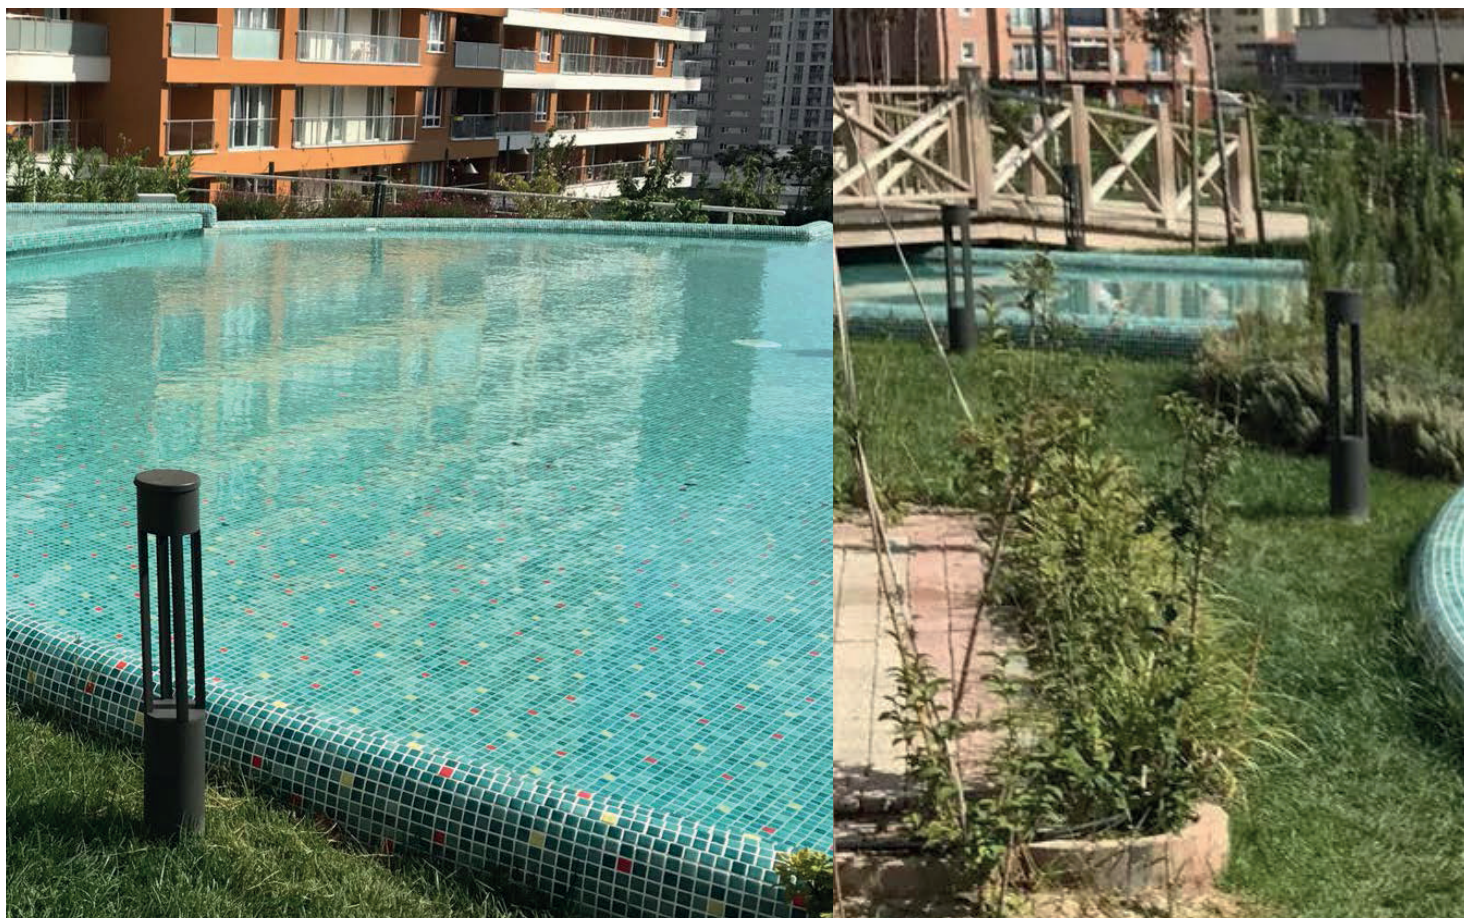

**luxio**  
L I G H T I N G

[www.luxio-lighting.com](http://www.luxio-lighting.com)

## References

Reference	Led Power	Input Voltage	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions
LX-G-AVA	5W	AC220-240V	3000K : 600lm 4000K : 650lm	3000K/4000K	—	IP66	(H300/H800mm)*(Ø125mm)
	7W		3000K : 840lm 4000K : 900lm				(H400/H1000mm)*(Ø125mm)
	9W		3000K : 1000lm 4000K : 1180lm				(H500/H1500mm)*(Ø125mm)

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

## Mounting hole

