

luxio
L I G H T I N G

INDOOR

luxio

L I G H T I N G



DOWNLIGHT

CORNE DOWNLIGHT



P01
CORN RW / CORN R
LX-DL-11011-2
LX-DL-11361-2
LX-DL-W11011-2
LX-DL-W11361-2



P02
CORN RW / CORN R
LX-DL-11012-2
LX-DL-11362-2
LX-DL-W11012-2
LX-DL-W11362-2



P03
CORN SW / CORN S
LX-DL-11014-2
LX-DL-11364-2
LX-DL-W11014-2
LX-DL-W11364-2



P04
CORN SW / CORN S
LX-DL-11015-2
LX-DL-11365-2
LX-DL-W11015-2
LX-DL-W11365-2



P20
JUPITER
LX-DL-12055F
LX-DL-12065F
LX-DL-12075F
LX-DL-12095F



P21
BAT
LX-DL-5360F
LX-DL-5480F
LX-DL-55120F
LX-DL-56160F



P22
THINY
LX-DL-5255A
LX-DL-5375A
LX-DL-5495A
LX-DL-55125A



P25
GLOBE
LX-DL-1601
LX-DL-1861
LX-DL-11161-S



P05
COMET FLAT
LX-DL-04035F
LX-DL-04045A
LX-DL-04055F
LX-DL-04065A



P08
COMET CURVE
LX-DL-04035FH
LX-DL-04055FH



P08
COMET ROUND
LX-DL-04045FX
LX-DL-04080AX



P08
COMET SQUARE
LX-DL-04070FSZ
LX-DL-04070FSX
LX-DL-04080ASX



P25
GLOBE
LX-DL-1602
LX-DL-1862
LX-DL-11162-S



P27
GLOBE W
LX-DL-W1601
LX-DL-W1861
LX-DL-W11161-S



P27
GLOBE W
LX-DL-W1602
LX-DL-W1862
LX-DL-W11162-S



P29
DEEP R
LX-DL-1603
LX-DL-1863
LX-DL-11163

HOTEL SERIES DOWNLIGHT



P09
CURVE
LX-DL-13070A
LX-DL-13095A
LX-DL-13125A



P11
BRUCE
LX-DL-07055A
LX-DL-08075A



P14
ATHENA S / ATHENA SW
LX-DL-01075AS
LX-DL-W01075AST
LX-DL-01075FS
LX-DL-01075FST



P15
ATHENA R / ATHENA RW
LX-DL-01075A
LX-DL-W01075AT
LX-DL-01075F
LX-DL-W01075FT



P29
DEEP R
LX-DL-1604
LX-DL-1864
LX-DL-11164



P31
DEEP F
LX-DL-1606
LX-DL-1867
LX-DL-11165-S



P31
DEEP FW
LX-DL-W1606
LX-DL-W1867
LX-DL-W11165-S



P33
INFINITY S
LX-DL-1641



P16
ATHENA RL
LX-DL-05105F
LX-DL-05105A
LX-DL-06150F
LX-DL-06150A



P17
NEPTUNE
LX-DL-01070F-N
LX-DL-01070F-T
LX-DL-01070F-W



P18
TRITON
LX-DL-7475F
LX-DL-74105F
LX-DL-76125F
LX-DL-77160F



P19
NEVADA
LX-DL-11075F
LX-DL-11090F
LX-DL-11115F



P33
INFINITY SF
LX-DL-1642



P34
INFINITY R
LX-DL-1643



P34
INFINITY RF
LX-DL-1644



P35
INFINITY S
LX-DL-11221
LX-DL-11691



P35
INFINITY SW
LX-DL-W11221
LX-DL-W11691




P36
INFINITY SF
LX-DL-11222
LX-DL-11692



P36
INFINITY SFW
LX-DL-W11222
LX-DL-W11692



P41
TWINKLESTAR M
LX-DL-1231
LX-DL-1232
LX-DL-1351
LX-DL-1352



P50
NEBULE SQUARE
LX-DL-08060AS
LX-DL-08075AS
LX-DL-08090AS



P52
NEBULE GRILLE
LX-DL-08260AS
LX-DL-08275AS
LX-DL-08290AS



P52
NEBULE GRILLE
LX-DL-08360AS
LX-DL-08375AS
LX-DL-08390AS



P54
CUBIST
LX-DL-18035FS
LX-DL-18065FS
LX-DL-18095FS
LX-DL-18155FS
LX-DL-18065FST
LX-DL-18095FS



P41
TWINKLESTAR L
LX-DL-1231-3
LX-DL-1231-5
LX-DL-1351-3
LX-DL-1351-5



P43
TWINKLESTAR R
LX-DL-1231-12
LX-DL-1231-24



P45
ASTRO
LX-DL-1902
LX-DL-1802
LX-DL-1922
LX-DL-1941



P46
VEGA
LX-DL-017



P54
CUBIST ROUND
LX-DL-18035F
LX-DL-18050F
LX-DL-18055F
LX-DL-18075F



P55
PEGASUS
LX-DL-09050FS
LX-DL-09250FS
LX-DL-09350FS
LX-DL-09450FL
LX-DL-09450FS



P56
ARRAY
LX-DL-15040F
LX-DL-15100F
LX-DL-15160F
LX-DL-15310F
LX-DL-15070FS
LX-DL-15100FS



P59
CASTELO
LX-DL-1731
LX-DL-1971
LX-DL-11151



P46
VEGA W
LX-DL-W017



P46
VEGA
LX-DL-018



P46
VEGA W
LX-DL-W018



P47
ORION
LX-DL-10075A
LX-DL-10095A



P59
CASTELO
LX-DL-1591
LX-DL-1821
LX-DL-11009



P61
TIBERI
LX-DL-44065F
LX-DL-45090F
LX-DL-46115F
LX-DL-47160F
LX-DL-48195F



P65
GRACE / GRACE W
LX-DL-83100F
LX-DL-84150F
LX-DL-W83100FT
LX-DL-W84150FT



P67
MINIDO
LX-DL-1392



P47
ORION
LX-DL-10075AS
LX-DL-10095AS



P48
ORION
LX-DL-10275AS
LX-DL-10295AS



P48
ORION
LX-DL-10375AS



P49
NEBULE ROUND
LX-DL-J08060A
LX-DL-J08075A
LX-DL-J08090A




P67
MINIDO
LX-DL-1394



P67
MINIDO
LX-DL-1401



P69
LOCUS
LX-DL-05050F



P69
LOCUS
LX-DL-W05050T



P70
PASCAL II
LX-DL-17070F
LX-DL-17095F
LX-DL-17105F
LX-DL-17150F
LX-DL-17165F
LX-DL-17190F



P72
AIPHA
LX-DL-25125F
LX-DL-25125L



P73
JAZZ
LX-DL-1931
LX-DL-1934
LX-DL-11171



P74
LASER
LX-DL-01075W
LX-DL-W01075WT



P74
LASER
LX-DL-01075WS
LX-DL-W01075WST



P75
LINE
LX-DL-1651
LX-DL-11131
LX-DL-12091
LX-DL-13051



P76
LINE W
LX-DL-W1651
LX-DL-W11131
LX-DL-W12091
LX-DL-13051



P77
SNIPER
LX-DL-1653
LX-DL-11133
LX-DL-12093
LX-DL-13053



P81
STAR LINE
LX-DL-1711
LX-DL-11111
LX-DL-12111



P81
STAR LINE W
LX-DL-W1711
LX-DL-W11111
LX-DL-W12111



P84
STAR LINE B
LX-DL-1782
LX-DL-11181
LX-DL-12181



P85
GRIDIX
LX-DL-2161



P85
GRIDIX
LX-DL-2162



P85
GRIDIX
LX-DL-2163



P86
GRIDIX W
LX-DL-W2161



P86
GRIDIX W
LX-DL-W2162



P86
GRIDIX W
LX-DL-W2163



P87
GRIDIX A
LX-DL-2261



P87
GRIDIX A
LX-DL-2262



P87
GRIDIX A
LX-DL-2263



P88
GRIDIX AW
LX-DL-W2261



P88
GRIDIX AW
LX-DL-W2262



P88
GRIDIX AW
LX-DL-W2263



P89
GRIDIX B / GRIDIX BL
LX-DL-2811
LX-DL-2911



P90
GRIDIX B / GRIDIX BL
LX-DL-2812
LX-DL-2912



P90
GRIDIX B / GRIDIX BL
LX-DL-2813
LX-DL-2913



P89
GRIDIX BW
LX-DL-W2811



P90
GRIDIX BW
LX-DL-W2812



P90
GRIDIX BW
LX-DL-W2813



P92
GRIDIX C
LX-DL-2921
LX-DL-21301



P93
GRIDIX C
LX-DL-2922
LX-DL-21302



P103
SPOTLIGHT
LX-DL-2502
LX-DL-2702



P105
RADAR S
LX-DL-2351
LX-DL-2353
LX-DL-2352
LX-DL-2505



P106
RADAR L
LX-DL-8352
LX-DL-8353
LX-DL-8502



P108
SPY
LX-DL-2675A
LX-DL-2690A
LX-DL-26105A



P96
GRIDIX C
LX-DL-2923
LX-DL-21303



P92
GRIDIX CW
LX-DL-W2921
LX-DL-W21301



P93
GRIDIX CW
LX-DL-W2922
LX-DL-W21302



P96
GRIDIX CW
LX-DL-W2923
LX-DL-W21303



P108
SPY W
LX-DL-W2675AT
LX-DL-W2690AT
LX-DL-W26105AT



P108
SPY
LX-DL-27110A
LX-DL-26135A
LX-DL-25165A



P108
SPY W
LX-DL-W27110AT
LX-DL-W26135AT
LX-DL-W25165AT



P109
TECO
LX-DL-2550A
LX-DL-2560A
LX-DL-2575A



P97
ZOOM
LX-DL-11051



P99
SMART
LX-DL-2090A
LX-DL-21120A



P99
SMART
LX-DL-2090AS
LX-DL-21120AS



P99
SMART
LX-DL-20175AS
LX-DL-21230AS



P111
POLY R
LX-DL-2240A
LX-DL-2340A
LX-DL-2440A



P115
POLY
LX-DL-0203A
LX-DL-0207A
LX-DL-0218A



P115
POLY B
LX-DL-0603A
LX-DL-0607A
LX-DL-0618A



P116
MEGA
LX-DL-0407A
LX-DL-0418A



P99
SMART
LX-DL-20260AS
LX-DL-21335AS



P101
FALLON
LX-DL-8606
LX-DL-8607
LX-DL-8608
LX-DL-8609



P101
MIGNON L
LX-DL-8603
LX-DL-8604
LX-DL-8605



P102
MIGNON P
LX-DL-8602
LX-DL-2602



P116
MEGA
LX-DL-0514A
LX-DL-0536A



P117
MONTI
LX-DL-8501
LX-DL-8601
LX-DL-8701



P118
MERA
LX-DL-2751
LX-DL-8751
LX-DL-21001
LX-DL-81001



P119
TUBE R
LX-DL-8901
LX-DL-8906
LX-DL-81241
LX-DL-81243



P121
TUBE S
LX-DL-8902
LX-DL-8905
LX-DL-81242
LX-DL-81244



P123
TUBE R-IP65
LX-DL-89010
LX-DL-81245



P123
TUBE S-IP65
LX-DL-8909
LX-DL-81246



P125
HUBBLE
LX-DL-14082F
LX-DL-14115F
LX-DL-14150F
LX-DL-14190F



P135
DOBSON-T
LX-DL-16065A
LX-DL-16075A
LX-DL-16085A



P137
DOBSON-T
LX-DL-16065C
LX-DL-16075C
LX-DL-16085C



P137
DOBSON-T
LX-DL-16065B
LX-DL-16075B
LX-DL-16085B



P139
DOBSON-T6
LX-DL-21045
LX-DL-21055
LX-DL-21065
LX-DL-21075



P128
LYRA
LX-DL-15082FS
LX-DL-15120FS



P129
FOCUS
LX-DL-2503



P130
FOCUS
LX-DL-2703



P131
DOBSON
LX-PEN-25062
LX-PEN-25072
LX-PEN-25080



P141
DOBSON-TS
LX-DL-20062A
LX-DL-20072A
LX-DL-20080A



P142
DOBSON-TS
LX-DL-20062B
LX-DL-20072B
LX-DL-20080B



P143
RADAR T
LX-DL-3351
LX-DL-3353
LX-DL-3352
LX-DL-3354



P144
INNOVATIVE
LX-DL-3501
LX-DL-3702



P134
DOBSON
LX-DL-23075A
LX-DL-23095AM
LX-DL-23095AL



P134
DOBSON
LX-DL-24062A
LX-DL-24072A
LX-DL-24080A

M-LINE 60 SERIES



P147
LX-DL-M60FD
LX-DL-M60FP



P147
LX-DL-M60GX



P149
LX-DL-M60BD



P149
LX-DL-M60LA
LX-DL-M60LS



P151
LX-DL-M60SF-35RB



P151
LX-DL-M60SE-55WA



P151
LX-DL-M60SF-55WB

MAGNETO SERIES



P160
RUSS B
LX-DL-2015



P160
RUSS S
LX-DL-2016



P160
RUSS C
LX-DL-2014



P160
RUSS M
LX-DL-2017



P160
SENTO
LX-DL-2019



P160
SENTO
LX-DL-2030



P160
LINE
LX-DL-2011B
LX-DL-2025B



P160
ROIN
LX-DL-2026
LX-DL-2029



P160
SQON
LX-DL-2012



P161
BRET S
LX-DL-2027



P161
BRET S
LX-DL-2028



P161
BRET L
LX-DL-2013



P161
BRET L
LX-DL-2031



P161
BRET X
LX-DL-2020



P162
SQAD R
LX-DL-2018



P162
SQAD S
LX-DL-2022



P162
ROAD
LX-DL-2023



P162
FLOD
LX-DL-2024

GALAXY SERIES



P171
LINEAR OPAL LIGHT
LX-DL-G252



P171
LINEAR DOT LIGHT
LX-DL-G251



P171
WALL WASHER LIGHT
LX-DL-G253



P173
MAGNETIC SPOTLIGHT R/S
LX-DL-G201
LX-DL-G203



P173
MAGNETIC SPOTLIGHT R/S
LX-DL-G202
LX-DL-G204



P173
MAGNETIC SPOTLIGHT R/S
LX-DL-G205
LX-DL-G206



P174
MAGNETIC SPOTLIGHT
LX-DL-G351



P174
MAGNETIC SPOTLIGHT
LX-DL-G353



P174
MAGNETIC SPOTLIGHT
LX-DL-G358



P174
MAGNETIC SPOTLIGHT
LX-DL-G3510



P174
MAGNETIC SPOTLIGHT
LX-DL-G501



P175
MAGNETIC PENDANT LIGHT
LX-DL-G355
LX-DL-G503



P175
MAGNETIC DECORATIVE LIGHT
LX-DL-G751



P175
MAGNETIC SPOTLIGHT
LX-DL-G352



P175
MAGNETIC SPOTLIGHT
LX-DL-G354



P175
MAGNETIC SPOTLIGHT
LX-DL-G357




P175
MAGNETIC SPOTLIGHT
LX-DL-G359




P175
MAGNETIC SPOTLIGHT
LX-DL-G356

TL-R SERIES



P179
LX-DL-R25FD




P179
LX-DL-R25FP




P172
LX-DL-R25G



P179
LX-DL-R25KD




P179
LX-DL-R25LA



P179
LX-DL-R25LS



P182
LX-DL-RNR30NK



P182
LX-DL-RNR30MK



P182
LX-DL-RNR30NJ



P182
LX-DL-RNR30MJ

PROFIL LIGHT



P184
LX-PL-LR0812



P184
LX-PL-LR1613



P184
LX-PL-LR2013



P184
LX-PL-LR3924



P184
LX-PL-LR10324




P185
LX-PL-LS0709



P185
LX-PL-LS0812



P185
LX-PL-LS1607



P186
LX-PL-LS1613



P186
LX-PL-LS2013



P186
LX-PL-LS2020



P187
LX-PL-LE1212



P187
LX-PL-LE2507



P188
LX-PL-LE2513



P188
LX-PL-LR3735



P190
LX-PL-LG7043



P197
LX-PL-LG3030K



P200
LX-PL-LE1616



P200
LX-PL-LR1616



P200
LX-PL-LR3840A



P190
LX-PL-LG7070



P192
LX-PL-LS2126



P192
LX-PL-LE2711




P192
LX-PL-LS0510



P200
LX-PL-LR3840B



P200
LX-PL-LR3943



P202
LX-PL-LE2409



P202
LX-PL-LS1612L



P194
LX-PL-SK6013A



P194
LX-PL-SK6013B



P194
LX-PL-SK10032



P196
LX-PL-LG2323



P202
LX-PL-LS1911K



P202
LX-PL-LS1911C



P209
LX-PL-LS5470(F)



P209
LX-PL-LS7977



P196
LX-PL-LG2727



P197
LX-PL-LG1616C



P197
LX-PL-LG1616K



P197
LX-PL-LG3030C



P209
LX-PL-LS3360



P209
LX-PL-LS4067



P210
LX-PL-LT60



P211
LX-PL-LE5535



P211
LX-PL-LE6935(F)



P211
LX-PL-LR5535(A)



P211
LX-PL-LR5535(B)



P211
LX-PL-LE9435



P226
LX-PL-AH5060-2500



P226
LX-PL-AH5060-15N90



P226
LX-PL-AH5060-15W90



P228
LX-PL-AS3535-08A360
LX-PL-AS3535-15A360



P221
LX-PL-AS3535-03A90



P221
LX-PL-AS3535-03N90



P221
LX-PL-AS3535-03W90



P222
LX-PL-AS3535-04T90L



P228
LX-PL-AS3535-15N360



P228
LX-PL-AS3535-15W360



P235
LX-NF-SKY



P222
LX-PL-AS3535-04T90R



P222
LX-PL-AS3535-05T180



P223
LX-PL-AS3535-2500



P223
LX-PL-AS3535-08A45-90
LX-PL-AS3535-15A45-90



P224
LX-PL-AS3535-30A45



P224
LX-PL-AS3535-15N90




P224
LX-PL-AS3535-15W90



P225
LX-PL-AH5060-10A45-90
LX-PL-AH5060-15A45-90
LX-PL-AH5060-30A45

CORNE DOWNLIGHT

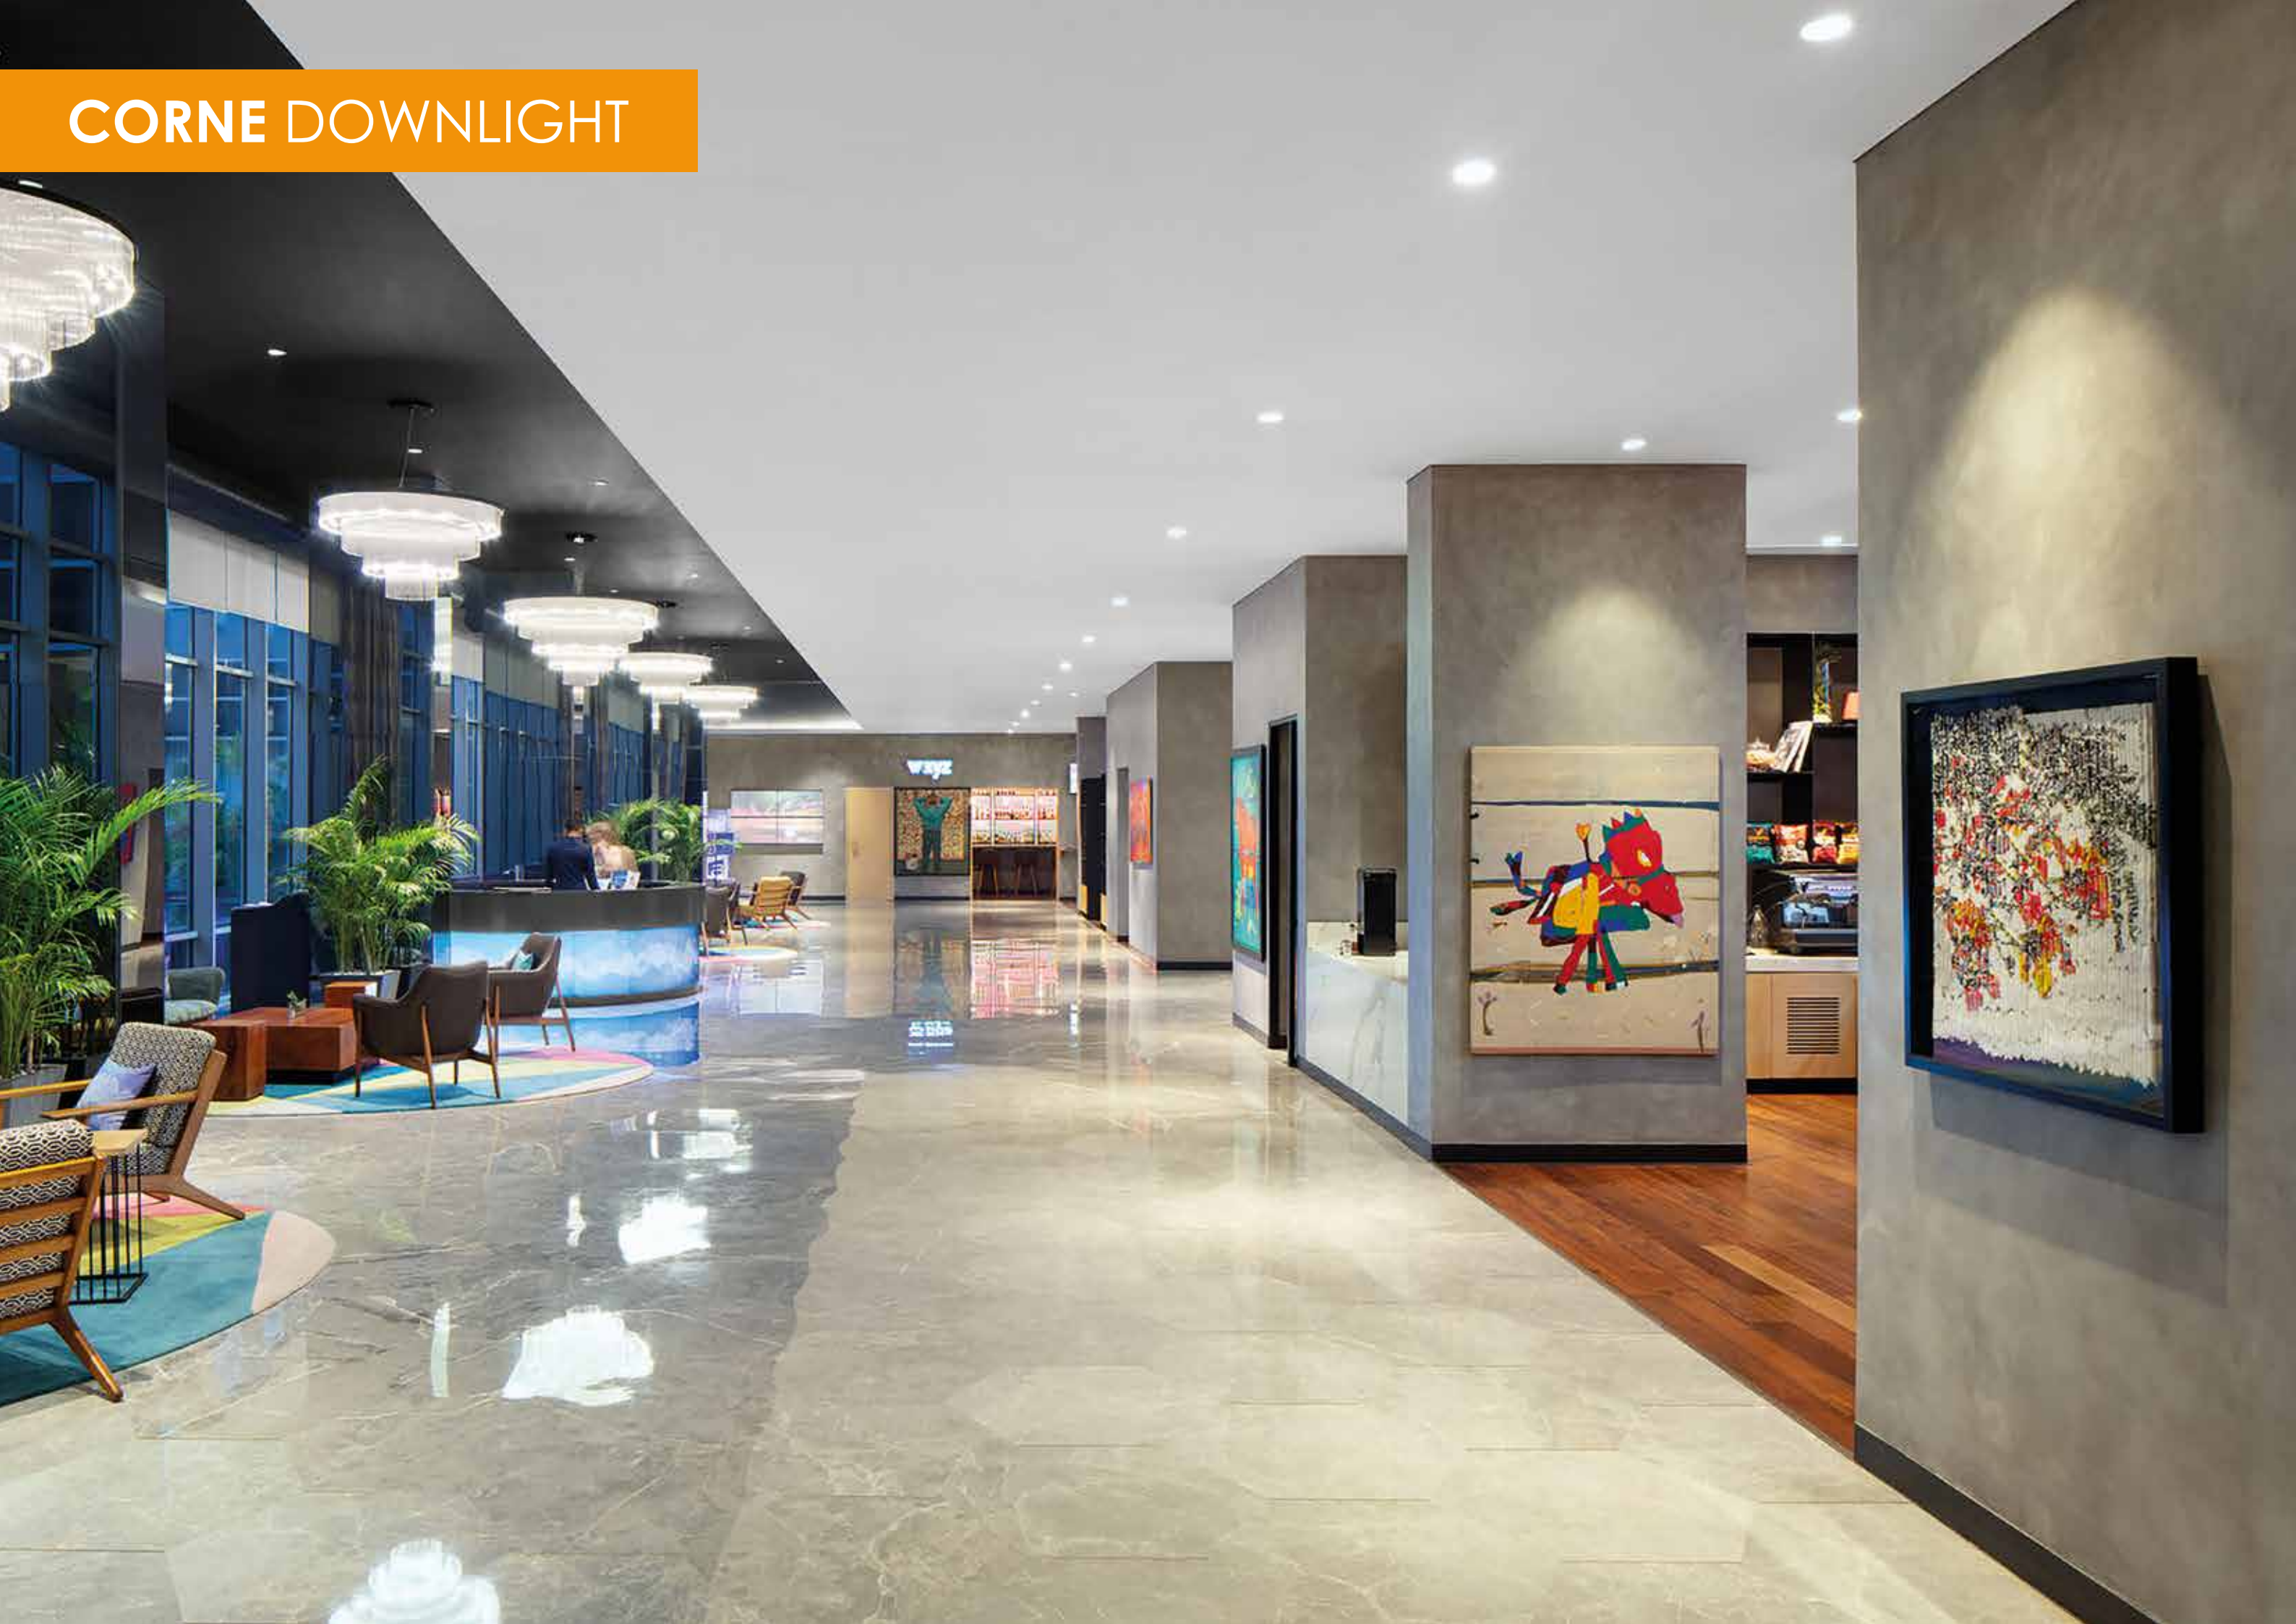



CORN RW

CORN R










	LX-DL-11011-2 / LX-DL-W11011-2			LX-DL-11361-2 / LX-DL-W11361-2				
	8W	12W	15W	15W	20W	25W	30W	36W
	2700K:605-792lm 3000K:638-812lm	2700K:836-1010lm 3000K:924-1047lm	2700K:998-1108lm 3000K:1048-1147lm	2700K:1029-1358lm 3000K:1064-1387lm	2700K:1407-1839lm 3000K:1633-1880lm	2700K:1654-2167lm 3000K:1883-2213lm	2700K:1905-2421lm 3000K:2104-2517lm	2700K:2277-2540lm 3000K:2522-2831lm
	220-240VAC 50/60Hz							
	Citizen							
	2700K/3000K/4000K/5000K							
Ra	≥90							
	15°/24°/38°/60°/15°x40°			15°(exc.36W)/24°/38°/60°/ 15°x40°(exc.36W)				
	Remote electronic power supply							
	PHASE /1-10V / DALI as options							
	LX-DL-W11011-2 Cut-out:φ94mm thickness 5-20mm 114mm φ88mm			LX-DL-11011-2 Cut-out:φ90mm thickness 5-20mm 114mm φ101mm				
	LX-DL-W11361-2 Cut-out:φ125mm thickness 5-20mm 145mm φ123mm			LX-DL-11361-2 Cut-out:φ125mm thickness 5-20mm 145mm φ136mm				

CORN RW

CORN R



LX-DL-11012-2 / LX-DL-W11012-2				LX-DL-11362-2 / LX-DL-W11362-2				
	8W	12W	15W	15W	20W	25W	30W	36W
	2700K:637-792lm 3000K:658-812lm	2700K:872-1010lm 3000K:910-1047lm	2700K:985-1093lm 3000K:1005-1147lm	2700K:1026-1358lm 3000K:1056-1387lm	2700K:1544-1839lm 3000K:1617-1880lm	2700K:1824-2167lm 3000K:1869-2213lm	2700K:2083-2421lm 3000K:2099-2517lm	2700K:2277-2540lm 3000K:2522-2831lm
	220-240VAC 50/60Hz							
	Citizen							
	2700K/3000K/4000K/5000K							
Ra	≥90							
	15°/24°/38°/60°/15°x40°			15°(exc.36W)/24°/38°/60°/ 15°x40°(exc.36W)				
	Remote electronic power supply							
	PHASE /1-10V / DALI as options							
	LX-DL-W11012-2 Cut-out:φ94mm  thickness 5-20mm  105mm φ88mm			LX-DL-11012-2 Cut-out:φ90mm  thickness 5-20mm  105mm φ101mm				
	LX-DL-W11362-2 Cut-out:φ125mm  thickness 5-20mm  140mm φ123mm				LX-DL-11362-2 Cut-out:φ125mm  thickness 5-20mm  130mm φ136mm			
IP20								





CORN SW CORN S



	LX-DL-11014-2 / LX-DL-W11014-2			LX-DL-11364-2 / LX-DL-W11364-2						
⚡	8W	12W	15W	15W	20W	25W	30W	36W		
💡	2700K:604-745lm 3000K:645-754lm	2700K:846-947lm 3000K:903-986lm	2700K:980-1098lm 3000K:985-1107lm	2700K:1024-1147lm 3000K:1064-1163lm	2700K:1497-1557lm 3000K:1634-1792lm	2700K:1765-1834lm 3000K:1892-2067lm	2700K:2033-2110lm 3000K:2113-2296lm	2700K:2476-2801lm 3000K:2524-2830lm		
🔌	220-240VAC 50/60Hz									
🌞	Citizen									
🌈	2700K/3000K/4000K/5000K									
Ra	≥90									
🔦	15°/24°/38°/60°			15°(exc.36W)/24°/38°/60°						
🔌	Remote electronic power supply									
🕒	PHASE /1-10V / DALI as options									
	LX-DL-W11014-2 Cut-out:90x90mm thickness 5-20mm 115mm 88mm 68mm			LX-DL-11014-2 Cut-out:90x90mm thickness 5-20mm 115mm 101mm 101mm						
	LX-DL-W11014-2 Cut-out:90x90mm thickness 5-20mm 115mm 88mm 68mm			LX-DL-W11364-2 Cut-out:125x125mm thickness 5-20mm 145mm 123mm 123mm					LX-DL-11364-2 Cut-out:125x125mm thickness 5-20mm 145mm 136mm 136mm	
IP20										







	LX-DL-11015-2 / LX-DL-W11015-2			LX-DL-11365-2 / LX-DL-W11365-2				
⚡	8W	12W	15W	15W	20W	25W	30W	36W
💡	2700K:587-663lm 3000K:654-756lm	2700K:831-942lm 3000K:904-991lm	2700K:968-1099lm 3000K:1018-1111lm	2700K:1047-1138lm 3000K:1062-1165lm	2700K:1388-1516lm 3000K:1654-1772lm	2700K:1640-806lm 3000K:1883-2043lm	2700K:1879-2058lm 3000K:2093-2292lm	2700K:2411-2759lm 3000K:2524-2830lm
🔌	220-240VAC 50/60Hz							
🌞	Citizen							
🌈	2700K/3000K/4000K/5000K							
Ra	≥90							
🔦	15°/24°/38°/60°			15°(exc.36W)/24°/38°/60°				
🔌	Remote electronic power supply							
🕒	PHASE /1-10V / DALI as options							
📏	LX-DL-W11015-2 Cut-out:90x90mm thickness 5-20mm 110mm 88mm 60mm			LX-DL-11015-2 Cut-out:90x90mm thickness 5-20mm 110mm 101mm 101mm				
	LX-DL-W11015-2 Cut-out:90x90mm thickness 5-20mm 110mm 88mm 60mm			LX-DL-W11365-2 Cut-out:125x125mm thickness 5-20mm 145mm 123mm 123mm				
	LX-DL-W11015-2 Cut-out:90x90mm thickness 5-20mm 110mm 88mm 60mm			LX-DL-11365-2 Cut-out:125x125mm thickness 5-20mm 167mm 136mm 136mm				
IP20								



COMET FLAT



				
	LX-DL-04035F	LX-DL-04045A	LX-DL-04055F	LX-DL-04065A
	5W		15W	
	425Lm		1500Lm	
	220-240VAC 50/60Hz			
	BRIDGELUX			
	2700K/3000K/4000K			
Ra	≥90			
	17°/36°		18°/24°/36°	
	Remote electronic power supply			
	PHASE/0/1-10V /DALI as options			
				





DELICATE

Using a curved rear dissipator reduces the recess depth and allows the Comet range of products versions to adapt to the installation on dropped ceilings with height lesser than 10 cm.

HOTEL SERIES DOWNLIGHT





CURVE

	LX-DL-13070A	LX-DL-13095A	LX-DL-13125A
⚡	10W	18W	30W
💡	800Lm	1440Lm	2400Lm
🔌	220-240VAC 50/60Hz		
☀️	CREE COB		
🌈	2700K/3000K/4000K		
Ra	≥90		
📏	15°/24°/36°		
🔌	Remote electronic power supply		
🔄	PHASE/0/1-10V /DALI as options		
📏			
IP20			





BRUCE

	LX-DL-07055A	LX-DL-08075A
⚡	7W	12W
💡	525Lm	840Lm
🔌	220-240VAC 50/60Hz	
🌞	Luminus COB	
🌈	2700K/3000K/4000K	
Ra	≥90	
🔆	15°/24°/36°/50°	
🔌	Remote electronic power supply	
🔄	PHASE/0/1-10V /DALI as options	
📏		
IP20		





White Grey Wine Black

Self-contained LED engine in four colours with industrial design

Filter





Optional accessories give the design flexibility in combination of different luminaires.
Anti-glare sleeve achieves cut-off angle>40°,UGR<6.
The lighting tool for perfectly glare-free light from ceiling.



ATHENA S / ATHENA SW

REFLECTOR'S COLOR



	LX-DL-01075AS	LX-DL-W01075AST	LX-DL-01075FS	LX-DL-W01075FST
⚡	9W/12W			
💡	630Lm/840Lm			
🔌	220-240VAC 50/60Hz			
🌞	Luminus COB			
🌈	2700K / 3000K / 3500K / 4000K			
Ra	≥90			
📐	15° / 24° / 36° / 50°			
🔧	Remote electronic power supply			
📶	PHASE/0/1-10V /DALI as options			
📏				
				
IP65				





ATHENA R / ATHENA RW







	LX-DL-01075A	LX-DL-W01075AT	LX-DL-01075F	LX-DL-W01075FT
⚡	9W/12W			
💡	630Lm/840Lm			
🔌	220-240VAC 50/60Hz			
🌞	Luminus COB			
🌈	2700K / 3000K / 3500K / 4000K			
Ra	≥90			
📐	15° / 24° / 36° / 50°			
🔌	Remote electronic power supply			
📷	PHASE/0/1-10V /DALI as options			
📏				
🖼️				
IP65				




ATHENA RL



	LX-DL-05105F	LX-DL-05105A	LX-DL-06150F	LX-DL-06150A
⚡	20W/25W		35W/40W	
💡	1500Lm/2000Lm		2975Lm/3200Lm	
🔌	220-240VAC 50/60Hz			
🌞	Cree COB			
🌈	2700K / 3000K / 3500K / 4000K			
Ra	≥90			
📐	15° / 24° / 36° / 50°			
🔌	Remote electronic power supply			
🔄	PHASE/0/1-10V /DALI as options			
📏				
				
IP65				

One design for fixed or adjustable performance

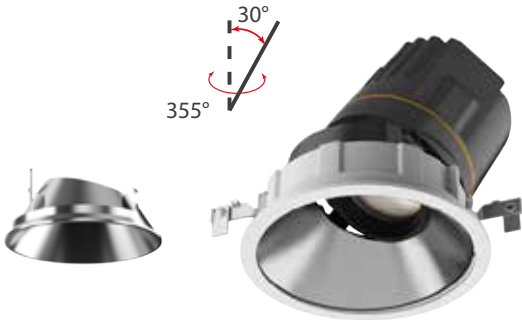

Standard adjustable reflector with 30° tilt and 355°rotation




Optional fixed reflector avoids visible ceiling aperture

Advanced ceiling installation




Standard trim

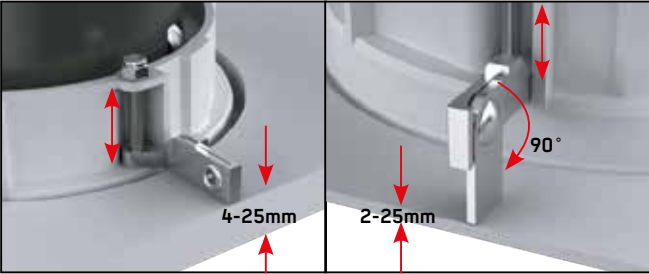

ceiling thickness
4mm to 25mm




ceiling thickness
2mm to 25mm

Trimless Installation

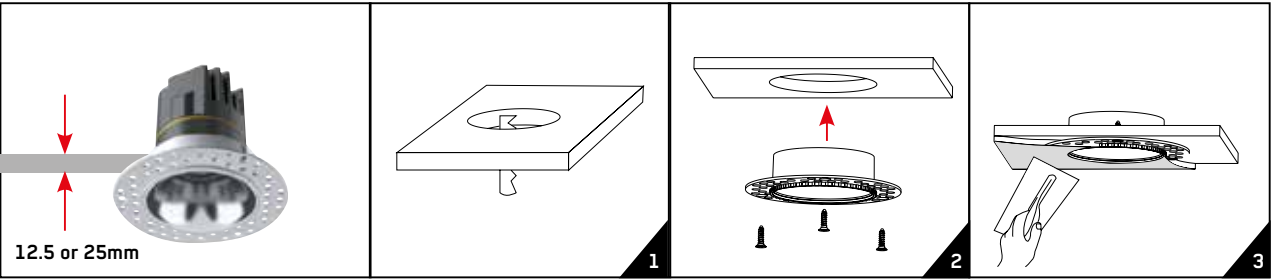

NEPTUNE






			
	LX-DL-01070F-N	LX-DL-01070F-T	LX-DL-01070F-W
⚡	12W		
💡	1020Lm	960Lm	1020Lm
🔌	220-240VAC 50/60Hz		
🌞	Luminus COB		
🌈	2700K/3000K/4000K		
Ra	≥90		
🔦	15°/24°/38°/60°		
🔌	Remote electronic power supply		
🕒	PHASE/0/1-10V /DALI as options		
📏			
IP65			



TRITON



	LX-DL-7475F	LX-DL-75105F	LX-DL-76125F	LX-DL-77160F
⚡	9W	15W	25W	35W
💡	675 lm	1125 lm	1875 lm	2625 lm
🔌	220-240VAC 50/60Hz			
🌞	SMD 2835			
🌈	2700K / 3000K / 4000K / 5000K			
Ra	≥80			
🔦	90°			
🔌	Remote electronic power supply			
🕒	PHASE/1-10V /DALI as options			
📏				
IP54				
IP65				








NEVADA

OPTIONAL COLOR

ACCESSORY





	LX-DL-11075F	LX-DL-11090F	LX-DL-11115F
⚡	7W	12W	20W
💡	455Lm	780Lm	1300Lm
🔌	220-240VAC 50/60Hz		
🌞	Luminus COB		
🌈	2700K/3000K/4000K		
Ra	≥90		
🔆	60°		
🔌	Remote electronic power supply		
📺	PHASE/0/1-10V /DALI as options		
📏			
			
IP20			



JUPITER

OPTIONAL COLOR

ACCESSORY

	LX-DL-12055F	LX-DL-12065F	LX-DL-12075F	LX-DL-12095F
⚡	5W	7W	12W	20W
💡	325Lm	455Lm	780Lm	1300Lm
🔌	220-240VAC 50/60Hz			
🌞	Luminus COB			
🌈	2700K/3000K/4000K			
Ra	≥90			
🔆	15°/25°/36°			
🔌	Remote electronic power supply			
📺	PHASE/0/1-10V /DALI as options			
📏				
				
IP20				





BAT

	LX-DL-5360F	LX-DL-5480F	LX-DL-55120F	LX-DL-56160F
⚡	3W	6W	12W	18W
💡	225lm	450lm	900lm	1350lm
🔌	220-240VAC 50/60Hz			
☀️	SMD 2835			
🌈	2700K/3000K/4000K			
Ra	≥80			
📐	120°			
🔌	Remote electronic power supply			
🕒	PHASE/1-10V /DALI as options			
📏				
📏				
🔒	IP44			



THINY



	LX-DL-5255A	LX-DL-5375A	LX-DL-5495A	LX-DL-55125A
⚡	3W	6W	8W	12W
💡	225Lm	430Lm	460Lm	900Lm
🔌	220-240VAC 50/60Hz			
☀️	CREE COB			
🌈	2700K/3000K/4000K			
Ra	≥90			
📐	10°/20°	15°/20°/36°		
🔌	Remote electronic power supply			
🕒	PHASE/0/1-10V /DALI as options			
📏				
IP20				



16 -22mm







GLOBE

Optional Accessories

Honeycomb Louver

Glass filter

Specular

Black chrome

Gold

White

Black

	LX-DL-1601		LX-DL-1861				LX-DL-11161-S		
⚡	5W	7W	8W	10W	12W	15W	20W	25W	30W
💡	2700K:282-360lm 3000K:321-390lm	2700K:338- 432lm 3000K:383-468lm	2700K:621-671lm 3000K:642-693lm	2700K:696-789lm 3000K:753-799lm	2700K:821-932lm 3000K:837-888lm	2700K:889-1020lm 3000K:939-1033lm	2700K:1253-1446lm 3000K:1278-1615lm	2700K:1495-1707lm 3000K:1505-1833lm	2700K:1678-1918lm 3000K:1701-2072lm
🔌	220-240VAC 50/60Hz								
☀️	CITIZEN								
🌈	2700K/3000K/4000K								
Ra	≥90								
🔦	15°/24°/38°/15°x40°								
🔋	Remote electronic power supply								
📶	PHASE/1-10V /DALI / BLUETOOTH								
📏	Cut-out:φ55mm Thickness 5-20mm 60mm φ60mm		Cut-out:φ78mm Thickness 5-20mm 95mm φ86mm				Cut-out:φ104mm Thickness 5-20mm 140mm φ116mm		
IP20									
IP54									



GLOBE

Optional Accessories

Honeycomb Louver

Glass filter

Specular

Black chrome


Gold

White

Black




	LX-DL-1602		LX-DL-1862				LX-DL-11162-S		
⚡	5W	7W	8W	10W	12W	15W	20W	25W	30W
💡	2700K:282-374lm 3000K:326-391lm	2700K:338- 430lm 3000K:389-470lm	2700K:621-671lm 3000K:655-721lm	2700K:696-789lm 3000K:747-799lm	2700K:819-932lm 3000K:844-912lm	2700K:889-1020lm 3000K:928-1033lm	2700K:1253-1446lm 3000K:1278-1580lm	2700K:1495-1707lm 3000K:1505-1824lm	2700K:1678-1918lm 3000K:1701-2018lm
🔌	220-240VAC 50/60Hz								
☀️	CITIZEN								
🌈	2700K/3000K/4000K								
Ra	≥90								
🔦	15°/24°/38°/15°x40°								
🔋	Remote electronic power supply								
📶	PHASE/1-10V /DALI / BLUETOOTH								
📏	Cut-out:φ55mm Thickness 5-20mm 65mm φ60mm		Cut-out:φ78mm Thickness 5-20mm 106mm φ86mm				Cut-out:φ104mm Thickness 5-20mm 147mm φ116mm		
IP20									
IP54									

To install the trimmed version

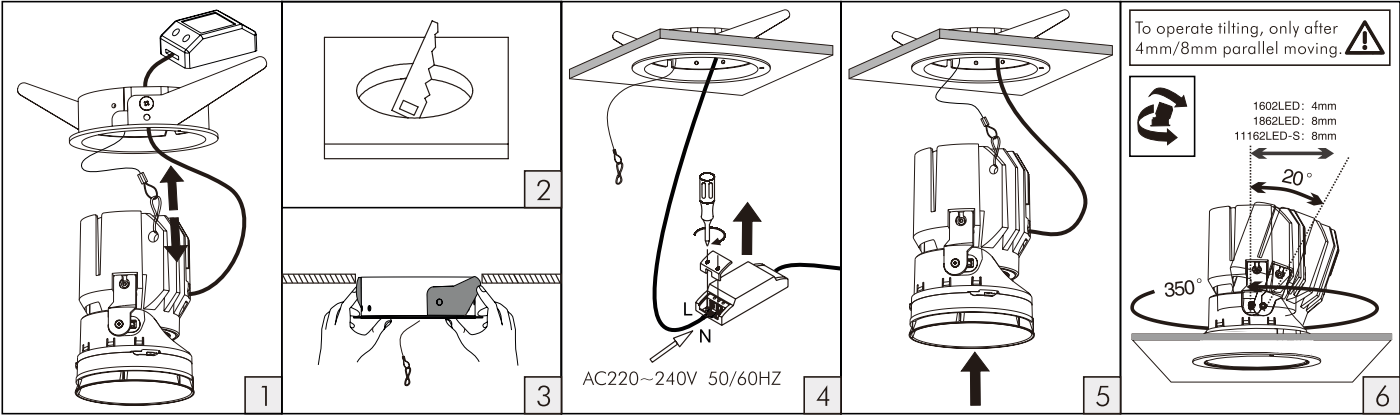






GLOBE W


	LX-DL-W1601		LX-DL-W1861				LX-DL-W1161-S		
	5W	7W	8W	10W	12W	15W	20W	25W	30W
	2700K:282-360lm 3000K:321-390lm	2700K:338- 432lm 3000K:383-468lm	2700K:621-671lm 3000K:642-693lm	2700K:696-789lm 3000K:753-799lm	2700K:821-932lm 3000K:837-888lm	2700K:889-1020lm 3000K:939-1033lm	2700K:1253-1446lm 3000K:1278-1615lm	2700K:1495-1707lm 3000K:1505-1833lm	2700K:1678-1918lm 3000K:1701-2072lm
	220-240VAC 50/60Hz								
	CITILED								
	2700K/3000K/4000K								
Ra	≥90								
	15°/24°/38°/15°x40°								
	Remote electronic power supply								
	PHASE/1-10V /DALI / BLUETOOTH								
									
IP20									
IP54									



GLOBE W

	LX-DL-W1602		LX-DL-W1862				LX-DL-W1162-S		
	5W	7W	8W	10W	12W	15W	20W	25W	30W
	2700K:282-374lm 3000K:326-391lm	2700K:338- 430lm 3000K:389-470lm	2700K:621-671lm 3000K:655-721lm	2700K:696-789lm 3000K:747-799lm	2700K:819-932lm 3000K:844-912lm	2700K:889-1020lm 3000K:929-1033lm	2700K:1253-1446lm 3000K:1278-1580lm	2700K:1495-1707lm 3000K:1505-1824lm	2700K:1678-1918lm 3000K:1701-2018lm
	220-240VAC 50/60Hz								
	CITILED								
	2700K/3000K/4000K								
Ra	≥90								
	15°/24°/38°/15°x40°								
	Remote electronic power supply								
	PHASE/1-10V /DALI / BLUETOOTH								
									
IP20									
IP54									

To install the trimmed version

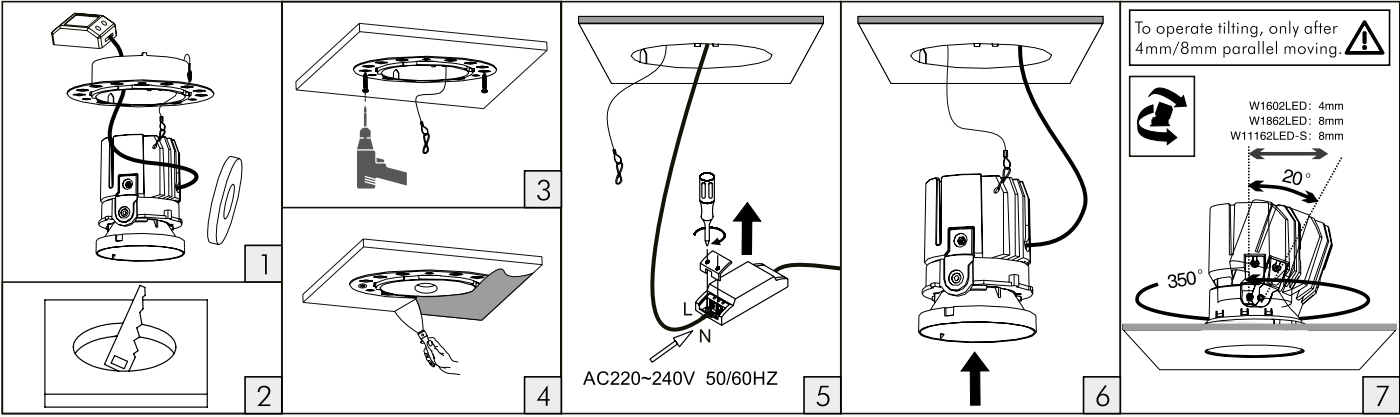



DEEP R


	LX-DL-1603		LX-DL-1863				LX-DL-11163		
⚡	5W	7W	8W	10W	12W	15W	20W	25W	30W
💡	2700K:204-294lm 3000K:209-308lm	2700K:250-348lm 3000K:254-369lm	2700K:492-612lm 3000K:502-630lm	2700K:539-693lm 3000K:551-735lm	2700K:646-802lm 3000K:660-813lm	2700K:708-868lm 3000K:715-908lm	2700K:905-1358lm 3000K:911-1402lm	2700K:1119-1593lm 3000K:1132-1602lm	2700K:1257-1754lm 3000K:1260-1772lm
🔌	220-240VAC 50/60Hz								
☀️	CITILED								
🌈	2700K/3000K/4000K								
Ra	≥90								
🔦	15°/20°/25°/30°/15°x30°		15°/24°/38°/15°x30°						
🔌	Remote electronic power supply								
📶	PHASE/1-10V / DALI / BLUETOOTH								
📏									
IP20									
IP54									



DEEP R

	LX-DL-1604		LX-DL-1864				LX-DL-11164		
⚡	5W	7W	8W	10W	12W	15W	20W	25W	30W
💡	2700K:204-287lm 3000K:209-309lm	2700K:242-343lm 3000K:254-366lm	2700K:492-879lm 3000K:502-626lm	2700K:539-693lm 3000K:551-734lm	2700K:646-802lm 3000K:660-841lm	2700K:708-868lm 3000K:715-909lm	2700K:905-1358lm 3000K:911-1421lm	2700K:1119-1593lm 3000K:1132-1607lm	2700K:1257-1759lm 3000K:1260-1772lm
🔌	220-240VAC 50/60Hz								
☀️	CITILED								
🌈	2700K/3000K/4000K								
Ra	≥90								
🔦	15°/20°/25°/30°/15°x30°		15°/24°/38°/15°x30°						
🔌	Remote electronic power supply								
📶	PHASE/1-10V / DALI / BLUETOOTH								
📏									
	IP20								
	IP54								

To install the trimmed version

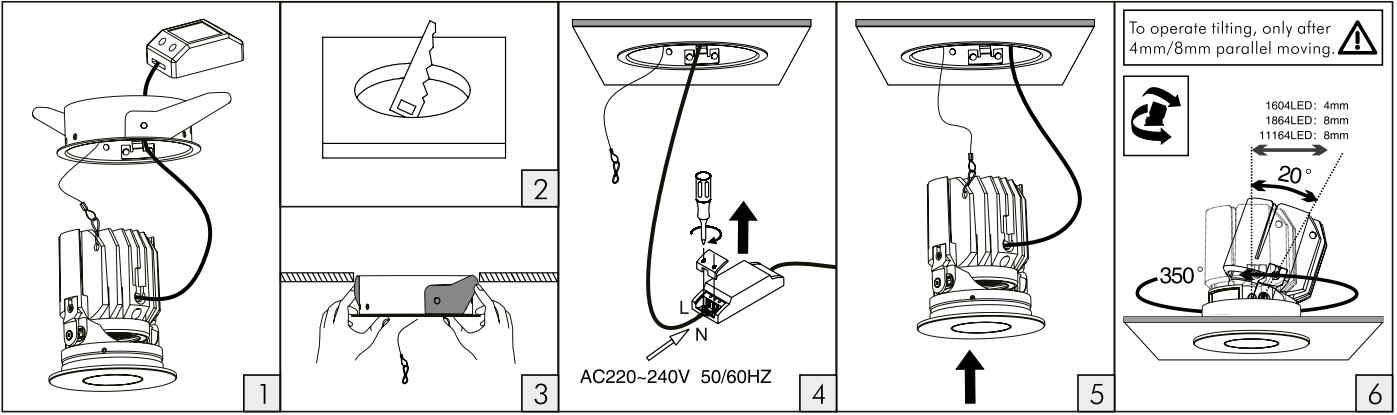



DEEP F


	LX-DL-1606		LX-DL-1867				LX-DL-11165-S		
⚡	5W	7W	8W	10W	12W	15W	20W	25W	30W
💡	2700K:225-236lm 3000K:234-257lm	2700K:296-331lm 3000K:310-342lm	2700K:403-621lm 3000K:604-593lm	2700K:449-639lm 3000K:457-655lm	2700K:511-763lm 3000K:537-774lm	2700K:546-822lm 3000K:576-834lm	2700K:766-1120lm 3000K:891-1245lm	2700K:847-1334lm 3000K:1039-1447lm	2700K:1017-1519lm 3000K:1198-1717lm
🔌	220-240VAC 50/60Hz								
☀️	CITILED								
🌈	2700K/3000K/4000K								
Ra	≥90								
📏	15°/24°								
🔌	Remote electronic power supply								
📶	PHASE/1-10V / DALI / BLUETOOTH								
📏									
	IP20								
	IP54								





DEEP FW

	LX-DL-W1606		LX-DL-W1867				LX-DL-W11165-S		
⚡	5W	7W	8W	10W	12W	15W	20W	25W	30W
💡	2700K:225-236lm 3000K:234-257lm	2700K:296-331lm 3000K:310-342lm	2700K:403-621lm 3000K:604-593lm	2700K:449-639lm 3000K:457-655lm	2700K:511-763lm 3000K:537-774lm	2700K:546-822lm 3000K:576-834lm	2700K:766-1120lm 3000K:891-1245lm	2700K:847-1334lm 3000K:1039-1447lm	2700K:1017-1519lm 3000K:1198-1717lm
🔌	220-240VAC 50/60Hz								
☀️	CITILED								
🌈	2700K/3000K/4000K								
Ra	≥90								
📏	15°/24°								
🔌	Remote electronic power supply								
📶	PHASE/1-10V /DALI / BLUETOOTH								
📏									
	IP20								
	IP54								

To install the trimmed version


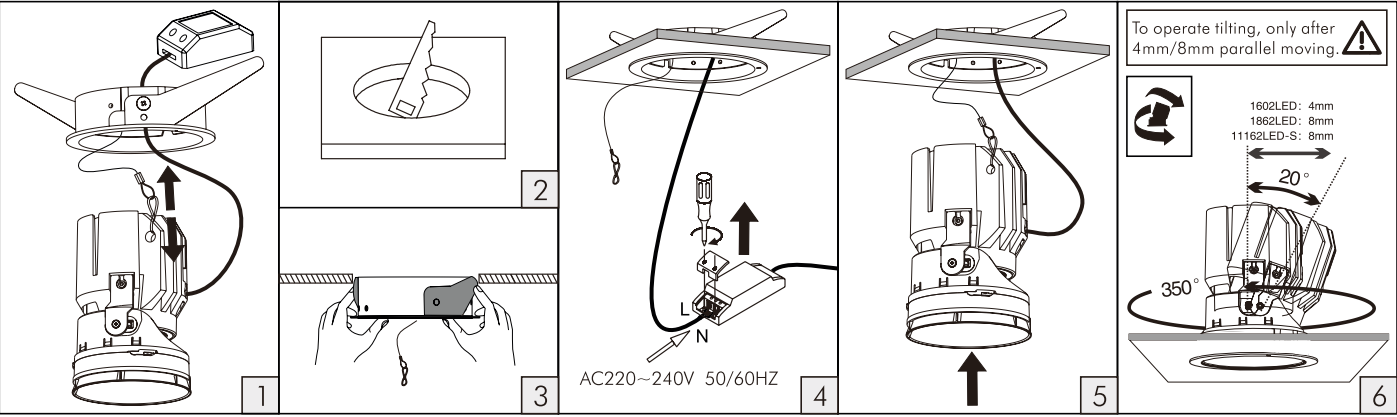


INFINITY S / INFINITY SF






			
LX-DL-1641		LX-DL-1642	
	8W		
	3000K : 610-623lm		3000K : 514-520lm
	220-240VAC 50/60Hz		
	CITIZEN		
	2700K/3000K/4000K/5000K		
Ra	≥90		
	21°/35°		
	Remote electronic power supply		
	PHASE/1-10V /DALI / BLUETOOTH		
			



INFINITY R / INFINITY RF





			
LX-DL-1643		LX-DL-1644	
	8W		
	3000K : 613-626lm		3000K :518-526lm
	220-240VAC 50/60Hz		
	CITIZEN		
	2700K/3000K/4000K/5000K		
Ra	≥90		
	18°/40°		21°/35°
	Remote electronic power supply		
	PHASE/1-10V /DALI / BLUETOOTH		
			


INFINITY S / INFINITY SW


							
LX-DL-11221		LX-DL-W11221		LX-DL-11691		LX-DL-W11691	
2*8W				2*12W			
3000K :1220-1246lm				3000K : 1744-1858lm			
220-240VAC 50/60Hz							
CITIZEN							
2700K/3000K/4000K/5000K							
Ra ≥90							
21°/35°				20°/30°/52°			
Remote electronic power supply							
PHASE/1-10V /DALI / BLUETOOTH							
							
IP20							



INFINITY SF / INFINITY SFW

							
LX-DL-11222		LX-DL-W11222		LX-DL-11692		LX-DL-W11692	
2*8W				2*12W			
3000K : 1028-1040lm				3000K : 1564-1834lm			
				220-240VAC 50/60Hz			
				CITIZEN			
				2700K/3000K/4000K/5000K			
Ra		≥90					
21°/35°				15°/25°/33°			
		Remote electronic power supply					
		PHASE/1-10V /DALI / BLUETOOTH					
							
IP20							

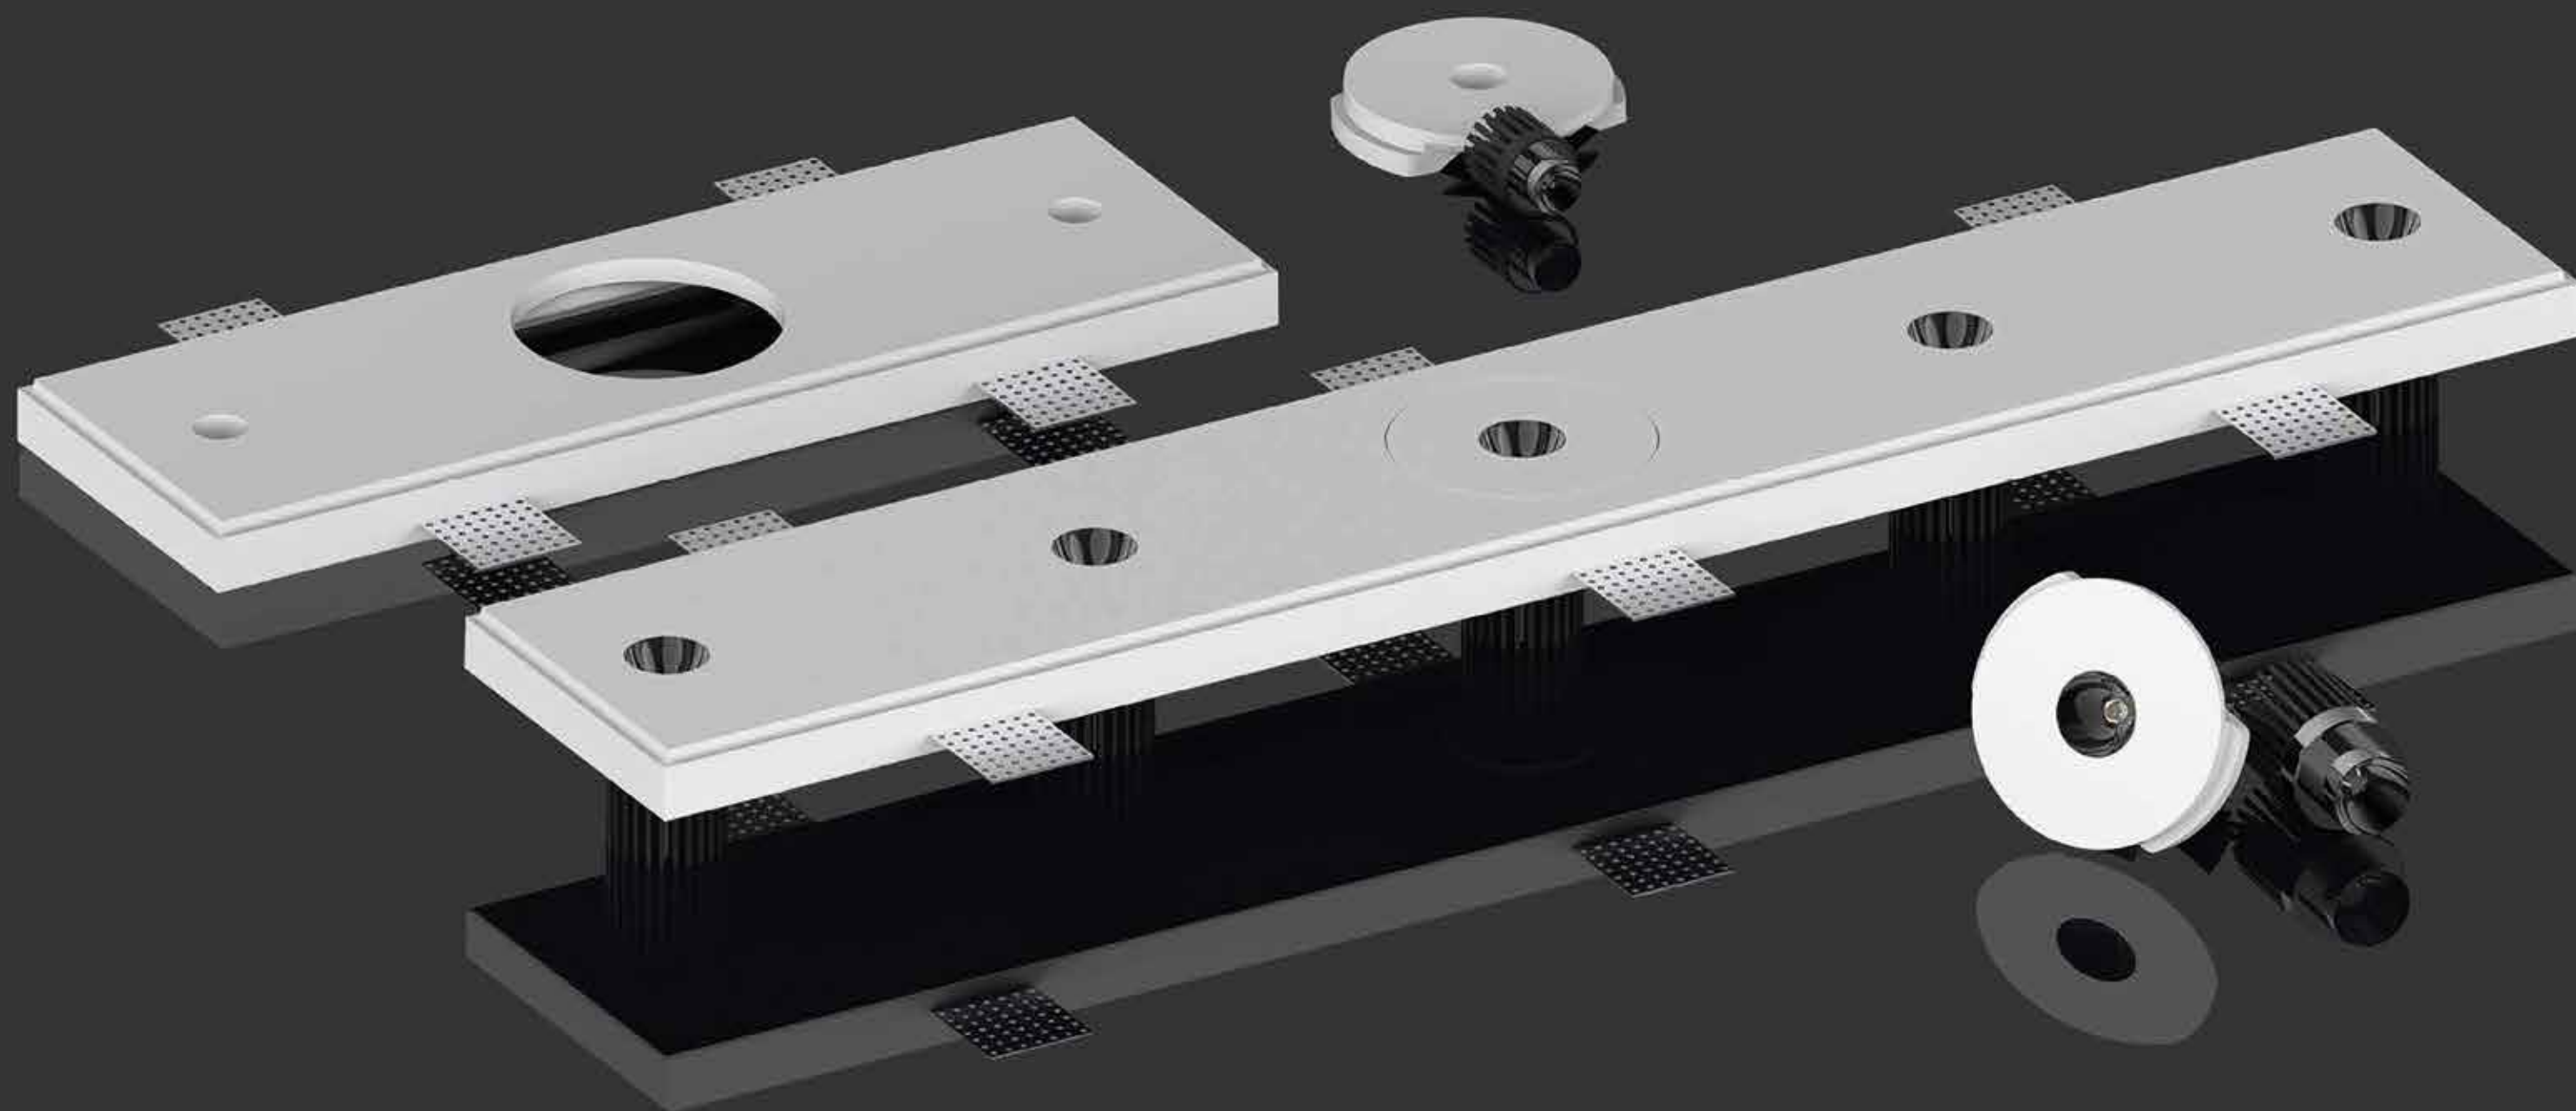


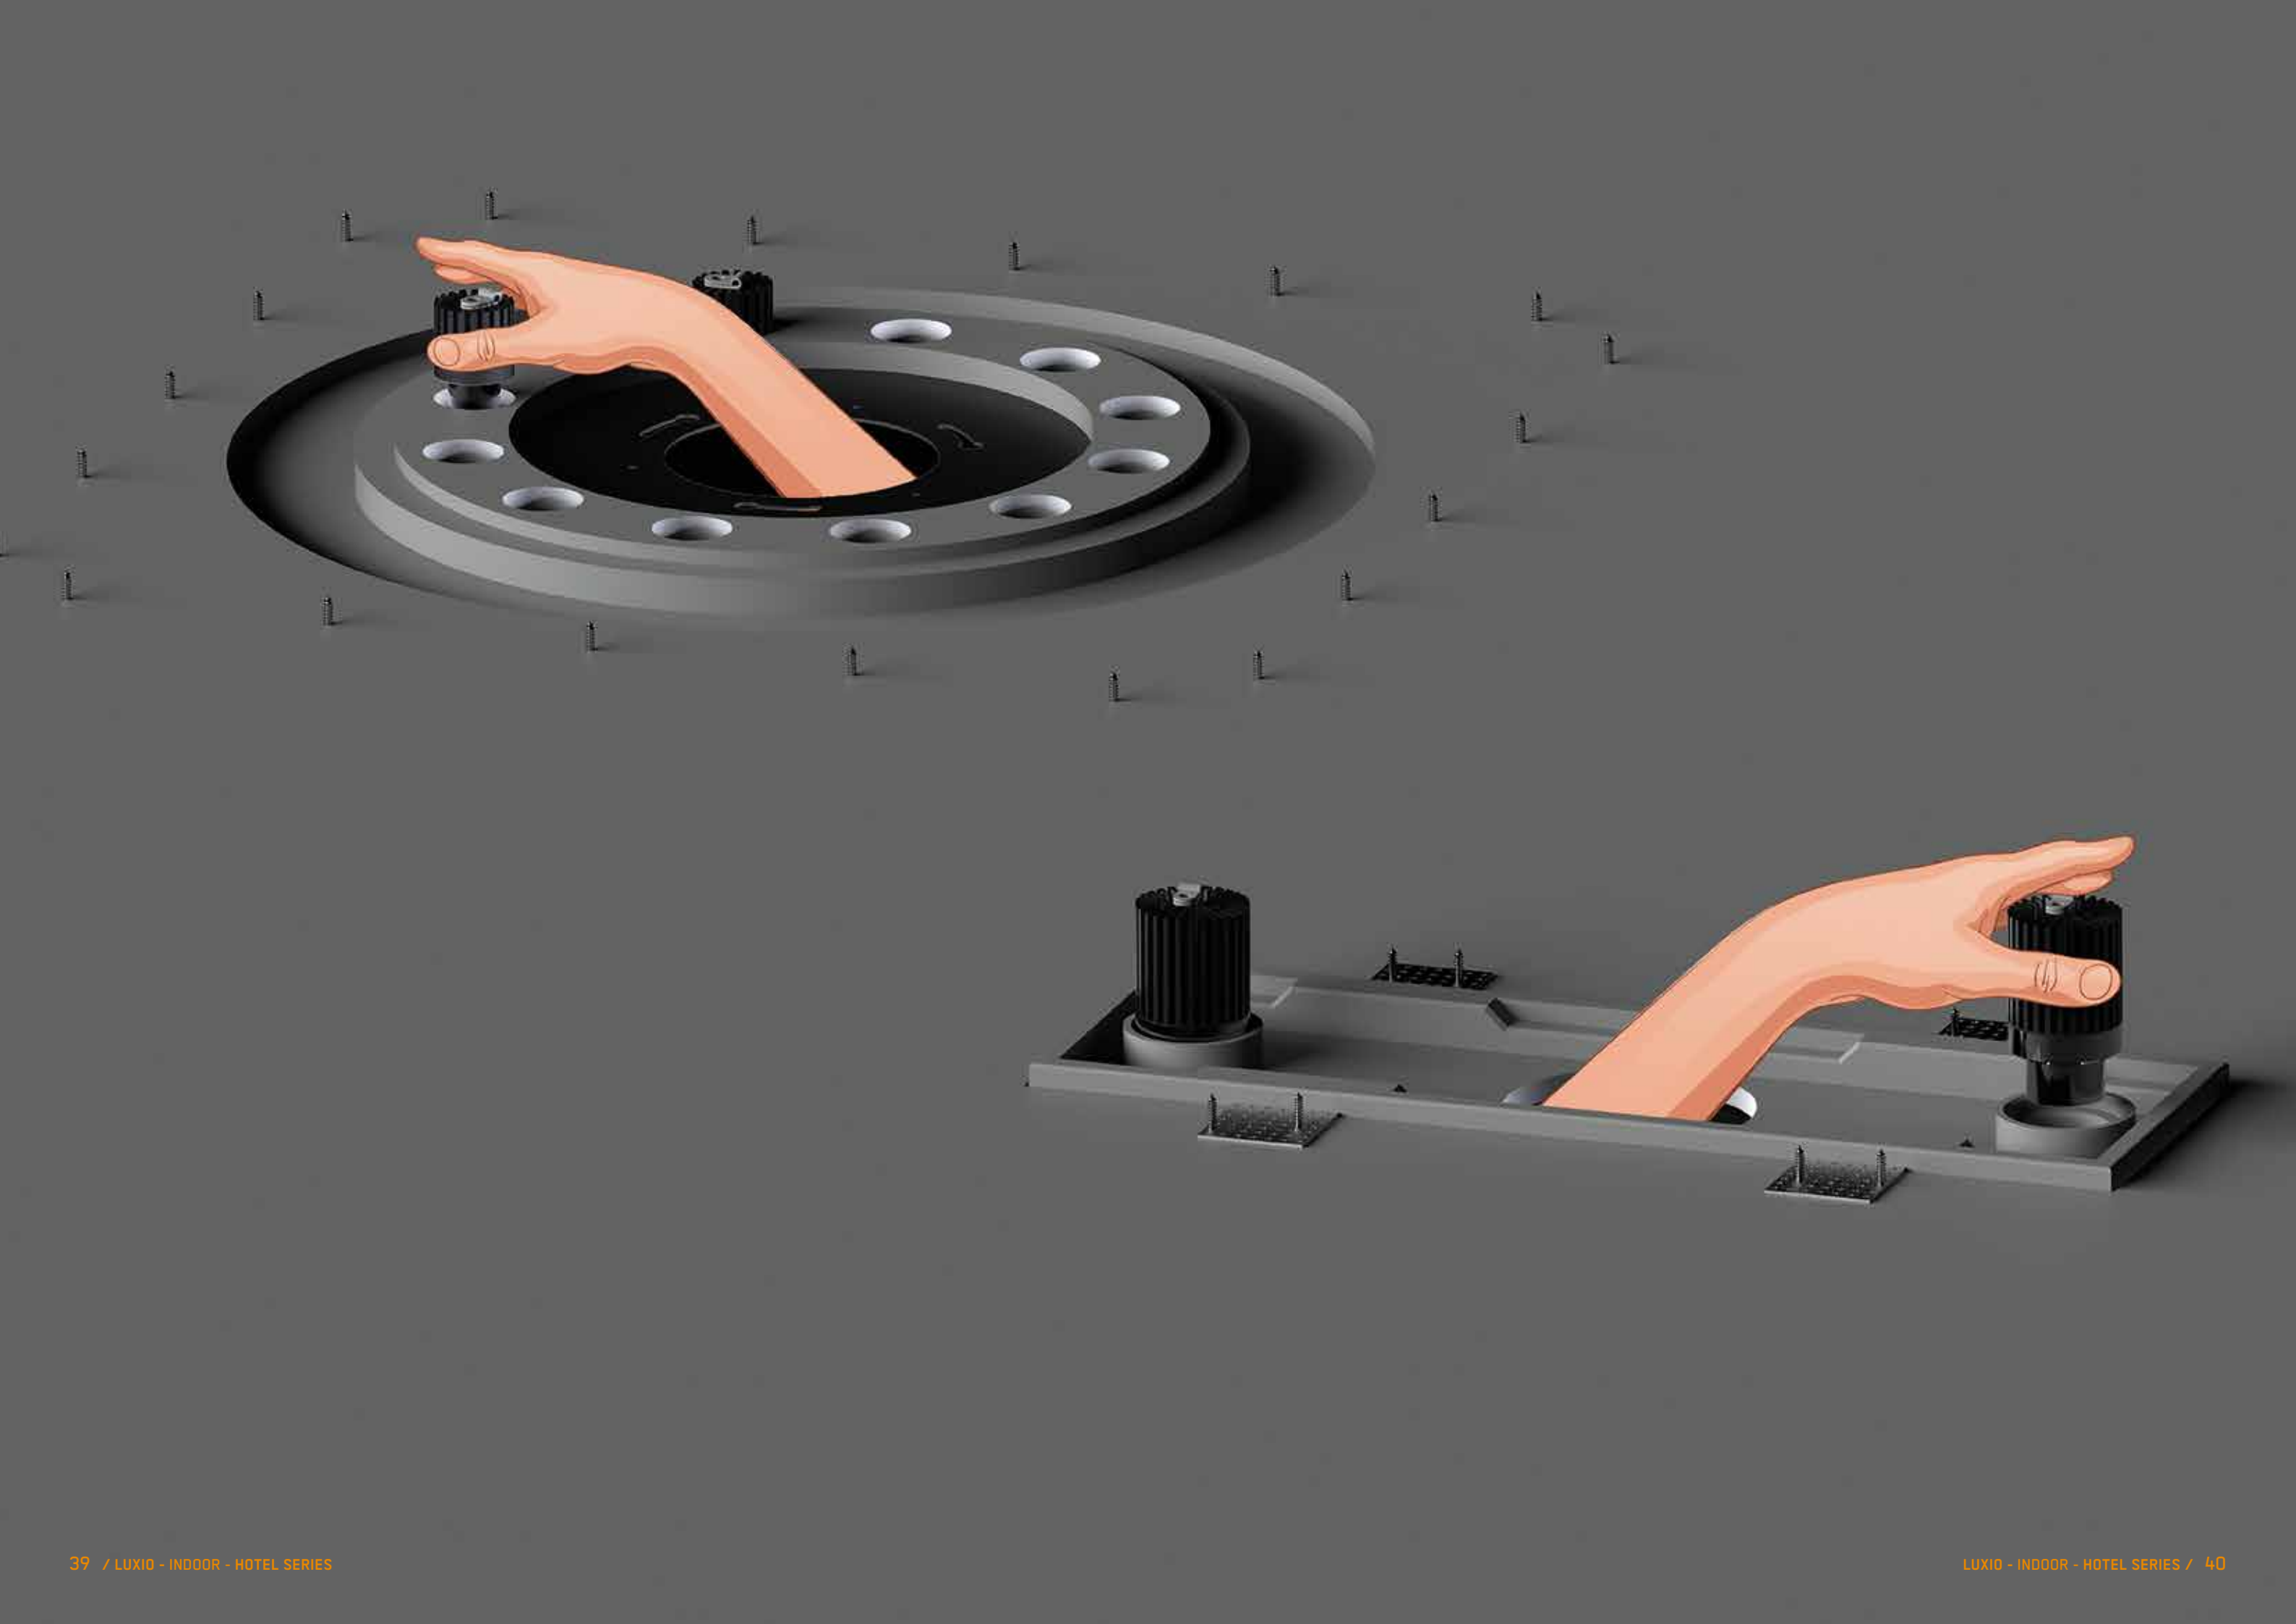




TWINKLESTAR L







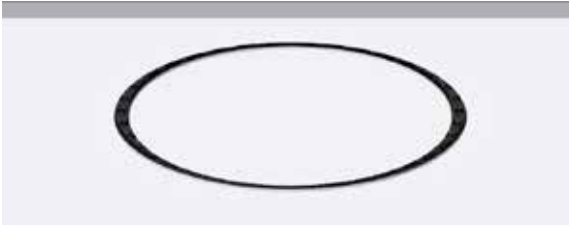





TWINKLESTAR R

	LX-DL-1231-12	LX-DL-1231-24
⚡	12*3W	24*3W
💡	2700K : 1824-1884lm / 3000K: 2004-2052lm	2700K : 3648-3768lm / 3000K: 4008-4104lm
🔌	220-240VAC 50/60Hz	
🌞	OSRAM	
🌈	2700K/3000K/4000K	
Ra	≥90	
📐	15°/24°/34°	
🔋	Remote electronic power supply	
📶	PHASE/1-10V /DALI / BLUETOOTH	
📏		
IP20		

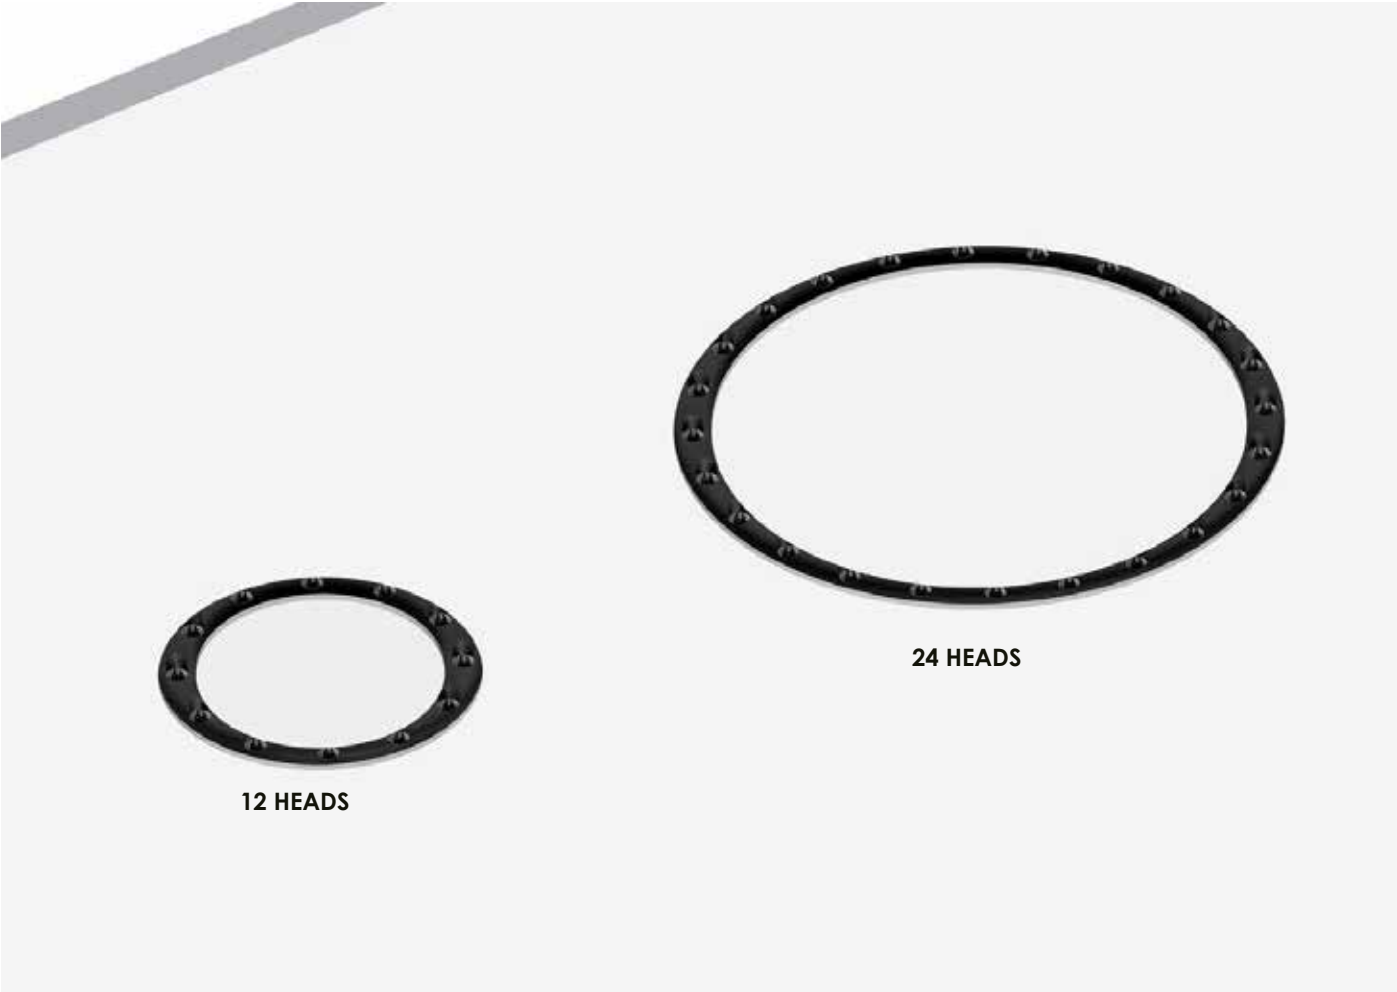

				
LX-DL-1902		LX-DL-1802	LX-DL-1922	LX-DL-1941
8W / 10W				
8W : 2700K : 549-612lm / 3000K : 560-616lm 10W : 2700K : 646-716lm / 3000K : 691-760lm		8W : 2700K : 628-691lm / 3000K : 630-700lm / 10W : 2700K : 746-853lm / 3000K : 809-887lm		
220-240VAC 50/60Hz				
CITIZEN				
2700K/3000K/4000K/5000K				
Ra ≥ 90				
25°/38°		25°/38°/60°		
Remote electronic power supply				
PHASE/1-10V /DALI / BLUETOOTH				
				
				
				
				
IP44				
IP20				







				
LX-DL-017		LX-DL-W017	LX-DL-018	LX-DL-W018
8W / 10W		2*8W / 2*10W		
8W : 2700K : 598-652lm / 3000K : 637-695lm 10W : 2700K : 755-795lm / 3000K : 802-872lm		2*8W : 2700K : 1290-1364lm / 3000K : 1291-1407lm 2*10W : 2700K : 1585-1660lm / 3000K : 1623-1770lm		
220-240VAC 50/60Hz				
CITIZEN				
2700K/3000K/4000K/5000K				
≥90				
25°/38°/60°				
Remote electronic power supply				
PHASE/1-10V /DALI / BLUETOOTH				
				
				
				
				
IP44				
IP20				




ORION






				
	LX-DL-10075A	LX-DL-10095A	LX-DL-10075AS	LX-DL-10095AS
	7W	12W	7W	12W
	490Lm	840Lm	490Lm	840Lm
	220-240VAC 50/60Hz			
	Luminus			
	2700K/3000K/4000K			
Ra	≥90			
	18°/24°/36°			
	Remote electronic power supply			
	PHASE/0/1-10V /DALI as options			
				
IP20				



ORION



			
	LX-DL-10275AS	LX-DL-10375AS	LX-DL-10295AS
	2x7W	3x7W	2x12W
	2x490Lm	3x490Lm	2x840Lm
	220-240VAC 50/60Hz		
	Luminus		
	2700K/3000K/4000K		
Ra	≥90		
	18°/24°/36°		
	Remote electronic power supply		
	PHASE/0/1-10V /DALI as options		
			
IP20			




NEBULE ROUND






	LX-DL-J08060A	LX-DL-J08075A	LX-DL-J08090A
⚡	6W	12W	18W
💡	390Lm	780Lm	1170Lm
🔌	220-240VAC 50/60Hz		
🌞	Luminus		
🌈	2700K/3000K/4000K		
Ra	≥ 90		
🔦	24°/36°	15°/24°/36°	
🔌	Remote electronic power supply		
🕒	PHASE/0/1-10V /DALI as options		
📏			
	IP20		



NEBULE SQUARE



	LX-DL-08060AS	LX-DL-08075AS	LX-DL-08090AS
⚡	6W	12W	18W
💡	390Lm	780Lm	1170Lm
🔌	220-240VAC 50/60Hz		
🌞	Luminus		
🌈	2700K/3000K/4000K		
Ra	≥ 90		
🔦	24°/36°	15°/24°/36°	
🔌	Remote electronic power supply		
🕒	PHASE/0/1-10V /DALI as options		
📏			
	IP20		



NEBULE GRILLE



	LX-DL-08260AS	LX-DL-08275AS	LX-DL-08290AS
⚡	2x6W	2x12W	2x18W
💡	2x390Lm	2x780Lm	2x1170Lm
🔌	220-240VAC 50/60Hz		
☀️	Luminus		
🌈	2700K/3000K/4000K		
Ra	≥90		
🔦	24°/36°	15°/24°/36°	
🔌	Remote electronic power supply		
📶	PHASE/0/1-10V /DALI as options		
📏			
	IP20		



NEBULE GRILLE



	LX-DL-08360AS	LX-DL-08375AS	LX-DL-08390AS
⚡	3x6W	3x12W	3x18W
💡	3x390Lm	3x780Lm	3x1170Lm
🔌	220-240VAC 50/60Hz		
☀️	Luminus		
🌈	2700K/3000K/4000K		
Ra	≥ 90		
🔦	24°/36°	15°/24°/36°	
🔌	Remote electronic power supply		
🕒	PHASE/0/1-10V /DALI as options		
📏			
	IP20		



CUBIST



	LX-DL-18035FS	LX-DL-18065FS	LX-DL-18095FS	LX-DL-18155FS	LX-DL-18065FST	LX-DL-18095FS
⚡	3W	5W	8W	12W	10W	18W
💡	150Lm	250Lm	400Lm	600Lm	500Lm	900Lm
🔌	220-240VAC 50/60Hz					
🌞	Osram SMD					
🌈	2700K/3000K/4000K					
Ra	≥ 90					
📐	24°					
🔌	Remote electronic power supply					
🔄	PHASE/0/1-10V /DALI as options					
📏						
IP20						





CUBIST ROUND



	LX-DL-18035F	LX-DL-18050F	LX-DL-18055F	LX-DL-18075F
⚡	3W	5W	8W	15W
💡	150Lm	250Lm	400Lm	750Lm
🔌	220-240VAC 50/60Hz			
🌞	Osram SMD			
🌈	2700K/3000K/4000K			
Ra	≥ 90			
📐	24°			
🔌	Remote electronic power supply			
🔄	PHASE/0/1-10V /DALI as options			
📏				
IP20				







PEGASUS



					
	LX-DL-09050FS	LX-DL-09250FS	LX-DL-09350FS	LX-DL-09450FL	LX-DL-09450FS
	5W	2x5W	3x5W	4x5W	4x5W
	325Lm	2x325Lm	3x325Lm	4x325Lm	4x325Lm
	220-240VAC 50/60Hz				
	Luminus				
	2700K/3000K/4000K				
Ra	≥90				
	18°/24°/36°				
	Remote electronic power supply				
	PHASE/0/1-10V /DALI as options				
					
IP20					




ARRAY

						
	LX-DL-15040F	LX-DL-15100F	LX-DL-15160F	LX-DL-15310F	LX-DL-15070FS	LX-DL-15100FS
	3W	6W	12W	24W	10W	18W
	150Lm	360Lm	740Lm	1560Lm	600Lm	1170Lm
	220-240VAC 50/60Hz					
	CREE COB					
	2700K/3000K/4000K					
Ra	≥90					
	12°/28°/34°/48°					
	Remote electronic power supply					
	PHASE/0/1-10V /DALI as options					
						
IP20						




LUNA DOWNLIGHT






IP54

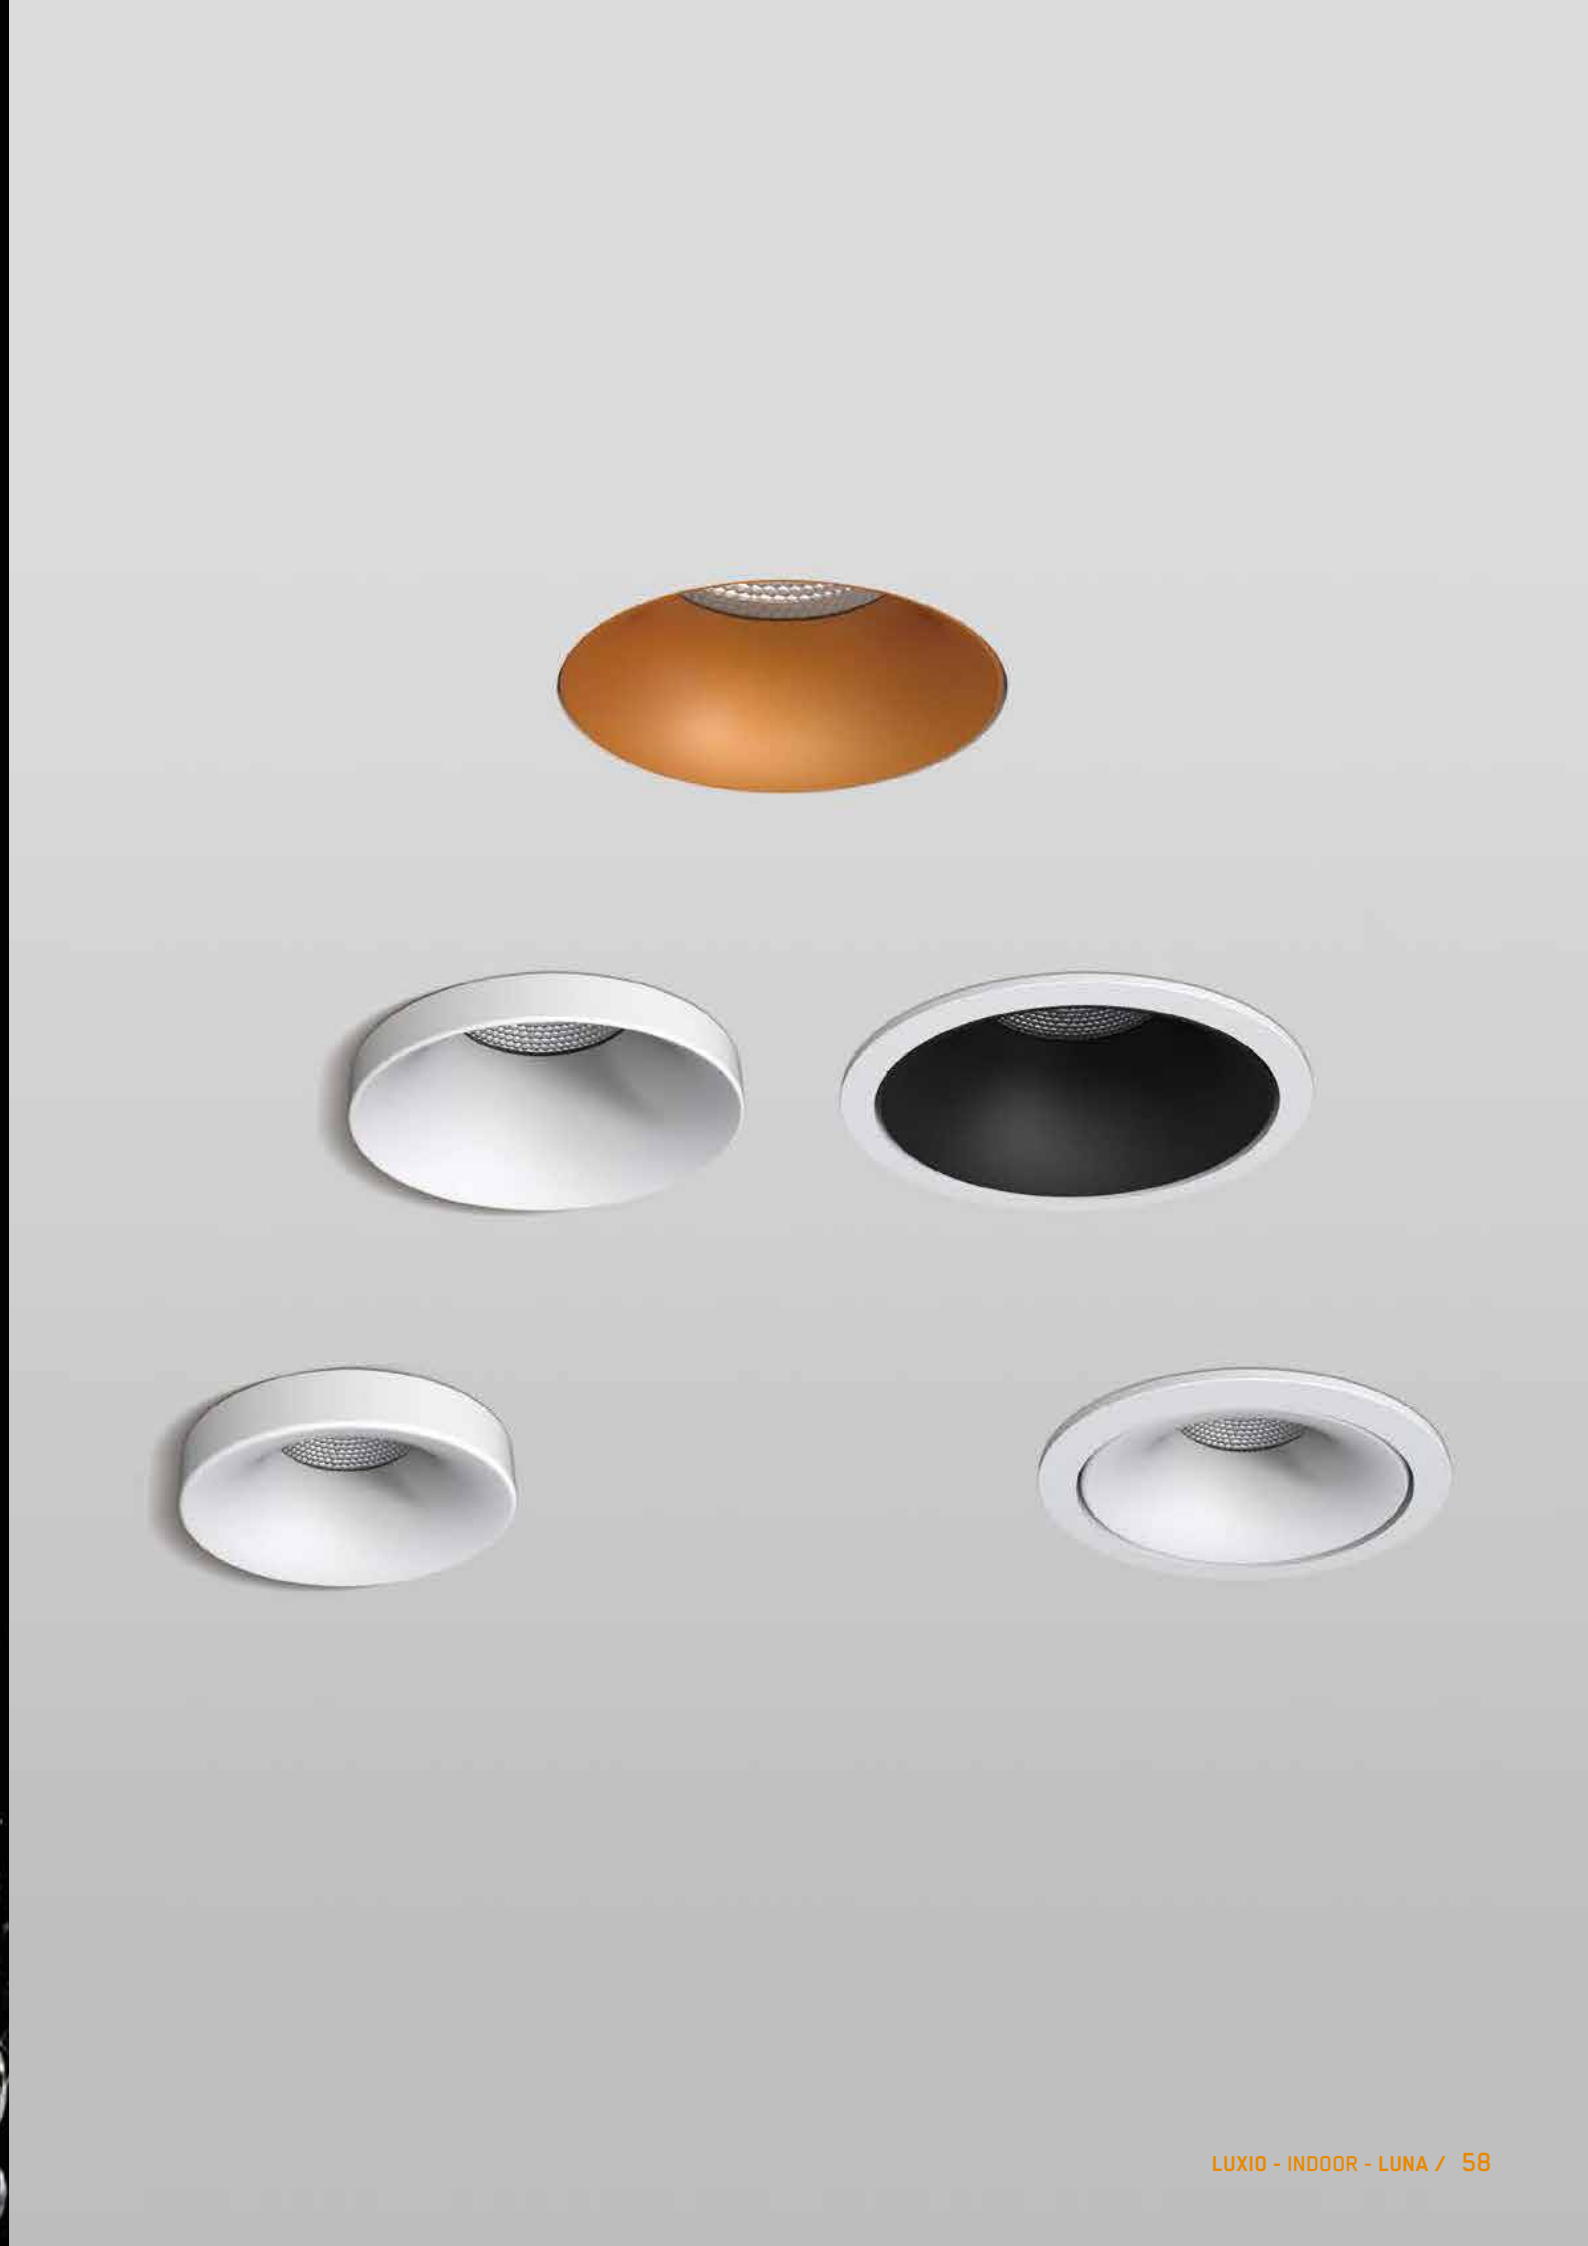

CASTELLO

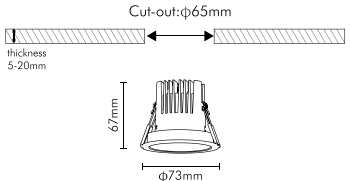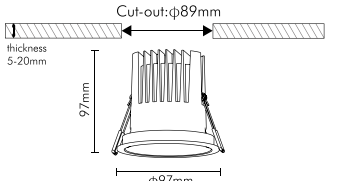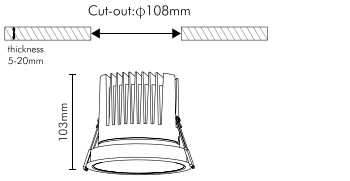		
LX-DL-1731 LX-DL-1971 LX-DL-11151		
	7W	15W
	3000K : 412-446lm	3000K : 852-879lm
	220-240VAC 50/60Hz	
	CITIZEN	
	2700K/3000K/4000K/5000K	
Ra	≥90	
	18°/36°	20°/35°/50°
	Remote electronic power supply	
	PHASE/1-10V /DALI / BLUETOOTH	
		
		
		

CASTELLO

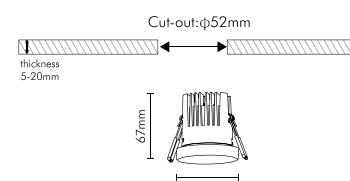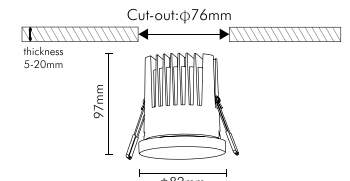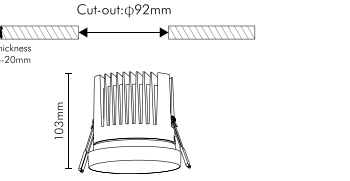		
LX-DL-1591 LX-DL-1821 LX-DL-11009		
	7W	15W
	3000K : 412-446lm	3000K : 852-879lm
	220-240VAC 50/60Hz	
	CITIZEN	
	2700K/3000K/4000K/5000K	
Ra	≥90	
	18°/36°	20°/35°/50°
	Remote electronic power supply	
	PHASE/1-10V /DALI / BLUETOOTH	
		
		
		






TIBERI

	LX-DL-44065F	LX-DL-45090F	LX-DL-46115F	LX-DL-47160F	LX-DL-48195F
⚡	7W	9W	15W	25W	35W
💡	455 lm	585 lm	975 lm	1625 lm	2275 lm
🔌	220-240VAC 50/60Hz				
🌞	Cree COB				
🌈	2700K / 3000K / 4000K / 6000K				
Ra	≥80				
🔦	40°				
🔌	Remote electronic power supply				
📺	PHASE/1-10V /DALI as options				
📏					
IP20					







GRACE

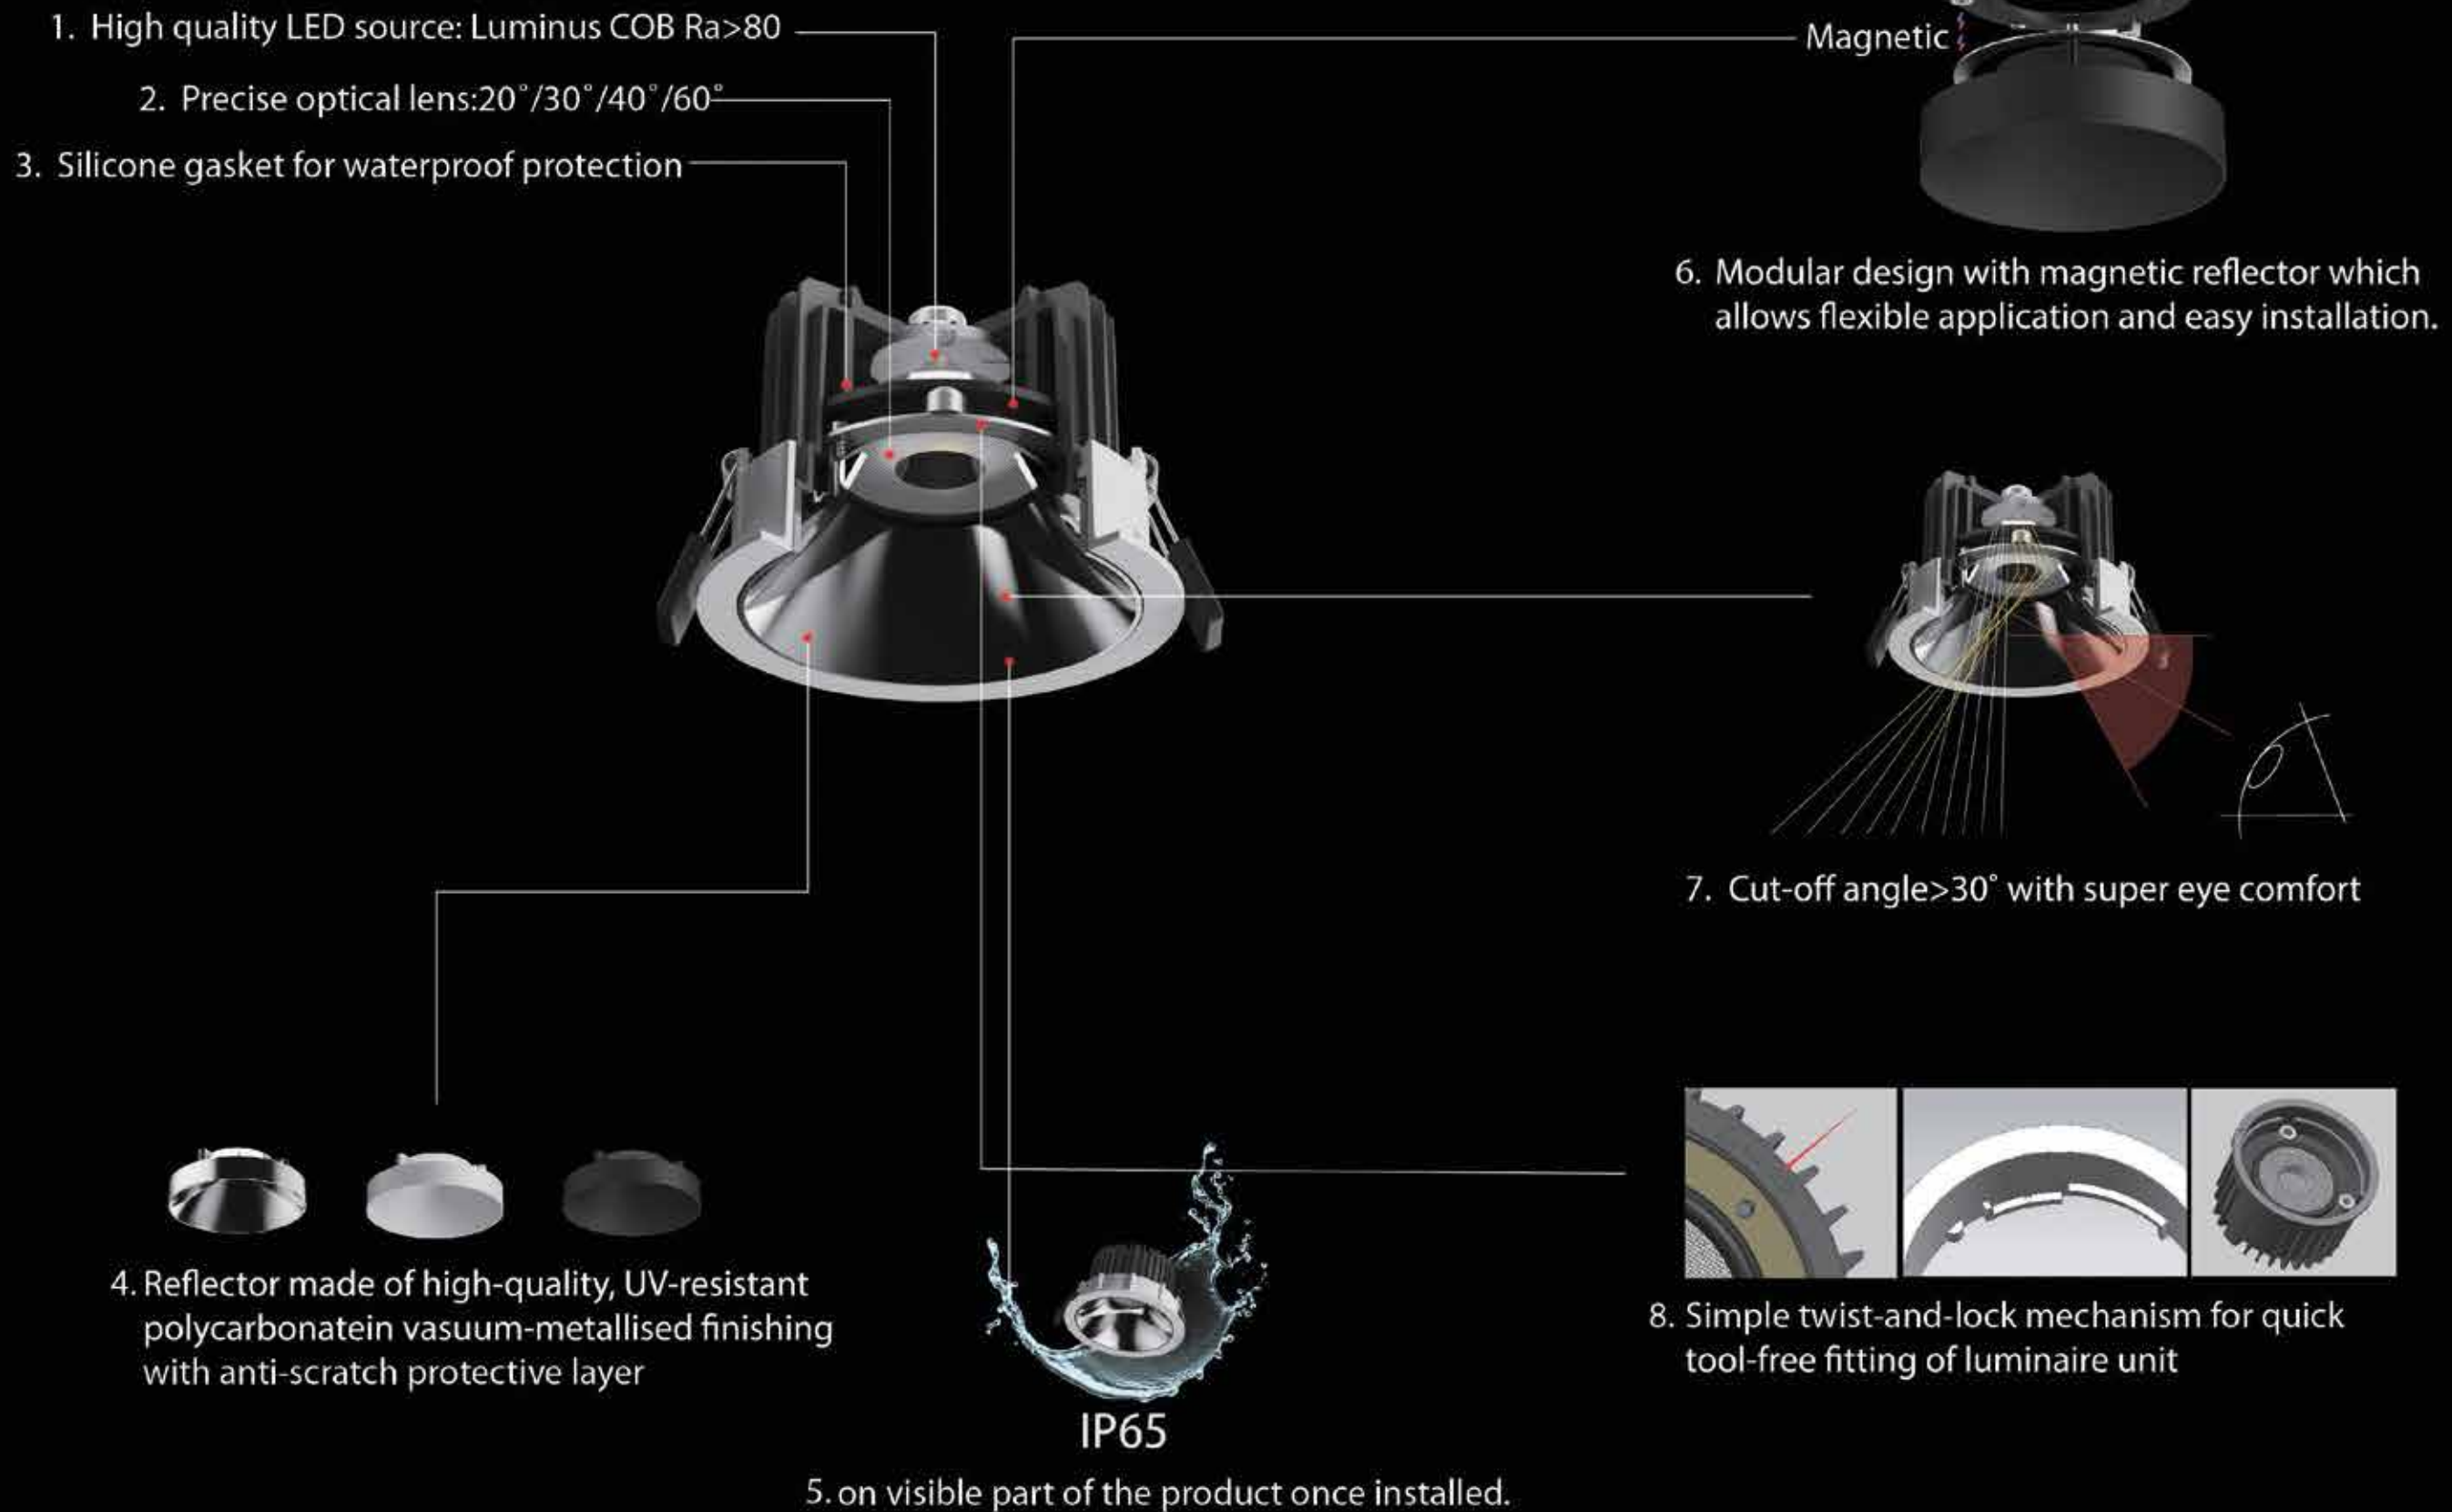



GRACE / GRACE W



	LX-DL-83100F		LX-DL-84150F		LX-DL-W83100FT		LX-DL-W84150FT
⚡	15W	18W	30W	35W	15W	18W	30W
💡	1800lm	2120lm	3600lm	4200lm	1800lm	2120lm	3600lm
🔌	220-240VAC 50/60Hz						
🌞	LUMINUS						
🌈	2700K / 3000K / 4000K / 5000K						
Ra	≥80						
🔦	20°/30°/40°/60°						
🔌	Remote electronic power supply						
🕒	PHASE/0/1-10V /DALI as options						
📏							
							
	UGR 19						
IP65							












MINIDO

	LX-DL-1392		LX-DL-1394		LX-DL-1401
⚡	1W	3W	1W	3W	3W
💡	2700K: 73-88lm 3000K: 94-102lm	2700K: 132-160lm 3000K: 163-181lm	2700K: 71-88lm 3000K: 79-89lm	2700K: 129-146lm 3000K: 134-153lm	2700K: 152-157lm 3000K: 167-171lm
🔌	220-240VAC 50/60Hz				
🌞	SMD 2835				
🌈	2700K / 3000K / 4000K / 5000K				
Ra	≥80				
📐	15°/20°/25°/30°				
🔌	Remote electronic power supply				
📶	PHASE/1-10V /DALI / BLUETOOTH				
📏					



			
LX-DL-05050F		LX-DL-W05050T	
7W/9W			
420lm/ 540lm			
220-240VAC 50/60Hz			
BRIDGELUX			
2700K/3000K/4000K			
Ra ≥90			
15°			
Remote electronic power supply			
PHASE/0/1-10V /DALI as options			
			
IP20			





		PASCAL II				SECONDARY REFLECTOR 	
LX-DL-17070F		LX-DL-17095F	LX-DL-17105F	LX-DL-17150F	LX-DL-17165F	LX-DL-17190F	
7W		10W	15W	20W	30W	35W	
560lm		800lm	1200lm	1600lm	2400lm	2800lm	
220-240VAC 50/60Hz							
Osram SMD							
2700K/3000K/4000K							
Ra ≥ 80							
60°							
Remote electronic power supply							
PHASE/1-10V /DALI as options							
							
							
IP44							







ALPHA

	LX-DL-25125F	LX-DL-25125L
	25W	
	1600 lm	1800 lm
	220-240VAC 50/60Hz	
	CREE COB	SMD 2835
	2700K / 3000K / 4000K	
Ra	≥80	
	10° / 20° / 30°	60°
	Remote electronic power supply	
	PHASE/1-10V /DALI as options	
		
IP20		






WALL WASHER DOWNLIGHT





JAZZ





	LX-DL-1931		LX-DL-1934		LX-DL-11171		
⚡	10W	15W	10W	15W	25W	30W	36W
💡	2700K: 932lm 3000K: 958lm	2700K: 1214lm 3000K: 1222lm	2700K: 877lm 3000K: 905lm	2700K: 1007lm 3000K: 1149lm	2700K: 2275lm 3000K: 2281lm	2700K: 2565lm 3000K: 2571lm	2700K: 3095lm 3000K: 3098lm
🔌	220-240VAC 50/60Hz						
🌞	CITIZEN						
🌈	2700K / 3000K / 4000K / 5000K						
Ra	≥90						
📐	Optical Tilt 5°(Beam angle 23°x25°)		Optical Tilt 5°(Beam angle 22°x24°)		Optical Tilt 5°(Beam angle 22°x25°)		
🔌	Remote electronic power supply						
🔄	NON-DIM/PHASE/1-10V /DALI /BLUETOOTH						
📏							
	IP20						

LASER

	LX-DL-01075W	LX-DL-W01075WT	LX-DL-01075WS	LX-DL-W01075WST
⚡	12W			
💡	900 lm			
🔌	220-240VAC 50/60Hz			
☀️	Luminus COB			
🌈	2700K / 3000K / 4000K / 5000K			
Ra	≥90			
📐	Wallwasher			
🔌	Remote electronic power supply			
🔌	PHASE/1-10V /DALI as options			
📏				
IP65				







LINE





				
	LX-DL-1651	LX-DL-11131	LX-DL-12091	LX-DL-13051
⚡	5W	10W	20W	30W
💡	2700K:241-318lm 3000K:285-334lm	2700K:513-587lm 3000K:522-688lm	2700K:1052-1255lm 3000K:1064-1265lm	2700K:1544-1793lm 3000K:1736-2053lm
🔌	220-240VAC 50/60Hz			
☀️	CREE			
🌈	2700K/3000K/4000K/5000K			
Ra	>90			
📏	15°/29°/50°/60°/16°x36°			
🔌	Remote electronic power supply			
🕒	PHASE/1-10V /DALI			
📏				
IP20				



LINE W


				
	LX-DL-W1651	LX-DL-W11131	LX-DL-W12091	LX-DL-W13051
⚡	5W	10W	20W	30W
💡	2700K:241-318lm 3000K:285-334lm	2700K:513-587lm 3000K:522-688lm	2700K:1052-1255lm 3000K:1064-1265lm	2700K:1544-1793lm 3000K:1736-2053lm
🔌	220-240VAC 50/60Hz			
☀️	CREE			
🌈	2700K/3000K/4000K/5000K			
Ra	>90			
📏	15°/29°/50°/60°/16°x36°			
🔌	Remote electronic power supply			
🕒	PHASE/1-10V /DALI			
📏				
IP20				

SNIPER

				
	LX-DL-1653	LX-DL-11133	LX-DL-12093	LX-DL-13053
⚡	5W	10W	20W	30W
💡	2700K: 241-318lm 3000K: 285-334lm	2700K: 513-587lm 3000K: 522-688lm	2700K: 1052-1255lm 3000K: 1064-1265lm	2700K: 1544-1793lm 3000K: 1736-2053lm
🔌	220-240VAC 50/60Hz			
🌞	CREE			
🌈	2700K/3000K/4000K/5000K			
Ra	>90			
📐	15°/29°/50°/60°/16°x36°			
🔌	Remote electronic power supply			
📷	PHASE/1-10V /DALI			
📏				
IP20				


Installation Steps

1




Make a cutout in the ceiling suitable for the fitting.

2




Insert the pre-mounted kit to the ceiling, and fasten it by 4 screws.

3




Plaster ceiling to hide screws and pre-mounted kit.

4



Turn off the power switch.


5



AC220~240V
50/60Hz


Connect the power wire with the LED power supply, and insert the fitting into the mounted kit, until it locked.

6



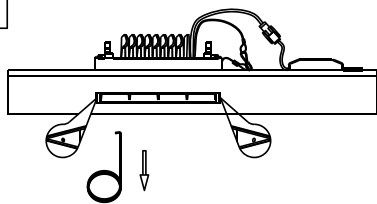


Removal or replacement:
Use the dismounted device to insert the mini hold on the side, and then pull down carefully.






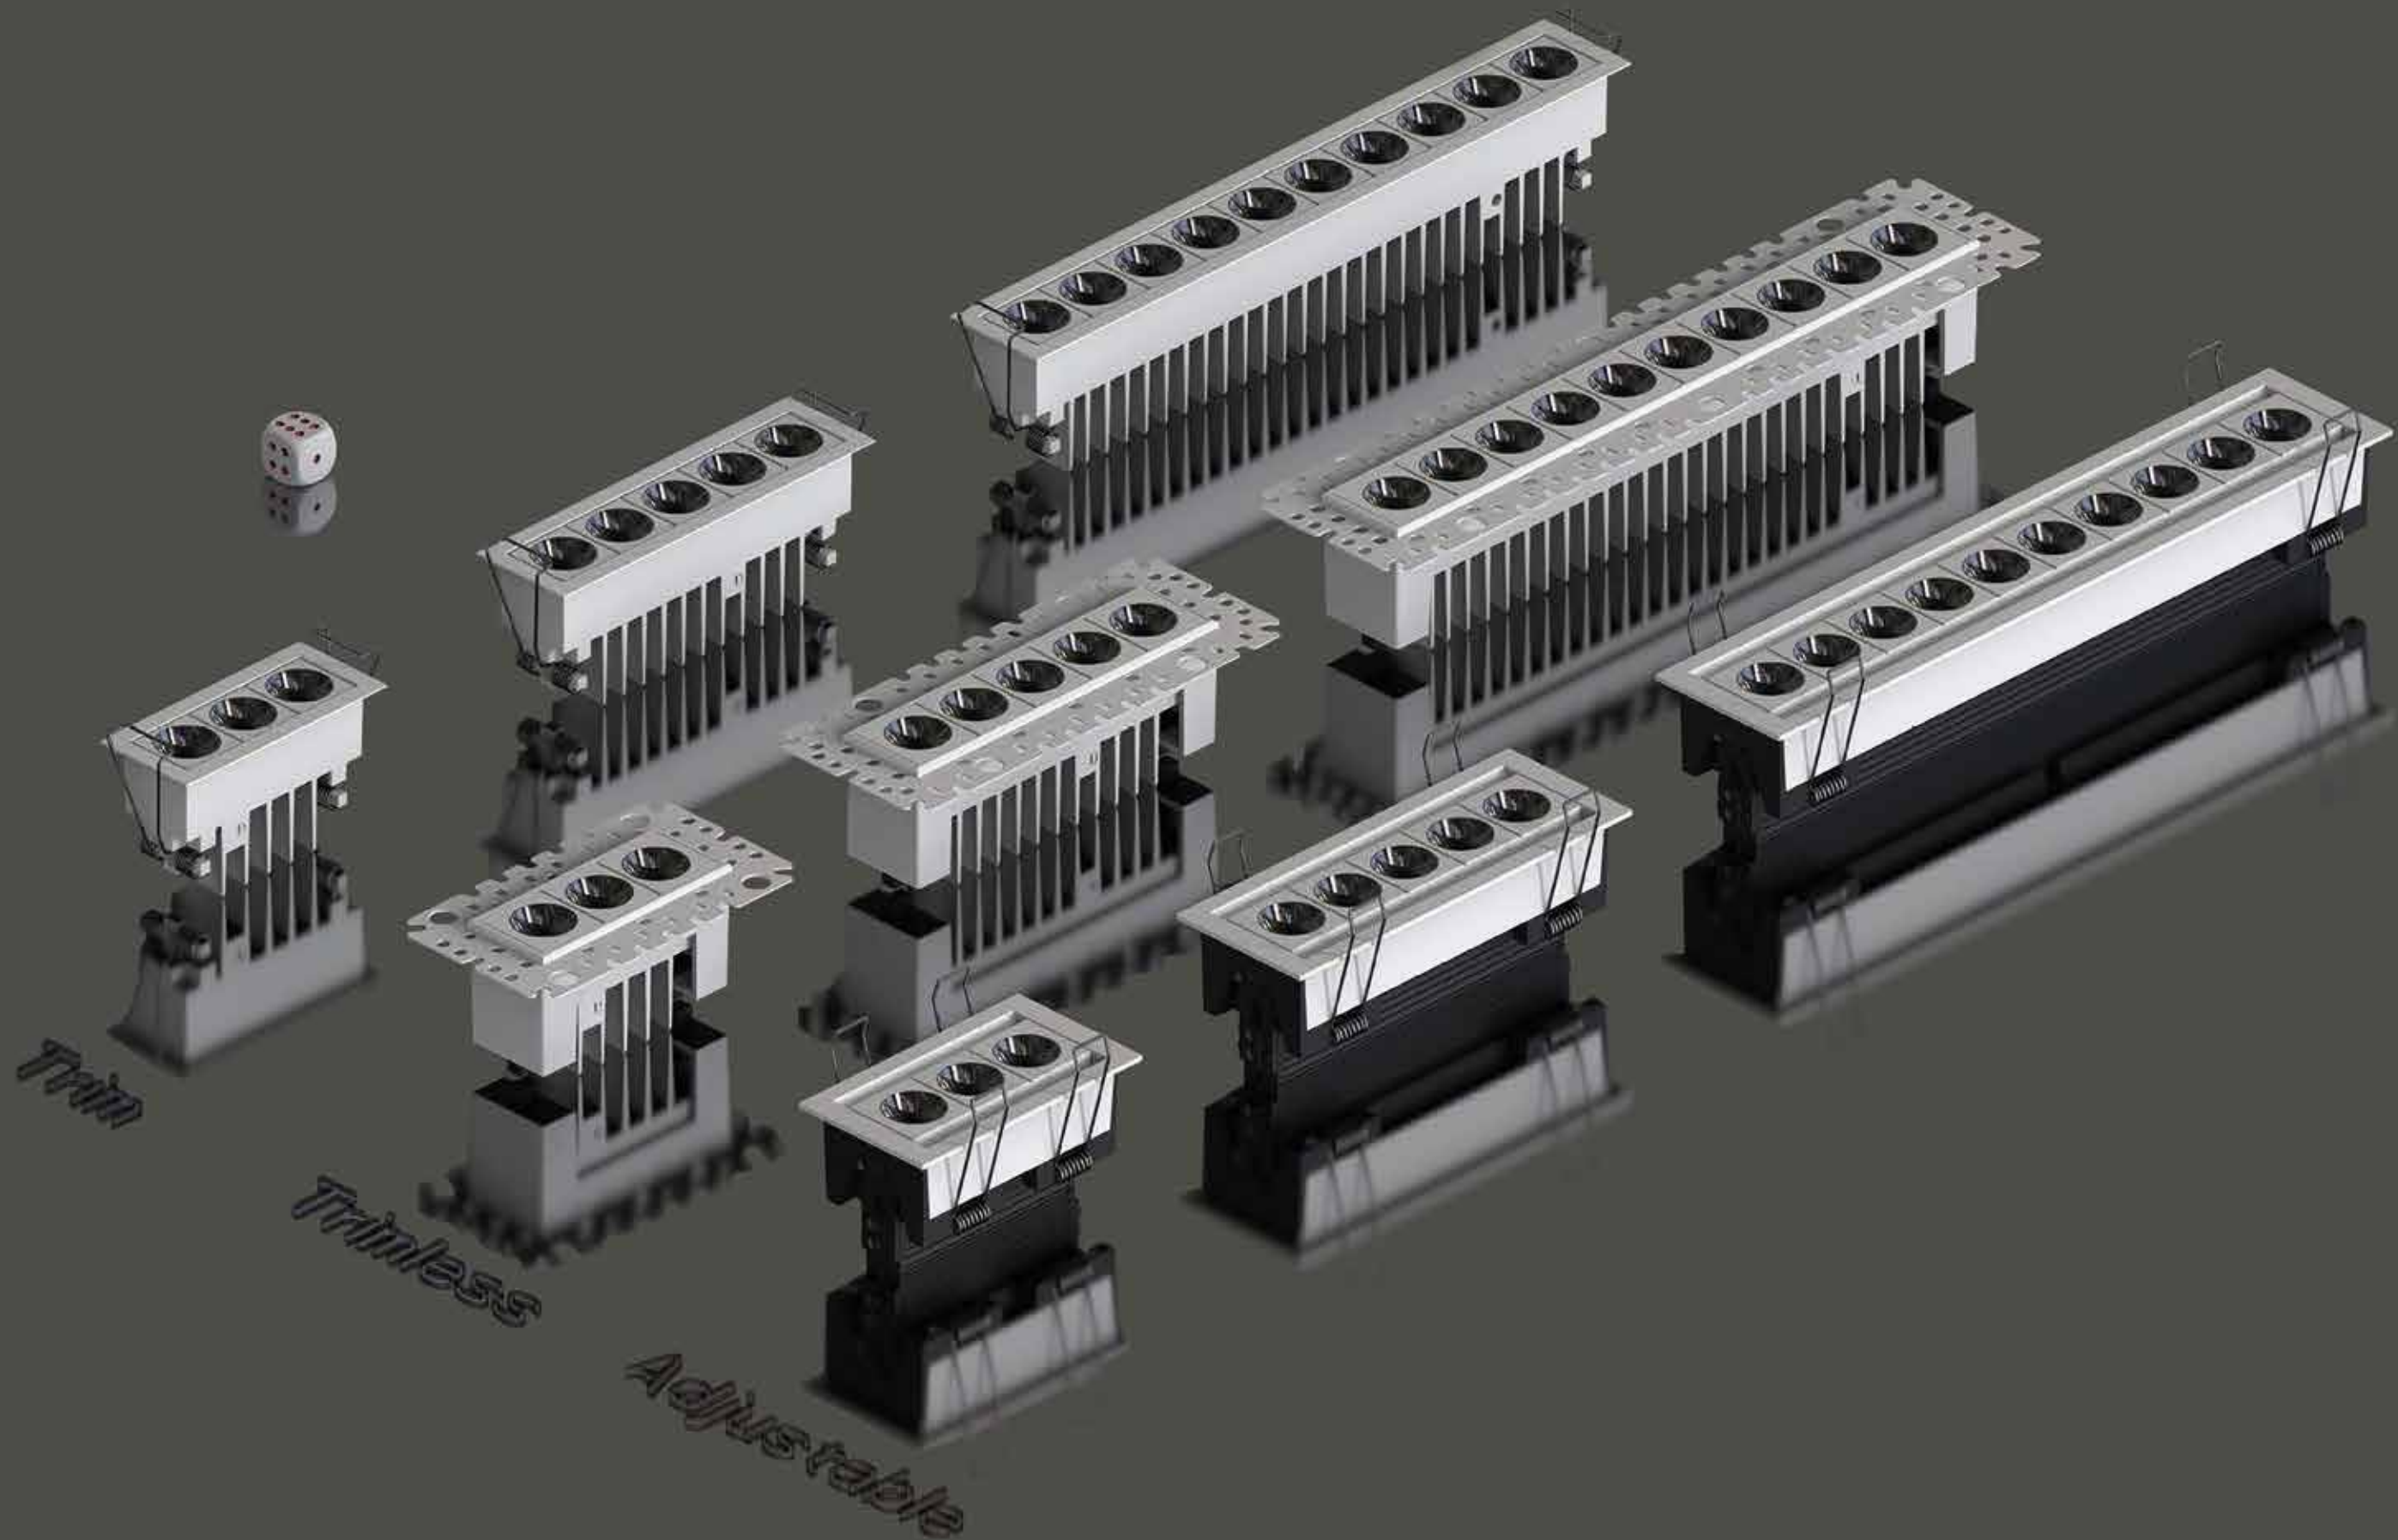

STAR LINE

			
	LX-DL-1711	LX-DL-11111	LX-DL-12111
⚡	7W	12W	24W
💡	2700K:401-446lm / 3000K:452-474lm	2700K: 647-689lm / 3000K: 739-759lm	2700K: 1295-1410lm / 3000K: 1456-1677lm
⚡	220-240VAC 50/60Hz		
🌞	OSRAM		
🌈	2700K/3000K/4000K/5000K		
Ra	>90		
📐	15°/24°/33°/13°x45°		
🔌	Remote electronic power supply		
🕒	PHASE/1-10V /DALI/BLUETOOTH		
📏			
IP20			
IP54			




STAR LINE W


			
	LX-DL-W1711	LX-DL-W11111	LX-DL-W12111
⚡	7W	12W	24W
💡	2700K:401-446lm / 3000K:452-474lm	2700K: 647-689lm / 3000K: 739-759lm	2700K: 1295-1410lm / 3000K: 1456-1677lm
⚡	220-240VAC 50/60Hz		
🌞	OSRAM		
🌈	2700K/3000K/4000K/5000K		
Ra	>90		
📐	15°/24°/33°/13°x45°		
🔌	Remote electronic power supply		
🕒	PHASE/1-10V /DALI/BLUETOOTH		
📏			
IP20			
IP54			






STAR LINE B







			
	LX-DL-1782	LX-DL-11181	LX-DL-12181
⚡	7W	12W	24W
💡	2700K:401-446lm / 3000K:452-474lm	2700K: 647-689lm / 3000K: 739-759lm	2700K: 1295-1410lm / 3000K: 1456-1677lm
🔌	220-240VAC 50/60Hz		
🌞	OSRAM		
🌈	2700K/3000K/4000K/5000K		
Ra	>90		
📏	15°/24°/33°/13°x45°		
🔌	Remote electronic power supply		
📶	PHASE/1-10V /DALI/BLUETOOTH		
📏			
📏	IP20		

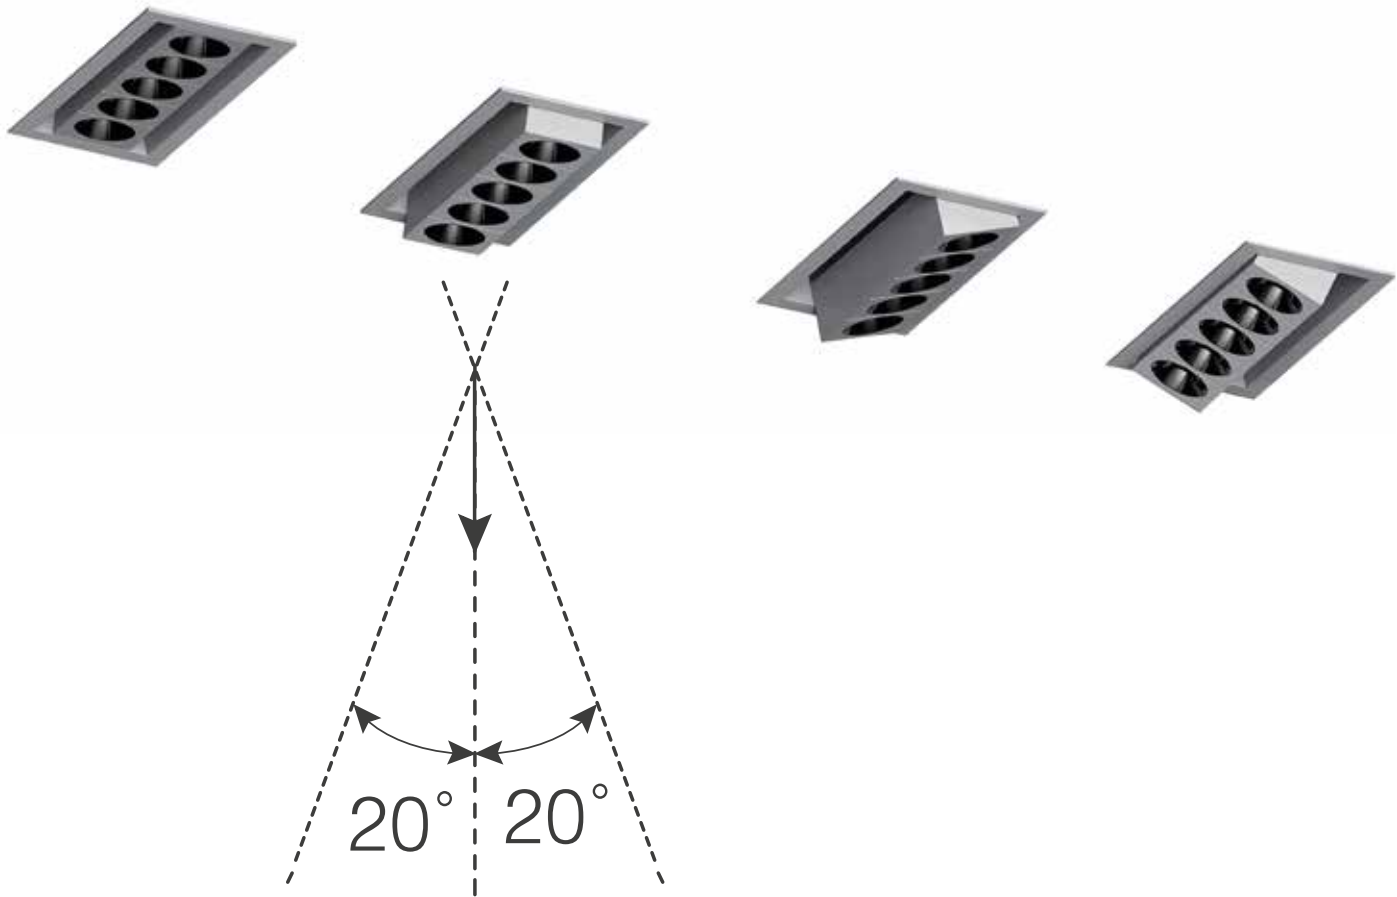

GRIDIX DOWNLIGHT



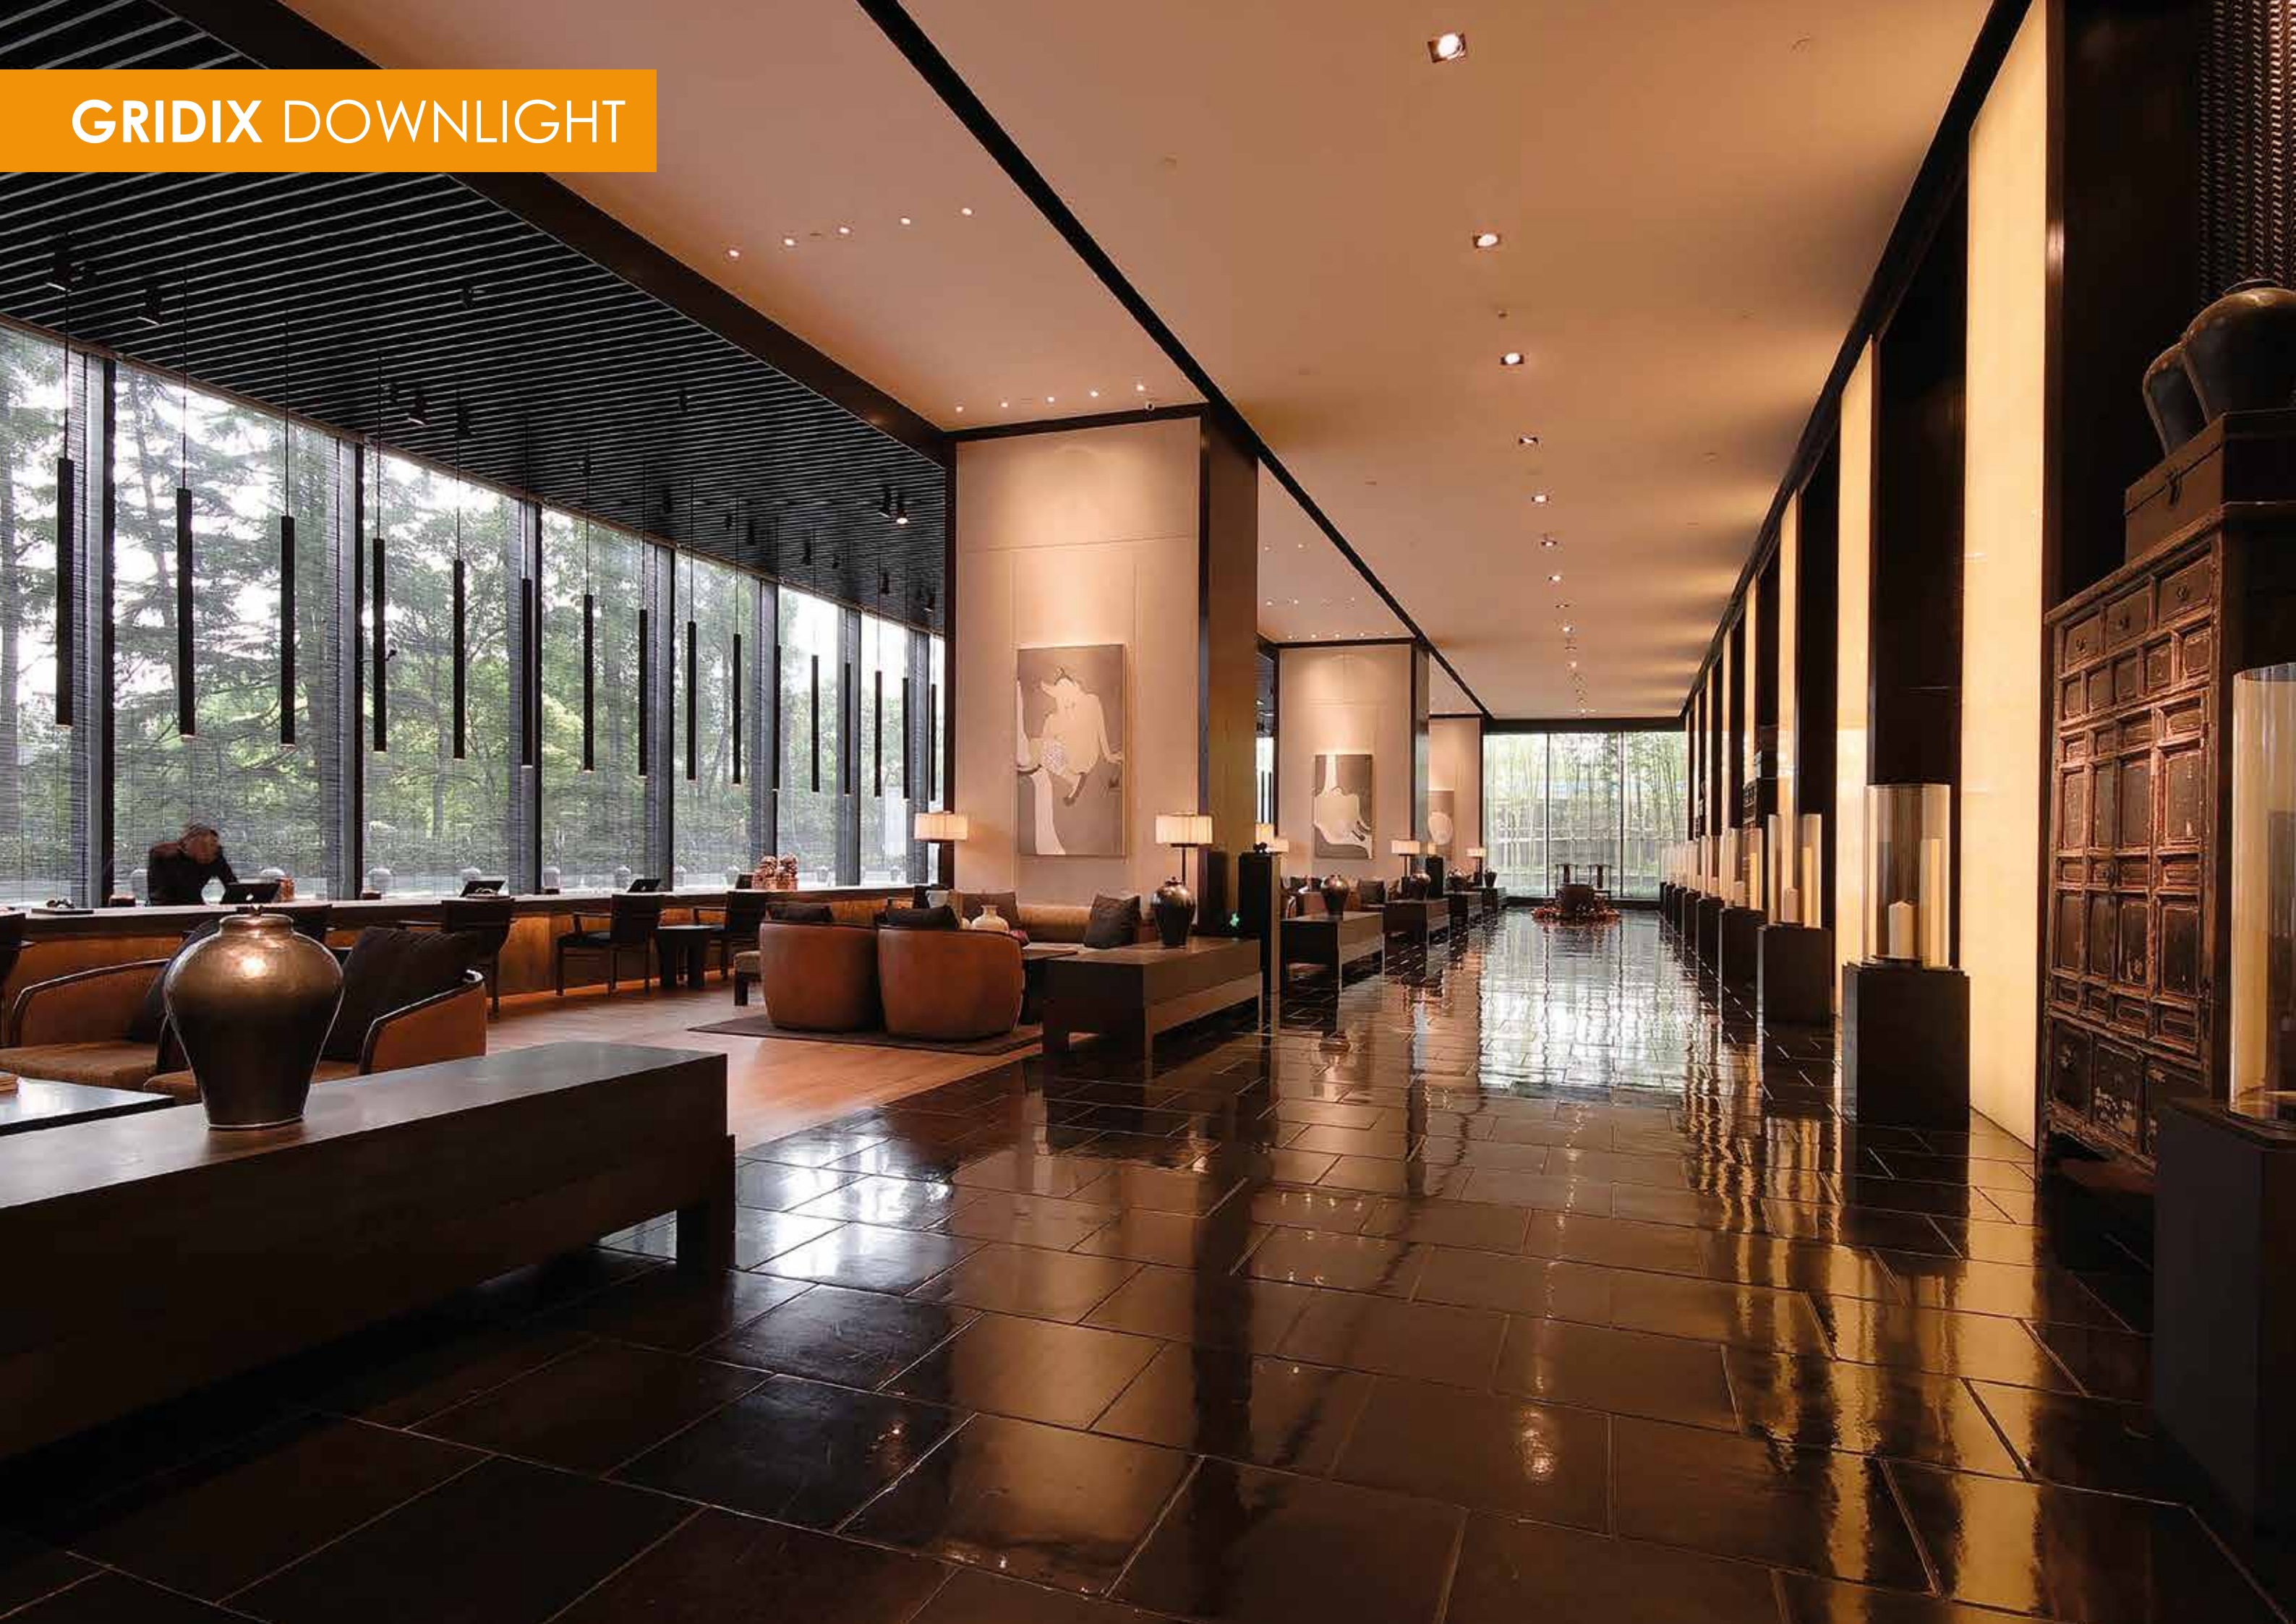


GRIDIX







						
	LX-DL-2161		LX-DL-2162		LX-DL-2163	
⚡	8W	12W	2*8W	2*12W	3*8W	3*12W
💡	2700K: 664-693lm 3000K: 687-727lm	2700K: 832-868lm 3000K: 863-921lm	2700K: 1328-1386lm 3000K: 1374-1454lm	2700K: 1664-1736lm 3000K: 1726-1842lm	2700K: 1992-2079lm 3000K: 2061-2181lm	2700K: 2496-2604lm 3000K: 2589-2763lm
🔌	220-240VAC 50/60Hz					
☀️	CITIZEN					
🌈	2700K/3000K/4000K/5000K					
Ra	≥90					
🔦	15°/24°/40°					
🔌	Remote electronic power supply					
🕒	PHASE/1-10V /DALI / BLUETOOTH					
🚫	GU10 (AC 220V) / MR16 (AC 12V)					
📏						
						
IP20						



GRIDIX W







						
	LX-DL-W2761		LX-DL-W2762		LX-DL-W2763	
⚡	8W	12W	2*8W	2*12W	3*8W	3*12W
💡	2700K: 664-693lm 3000K: 687-727lm	2700K: 832-868lm 3000K: 863-921lm	2700K: 1328-1386lm 3000K: 1374-1454lm	2700K: 1664-1736lm 3000K: 1726-1842lm	2700K: 1992-2079lm 3000K: 2061-2181lm	2700K: 2496-2604lm 3000K: 2589-2763lm
🔌	220-240VAC 50/60Hz					
☀️	CITIZEN					
🌈	2700K/3000K/4000K/5000K					
Ra	≥90					
🔦	15°/24°/40°					
🔌	Remote electronic power supply					
🕒	PHASE/1-10V /DALI / BLUETOOTH					
🚫	GU10 (AC 220V) / MR16 (AC 12V)					
📏						
	IP20					

GRIDIX A

						
	LX-DL-2261		LX-DL-2262		LX-DL-2263	
	8W	12W	2*8W	2*12W	3*8W	3*12W
	2700K: 543-638lm 3000K: 636-671lm	2700K: 756-813lm 3000K: 825-878lm	2700K: 1086-1276lm 3000K: 1272-1342lm	2700K: 1512-1626lm 3000K: 1650-1756lm	2700K: 1629-1914lm 3000K: 1908-2013lm	2700K: 2268-2439lm 3000K: 2475-2634lm
	220-240VAC 50/60Hz					
	CITIZEN					
	2700K/3000K/4000K/5000K					
Ra	≥90					
	15°/24°/40°					
	Remote electronic power supply					
	PHASE/1-10V /DALI / BLUETOOTH					
	GU10 (AC 220V) / MR16 (AC 12V)					
	 		 		 	
IP20						






GRIDIX AW

						
LX-DL-W2661		LX-DL-W2662		LX-DL-W2663		
	8W	12W	2*8W	2*12W	3*8W	3*12W
	2700K: 543-638lm 3000K: 636-671lm	2700K: 756-813lm 3000K: 825-878lm	2700K: 1086-1276lm 3000K: 1272-1342lm	2700K: 1512-1626lm 3000K: 1650-1756lm	2700K: 1629-1914lm 3000K: 1908-2013lm	2700K: 2268-2439lm 3000K: 2475-2634lm
	220-240VAC 50/60Hz					
	CITIZEN					
	2700K/3000K/4000K/5000K					
Ra	≥90					
	15°/24°/40°					
	Remote electronic power supply					
	PHASE/1-10V /DALI / BLUETOOTH					
	GU10 (AC 220V) / MR16 (AC 12V)					
	 		 		 	
						

GRIDIX B

GRIDIX BW

GRIDIX BL




												
LX-DL-2811 / LX-DL-W2811						LX-DL-2911						
⚡	15W		20W		25W		25W		30W			
💡	2700K: 1183-1211lm / 3000K: 1220-1229lm		2700K: 1623-1657lm / 3000K: 1639-1679lm		2700K: 1925-1938lm / 3000K: 1928-1972lm		2700K: 2125-2170lm 3000K: 2180-2208lm		2700K: 2411-2453lm 3000K: 2470-2542lm			
🔌	220-240VAC 50/60Hz											
🌞	CITIZEN											
🌈	2700K/3000K/4000K/5000K											
Ra	≥90											
🔦	12°/24°/48°/62°											
🔌	Remote electronic power supply											
📶	PHASE/1-10V /DALI / BLUETOOTH											
📏	LX-DL-2811 Cut-out:120x120mm 				LX-DL-W2811 Cut-out:124x124mm 				LX-DL-2911 Cut-out:156x156mm 			
	IP20											



GRIDIX B

GRIDIX BW




GRIDIX BL

											
LX-DL-2812 / LX-DL-W2812						LX-DL-2912					
⚡	2*15W		2*20W		2*25W		2*25W		2*30W		
💡	2700K: 2366-2422lm / 3000K: 2440-2458lm		2700K: 3246-3314lm / 3000K: 3278-3358lm		2700K: 3850-3876lm / 3000K: 3856-3944lm		2700K: 4250-4340lm 3000K: 4360-4416lm		2700K: 4822-4906lm 3000K: 4940-5084lm		
🔌	220-240VAC 50/60Hz										
🌞	CITIZEN										
🌈	2700K/3000K/4000K/5000K										
Ra	≥90										
🔦	12°/24°/48°/62°										
🔌	Remote electronic power supply										
📶	PHASE/1-10V /DALI / BLUETOOTH										
LX-DL-2812  135mm 130mm 235mm LX-DL-W2812  128mm 120mm 227mm LX-DL-2912  150mm 166mm 318mm											
IP20											





GRIDIX B





GRIDIX BW

GRIDIX BL

					
	LX-DL-2813 / LX-DL-W2813			LX-DL-2913	
⚡	3*15W	3*20W	3*25W	3*25W	3*30W
💡	2700K: 3549-3633lm / 3000K: 3660-3687lm	2700K: 4869-4971lm / 3000K: 4917-5037lm	2700K: 5775-5814lm / 3000K: 5784-5916lm	2700K: 6375-6510lm 3000K: 6540-6624lm	2700K: 7233-7359lm 3000K: 7410-7626lm
🔌	220-240VAC 50/60Hz				
🌞	CITIZEN				
🌈	2700K/3000K/4000K/5000K				
Ra	≥90				
🔦	12°/24°/48°/62°				
🔌	Remote electronic power supply				
🔄	PHASE/1-10V /DALI / BLUETOOTH				
	LX-DL-2813 		LX-DL-W2813 		LX-DL-2913 
IP20					



		Optional Accessories  Honeycomb LouverGlass filterSpecularBlack chromeGoldWhiteBlack				
LX-DL-2921			LX-DL-21301			
	5W	7W	8W	10W	12W	15W
	2700K:282-360lm 3000K:321-390lm	2700K:338-432lm 3000K:383-468lm	2700K:621-671lm 3000K:642-693lm	2700K:696-789lm 3000K:753-799lm	2700K:821-932lm 3000K:837-888lm	2700K:889-1020lm 3000K:939-1033lm
	220-240VAC 50/60Hz					
	CITILED					
	2700K/3000K/4000K					
	≥90					
	15°/20°/25°/30°		15°/24°/38°			
	Remote electronic power supply					
	PHASE/1-10V /DALI / BLUETOOTH					
	Cut-out:84x84mm  thickness 5-20mm 		Cut-out:125x125mm  thickness 5-20mm 			
	IP20					
	IP54					

		Optional Accessories  Honeycomb LouverGlass filterSpecularBlack chromeGoldWhiteBlack				
LX-DL-W2921			LX-DL-W21301			
	5W	7W	8W	10W	12W	15W
	2700K:282-360lm 3000K:321-390lm	2700K:338-432lm 3000K:383-468lm	2700K:621-671lm 3000K:642-693lm	2700K:696-789lm 3000K:753-799lm	2700K:821-932lm 3000K:837-888lm	2700K:889-1020lm 3000K:939-1033lm
	220-240VAC 50/60Hz					
	CITILED					
	2700K/3000K/4000K					
	≥90					
	15°/20°/25°/30°		15°/24°/38°			
	Remote electronic power supply					
	PHASE/1-10V /DALI / BLUETOOTH					
	Cut-out:96x96mm  thickness 5-20mm 		Cut-out:130x130mm  thickness 5-20mm 			
	IP20					
	IP54					



GRIDIX C

Optional Accessories

Honeycomb Louver

Glass filter



Specular

Black chrome

Gold

White

Black

	LX-DL-2922		LX-DL-21302			
	2*5W	2*7W	2*8W	2*10W	2*12W	2*15W
	2700K:564-720lm 3000K:642-780lm	2700K:676-864lm 3000K:766-936lm	2700K:1242-1342lm 3000K:1284-1386lm	2700K:1392-1578lm 3000K:1506-1598lm	2700K:1642-1864lm 3000K:1674-1776lm	2700K:1778-2040lm 3000K:1878-2066lm
	220-240VAC 50/60Hz					
	CITILED					
	2700K/3000K/4000K					
Ra	≥90					
	15°/20°/25°/30°		15°/24°/38°			
	Remote electronic power supply					
	PHASE/1-10V /DALI / BLUETOOTH					
	Cut-out:172x84mm thickness 5-20mm 		Cut-out:230x125mm thickness 5-20mm 			
	IP20					
	IP54					



GRIDIX CW

Optional Accessories

Honeycomb Louver

Glass filter





Specular

Black chrome

Gold

White

Black



	LX-DL-W2922		LX-DL-W21302			
	2*5W	2*7W	2*8W	2*10W	2*12W	2*15W
	2700K:564-720lm 3000K:642-780lm	2700K:676-864lm 3000K:766-936lm	2700K:1242-1342lm 3000K:1284-1386lm	2700K:1392-1578lm 3000K:1506-1598lm	2700K:1642-1864lm 3000K:1674-1776lm	2700K:1778-2040lm 3000K:1878-2066lm
	220-240VAC 50/60Hz					
	CITILED					
	2700K/3000K/4000K					
Ra	≥90					
	15°/20°/25°/30°		15°/24°/38°			
	Remote electronic power supply					
	PHASE/1-10V /DALI / BLUETOOTH					
	Cut-out:175x84mm  		Cut-out:248x130mm  			
	IP20					
	IP54					






GRIDIX C







	LX-DL-2923		LX-DL-21303			
⚡	3*5W	3*7W	3*8W	3*10W	3*12W	3*15W
💡	2700K:846-1080lm 3000K:963-1170lm	2700K:1014-1296lm 3000K:1149-1404lm	2700K:1863-2013lm 3000K:1926-2079lm	2700K:2088-2367lm 3000K:2259-2367lm	2700K:2463-2796lm 3000K:2511-2664lm	2700K:2667-3060lm 3000K:2817-3099lm
🔌	220-240VAC 50/60Hz					
☀️	CITILED					
🌈	2700K/3000K/4000K					
Ra	≥ 90					
📐	15°/20°/25°/30°		15°/24°/38°			
🔌	Remote electronic power supply					
📶	PHASE/1-10V /DALI / BLUETOOTH					
📏	Cut-out:258x84mm thickness 5-20mm 		Cut-out:344x125mm thickness 5-20mm 			
	IP20					
	IP54					




GRIDIX CW



	LX-DL-W2923		LX-DL-W21303			
⚡	3*5W	3*7W	3*8W	3*10W	3*12W	3*15W
💡	2700K:846-1080lm 3000K:963-1170lm	2700K:1014-1296lm 3000K:1149-1404lm	2700K:1863-2013lm 3000K:1926-2079lm	2700K:2088-2367lm 3000K:2088-2367lm	2700K:2463-2796lm 3000K:2511-2664lm	2700K:2667-3060lm 3000K:2817-3099lm
🔌	220-240VAC 50/60Hz					
🌞	CITILED					
🌈	2700K/3000K/4000K					
Ra	≥ 90					
📐	15°/20°/25°/30°		15°/24°/38°			
🔌	Remote electronic power supply					
📶	PHASE/1-10V /DALI / BLUETOOTH					
📏	Cut-out:260x84mm  		Cut-out:362x130mm  			
	IP20					
	IP54					


CLASSY DOWNLIGHT

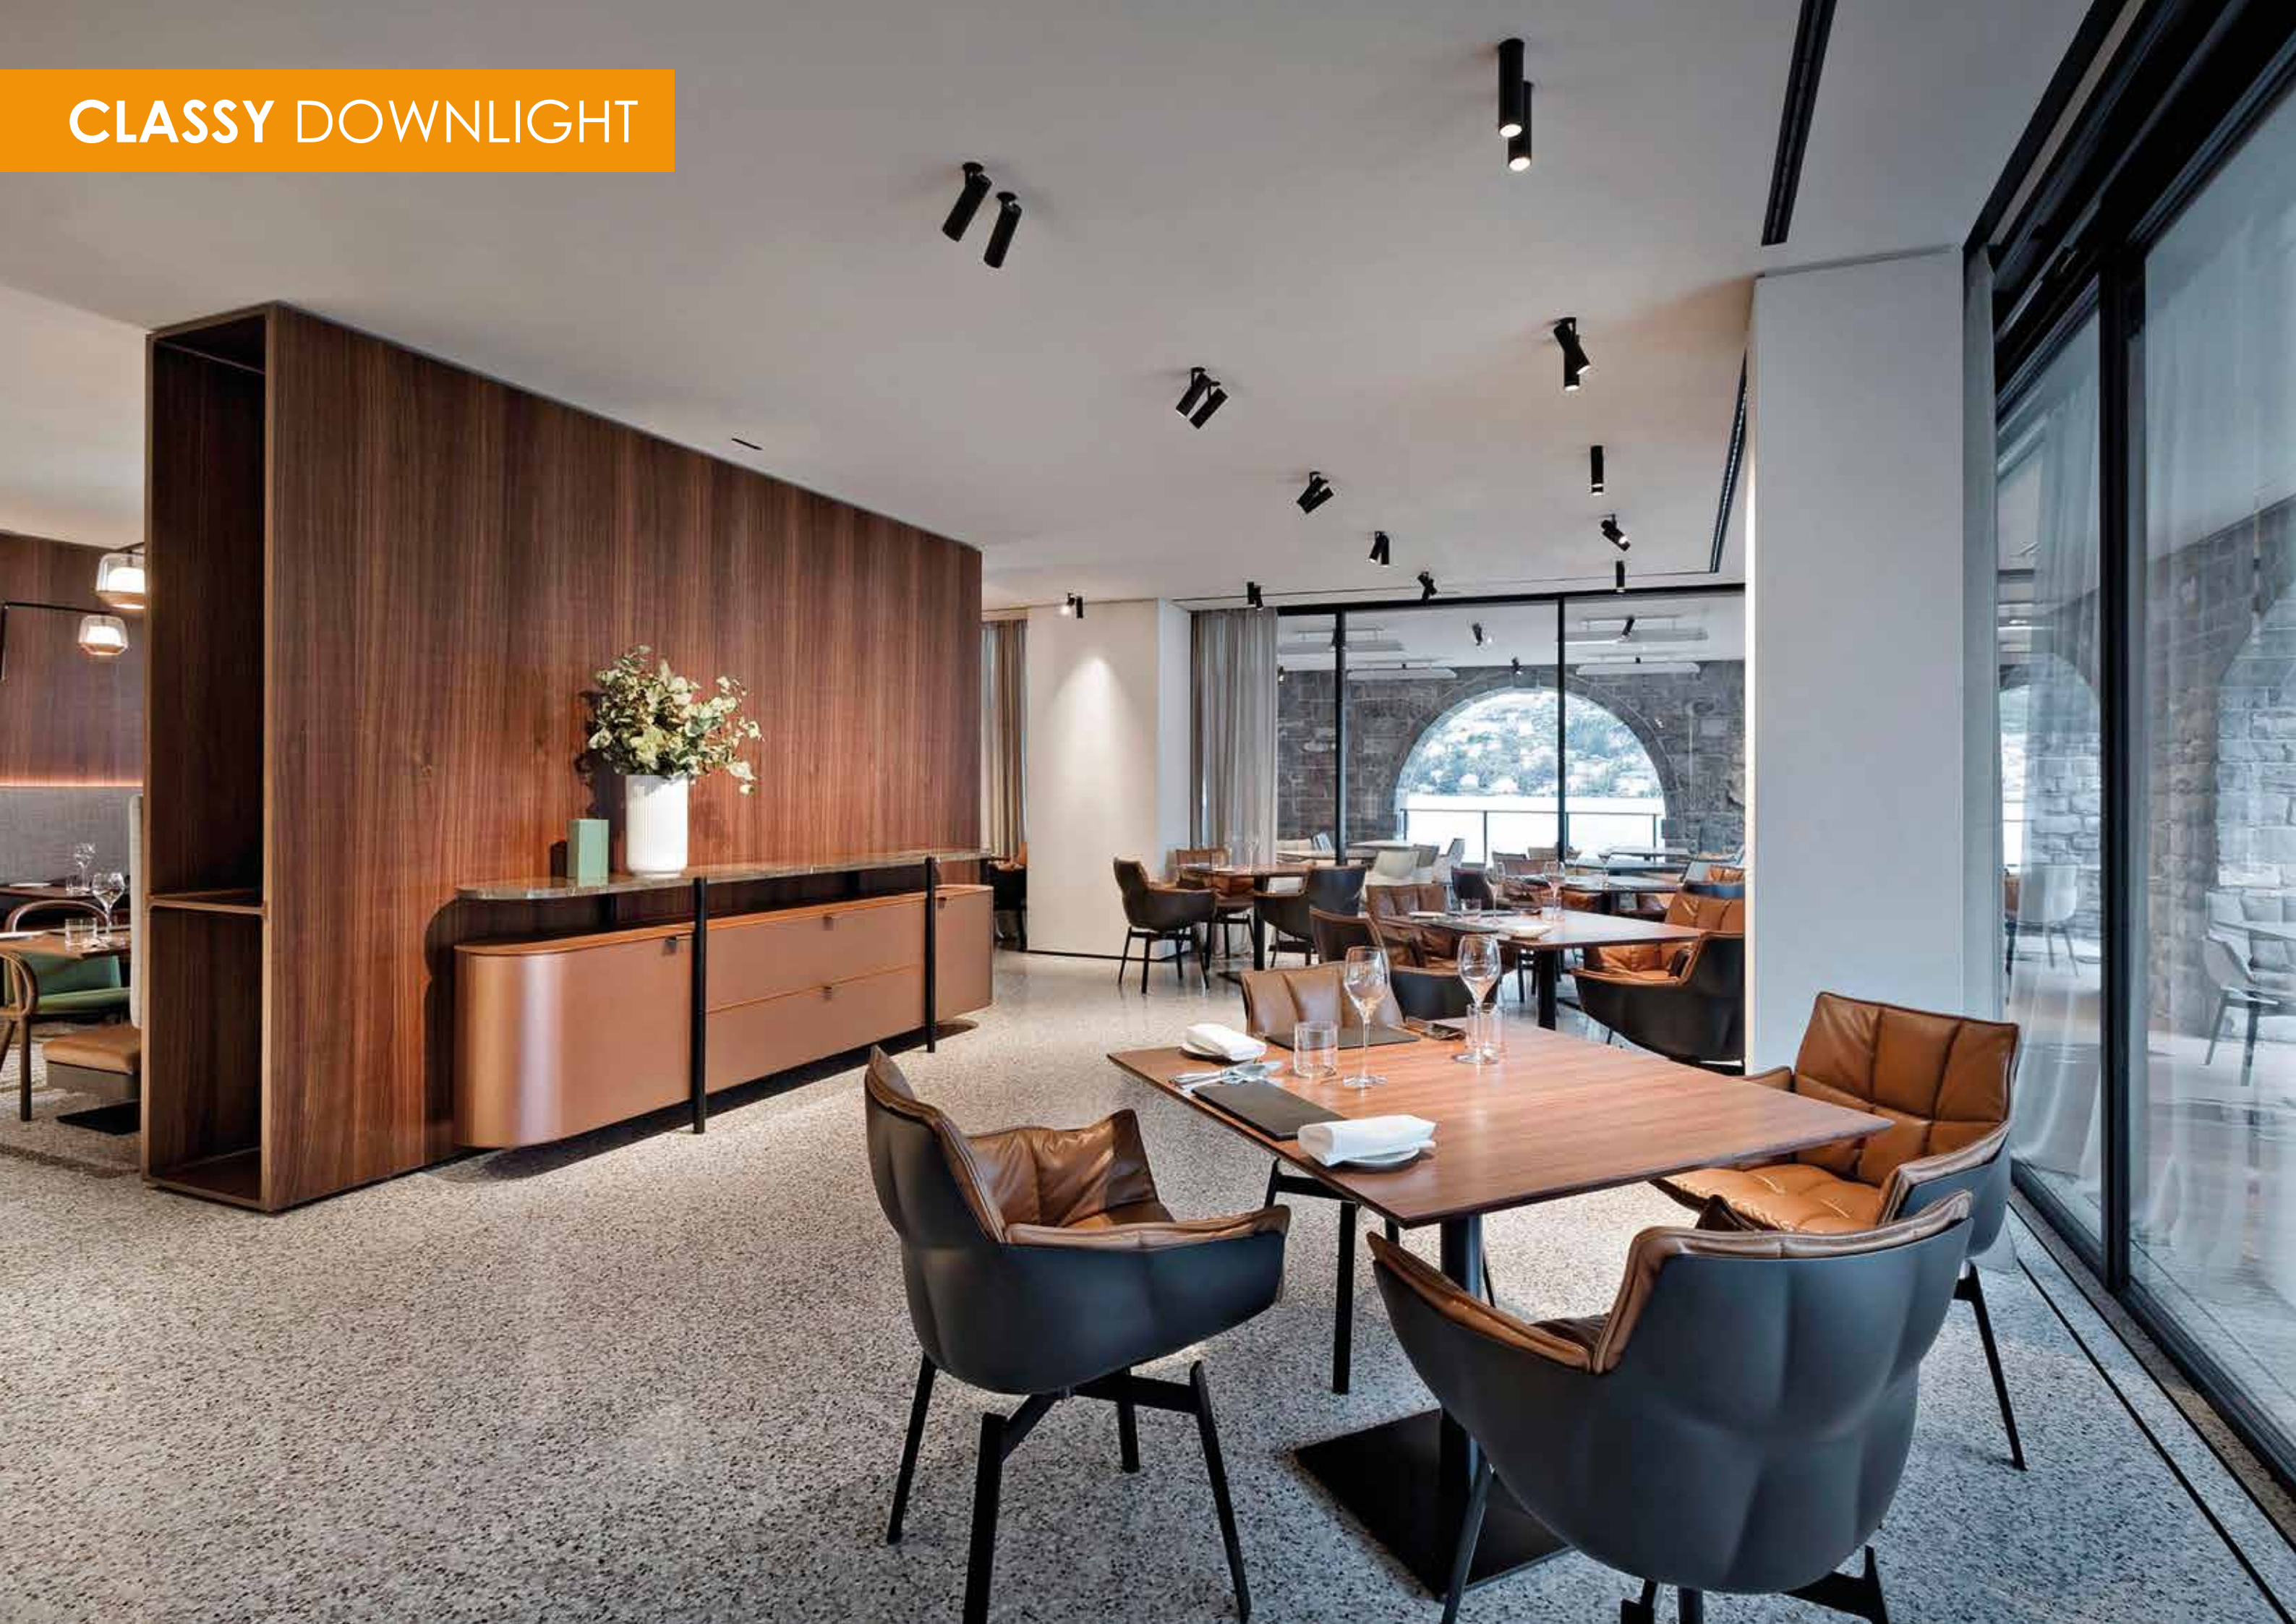


ZOOM







LX-DL-11051

	9W
	3000K : 609-634lm
	220-240VAC 50/60Hz
	CITIZEN
	2700K/3000K/4000K/5000K
Ra	≥90
	12°/24°/48°/62°
	Remote electronic power supply
	PHASE/1-10V /DALI / BLUETOOTH
	Cut-out:φ93mm   φ105mm
IP20	




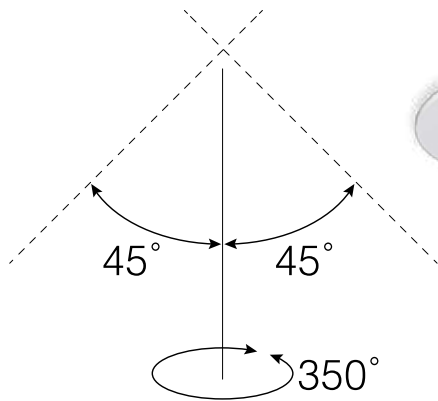


SMART

				
	LX-DL-2090A	LX-DL-21120A	LX-DL-2090AS	LX-DL-21120AS
	12W	25W	12W	25W
	780Lm	1625Lm	780Lm	1625Lm
	220-240VAC 50/60Hz			
	CREE COB			
	2700K/3000K/4000K			
Ra	≥90			
	15°/24°/36°			
	Remote electronic power supply			
	PHASE/0/1-10V /DALI as options			
				
IP20				



SMART

				
	LX-DL-20175AS	LX-DL-21230AS	LX-DL-20260AS	LX-DL-21335AS
	2x12W	2x25W	3x12W	3x25W
	2x780Lm	2x1625Lm	3x780Lm	3x1625Lm
	220-240VAC 50/60Hz			
	CREE COB			
	2700K/3000K/4000K			
Ra	≥90			
	15°/24°/36°			
	Remote electronic power supply			
	PHASE/0/1-10V /DALI as options			
				
	IP20			





FALLON / MIGNON L

	LX-DL-8606	LX-DL-8607	LX-DL-8608	LX-DL-8609	LX-DL-8603	LX-DL-8604	LX-DL-8605
	8W	2*8W	3*8W	4*8W	8W	2*8W	3*8W
	378-393lm	756-786lm	1134-1179lm	1512-1572lm	378-393lm	756-786lm	1134-1179lm
	220-240VAC 50/60Hz						
	LUMENS						
	2700K/3000K/4000K						
Ra	≥80 / ≥90 / ≥97						
	20° / 24° / 38° / 52°						
	Remote electronic power supply						
	PHASE						
	GU10						
IP20							

Surface mounted
White + Black



Recessed
Black + Gold



MIGNON P

	LX-DL-8602	LX-DL-2602
	8W	8W
	378-393lm	378-393lm
	220-240VAC 50/60Hz	220-240VAC 50/60Hz
	LUMENS	LUMENS
	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Ra	≥80 / ≥90 / ≥97	≥80 / ≥90 / ≥97
	20° / 24° / 38° / 52°	20° / 24° / 38° / 52°
	Remote electronic power supply	Remote electronic power supply
	PHASE	PHASE
	GU10	GU10
IP20		









SPOTLIGHT

	LX-DL-2502				LX-DL-2702		
⚡	8W	10W	12W	15W	15W	20W	25W
💡	2700K:630-661lm 3000K:632-664lm	2700K:705-734lm 3000K:740-779lm	2700K:802-825lm 3000K:821-864lm	2700K:895-922lm 3000K:920-971lm	2700K:945-1064lm 3000K:1072-1122lm	2700K:1303-1468lm 3000K:1500-1570lm	2700K:1622-1760lm 3000K:1716-1803lm
🔌	220-240VAC 50/60Hz						
☀️	CITIZEN						
🌈	2700K/3000K/4000K/5000K						
Ra	>90						
📏	15°/24°/38°						
🔌	Remote electronic power supply						
🕒	PHASE/1-10V /DALI						
📏							
	IP20						





RADAR S

	LX-DL-2351	LX-DL-2353	LX-DL-2352	LX-DL-2505
	7W		2* 7W	12W
	446-469lm		892-938lm	812-850lm
	220-240VAC 50/60Hz			
	CITILED			
	2700K/3000K/4000K			
Ra	≥ 80 / ≥ 90 / ≥ 97			
	15° / 24° / 33°			15° / 24° / 38°
	Remote electronic power supply			
	PHASE/1-10V /DALI / Bluetooth			
				
				
IP20				















RADAR L

	LX-DL-8352	LX-DL-8353	LX-DL-8502
	7W		12W
	446-469lm		812-850lm
	220-240VAC 50/60Hz		
	CITILED		
	2700K/3000K/4000K		
Ra	≥90		
	15°/24°/33°		15°/24°/38°
	Remote electronic power supply		
	PHASE/1-10V /DALI / Bluetooth		
IP20			





					
SPY / SPY W					
HOUSING'S COLOR					
  					
	LX-DL-2675A	LX-DL-W2675AT	LX-DL-2690A	LX-DL-W2690AT	LX-DL-26105A LX-DL-W26105AT
⚡	3W		7W		18W
💡	180 lm		420 lm		1080 lm
🔌	220-240VAC 50/60Hz				
🌞	Cree				
🌈	2700K / 3000K / 4000K				
Ra	≥ 90				
📐	15° / 24° / 36°		15° / 24° / 36° / Random beam angle:15°-36°		
🔌	Remote electronic power supply				
📶	PHASE/1-10V /DALI as options				
					
					
					 
IP20					

	LX-DL-27110A	LX-DL-W27110AT	LX-DL-26135A	LX-DL-W26135AT	LX-DL-25165A	LX-DL-W25165AT
⚡	6W		14W		36W	
💡	360 lm		840 lm		2160 lm	
🔌	220-240VAC 50/60Hz					
🌞	Cree					
🌈	2700K / 3000K / 4000K					
Ra	≥ 90					
📐	15° / 24° / 36°		15° / 24° / 36° / Random beam angle:15°~36°			
🔌	Remote electronic power supply					
📶	PHASE/1-10V /DALI as options					
📏						
	☝ Φ110	☝ Φ110	☝ Φ135	☝ Φ135	☝ Φ165	☝ Φ165
						
IP20						








TECO

HOUSING'S COLOR



	LX-DL-2550A	LX-DL-2560A	LX-DL-2575A
⚡	3W	7W	18W
💡	180 lm	420 lm	1080 lm
🔌	220-240VAC 50/60Hz		
☀️	Cree		
🌈	2700K / 3000K / 4000K		
Ra	≥90		
📐	15° / 24° / 36°	15° / 24° / 36° / Random beam angle:15°-36°	
🔧	Remote electronic power supply		
🔄	PHASE/1-10V /DALI as options		
📏			
			
IP20			








POLY R

HOUSING'S COLOR











	LX-DL-2240A	LX-DL-2340A	LX-DL-2440A
⚡	3W	7W	18W
💡	180 lm	420 lm	1080 lm
🔌	220-240VAC 50/60Hz		
🌞	Cree		
🌈	2700K / 3000K / 4000K		
Ra	≥ 90		
☞	15° / 24° / 36°	15° / 24° / 36° / Random beam angle:15°~36°	
🔌	Remote electronic power supply		
🕒	PHASE/1-10V /DALI as options		
📏			
			
IP20			



POLY/ POLY B

HOUSING'S COLOR





	LX-DL-0203A	LX-DL-0207A	LX-DL-0218A	LX-DL-0603A	LX-DL-0607A	LX-DL-0618A				
⚡	3W	7W	18W	3W	7W	18W				
💡	180 lm	420 lm	1080 lm	180 lm	420 lm	1080 lm				
🔌	220-240VAC 50/60Hz									
🌞	Cree									
🌈	2700K / 3000K / 4000K									
Ra	≥90									
📐	15° / 24° / 36°	15° / 24° / 36° / Random beam angle:15°-36°		15° / 24° / 36°	15° / 24° / 36° / Random beam angle:15°-36°					
🔌	Remote electronic power supply									
📷	PHASE/1-10V /DALI as options									
📏	 141 L Ø43 J	 176 L Ø55 J	 267 L Ø70 J	 139 L Ø33 J	 161 L Ø45 J	 255 L Ø60 J				
										
IP20										









MEGA

HOUSING'S COLOR






	LX-DL-0407A	LX-DL-0514A	LX-DL-0418A	LX-DL-0536A
⚡	7W	14W	18W	36W
💡	420 lm	820 lm	1080 lm	2160 lm
🔌	220-240VAC 50/60Hz			
🌞	Cree			
🌈	2700K / 3000K / 4000K			
Ra	≥90			
📐	15° / 24° / 36° / Random beam angle:15°-36°			
🔌	Remote electronic power supply			
📷	PHASE/1-10V /DALI as options			
📏	 153 L Ø45 J	 153 L Ø45 J	 244 L Ø60 J	 244 L Ø60 J
				
IP20				







MERA

				
	LX-DL-2751	LX-DL-8751	LX-DL-21001	LX-DL-81001
	7W		15W	
	3000K : 455-478lm		3000K : 909-926lm	
	220-240VAC 50/60Hz			
	CITIZEN			
	2700K/3000K/4000K/5000K			
Ra	≥90			
	18°/40°		18°/25°/36°/60°	
	Remote electronic power supply			
	PHASE/1-10V /DALI / BLUETOOTH			
				
IP20				



MONTI

	LX-DL-8501	LX-DL-8601	LX-DL-8701
	8W	15W	20W
	614-645lm	1130-1215lm	1325-1407lm
	220-240VAC 50/60Hz		
	CITIZEN		
	2700K/3000K/4000K/5000K		
Ra	≥80 / ≥90		
	20°/30°	15°/23°/36°	15°/20°/33°
	Remote electronic power supply		
	PHASE/1-10V /DALI / Bluetooth		
			
IP20			

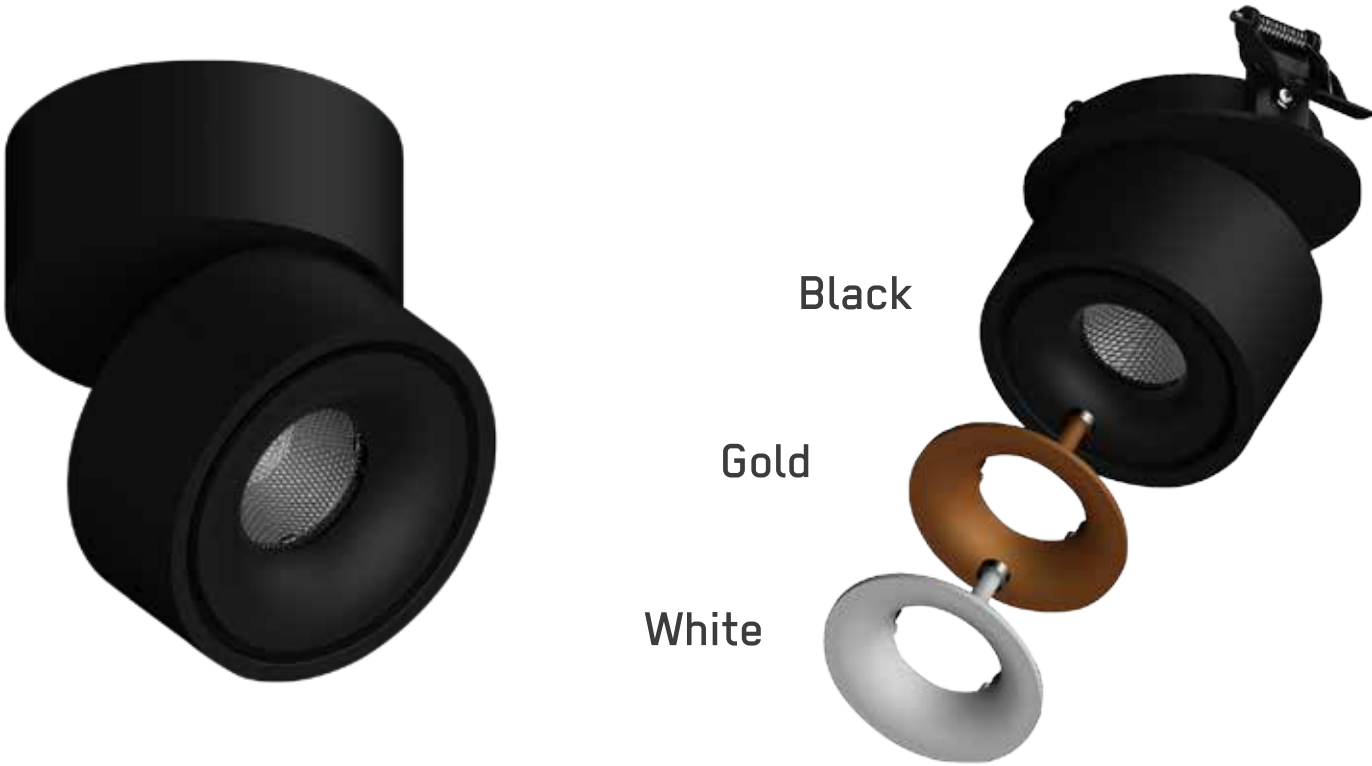

TUBE R

COLOUR(REFLECTOR)

	LX-DL-8901			LX-DL-8906	LX-DL-81241			LX-DL-81243				
⚡	8W	12W	15W	10W	15W	20W	25W	15W				
💡	2700K:572-648lm 3000K:576-660lm	2700K:801-973lm 3000K:829-1010lm	2700K:868-1081lm 3000K:900-1101lm	2700K:686-824lm 3000K:699-853lm	2700K:1035-1122lm 3000K:1072-1151lm	2700K:1473-1544lm 3000K:1551-1719lm	2700K:1689-1821lm 3000K:1762-1972lm	2700K:1035-1122lm 3000K:1072-1151lm				
🔌	220-240VAC 50/60Hz											
🌞	Citizen											
🌈	2700K/3000K/4000K/5000K											
Ra	≥90											
📐	24°/38°/60°				15°/24°/38°/60°							
🔌	Remote electronic power supply											
📷	PHASE /1-10V / DALI as options											
📏												
📦	IP20											









TUBE S

COLOUR(REFLECTOR)






	LX-DL-8902			LX-DL-8905	LX-DL-81242			LX-DL-81244
⚡	8W	12W	15W	10W	15W	20W	25W	15W
💡	2700K:572-648lm 3000K:576-660lm	2700K:801-973lm 3000K:829-1010lm	2700K:868-1081lm 3000K:900-1101lm	2700K:686-824lm 3000K:699-853lm	2700K:1035-1122lm 3000K:1072-1151lm	2700K:1473-1544lm 3000K:1551-1719lm	2700K:1689-1821lm 3000K:1762-1972lm	2700K:1035-1122lm 3000K:1072-1151lm
🔌	220-240VAC 50/60Hz							
☀️	Citizen							
🌈	2700K/3000K/4000K/5000K							
Ra	≥90							
🔦	24°/38°/60°				15°/24°/38°/60°			
🔋	Remote electronic power supply							
📶	PHASE /1-10V / DALI as options							
📏								
🛡️	IP20							



Suspension version is available for maximum flexibility



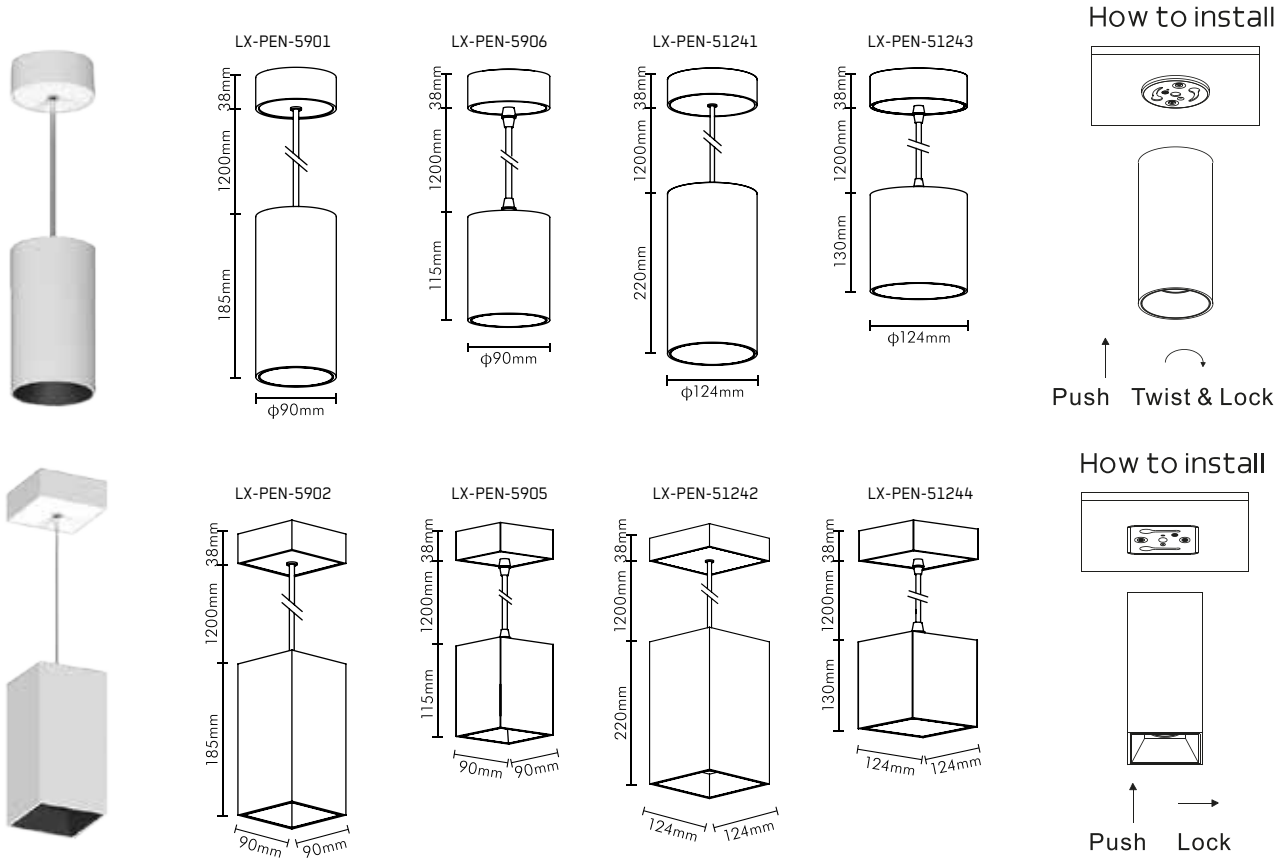


TUBE R-IP65 TUBE S-IP65



	LX-DL-89010	LX-DL-81245	LX-DL-8909	LX-DL-81246
⚡	8W	15W	8W	15W
💡	2700K:572-648lm 3000K:576-660lm	2700K:1035-1122lm 3000K:1072-1151lm	2700K:572-648lm 3000K:576-660lm	2700K:1035-1122lm 3000K:1072-1151lm
🔌	220-240VAC 50/60Hz			
🌞	Citizen			
🌈	2700K/3000K/4000K/5000K			
Ra	≥90			
🔦	15°/24°/38°/60°			
🔌	Remote electronic power supply			
📷	PHASE /1-10V / DALI as options			
📏				
🏠	IP20			
🏠	IP65			



				
HUBBLE				
	LX-DL-14082F	LX-DL-14115F	LX-DL-14150F	LX-DL-14190F
⚡	10W	20W	30W	40W
☀	887Lm	1413Lm	1813Lm	2362Lm
🔌	220-240VAC 50/60Hz			
🌞	CREE COB			
🌈	2700K/3000K/4000K			
Ra	≥90			
📏	45°			
🔌	Remote electronic power supply			
🕒	PHASE/0/1-10V /DALI as options			
📏				
				
IP54				


IP54










LYRA





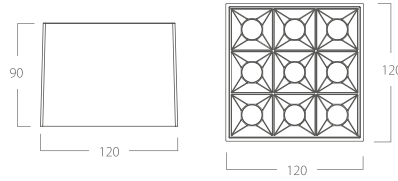	LX-DL-15082FS	LX-DL-15120FS
	15W	36W
	975Lm	2340Lm
	220-240VAC 50/60Hz	
	CREE COB	
	2700K/3000K/4000K	
Ra	≥90	
	12°/23°/38°/50°	
	Remote electronic power supply	
	PHASE/0/1-10V /DALI as options	
		
		
IP20		





	LX-DL-2503				LX-DL-2703	
⚡	8W	10W	12W	15W	15W	20W
💡	2700K:630-661lm 3000K:632-664lm	2700K:705-734lm 3000K:740-779lm	2700K:802-825lm 3000K:821-864lm	2700K:895-922lm 3000K:920-971lm	2700K: 945-1064lm 3000K: 1072-1122lm	2700K: 1303-1468lm 3000K: 1500-1570lm
🔌	220-240VAC 50/60Hz					
🌞	Citizen					
🌈	2700K/3000K/4000K/5000K					
Ra	≥90					
📐	15°/24°/38°					
🔌	Remote electronic power supply					
🔄	PHASE /1-10V / DALI as options					
📏						
IP20						







DOBSON

OPTIONAL COLOR



	LX-PEN-25062	LX-PEN-25072	LX-PEN-25080
	18W	25W	30W
	1440Lm	2000Lm	2400Lm
	220-240VAC 50/60Hz		
	Luminus COB		
	2700K/3000K/4000K		
Ra	≥90		
	15°/23°/38°/45°/60°		
	Remote electronic power supply		
	PHASE/0/1-10V /DALI as options		
			
IP20			










DOBSON

OPTIONAL COLOR






	LX-DL-23075A	LX-DL-23095AM	LX-DL-23095AL
	20W	25W	30W
	1600Lm	2000Lm	2400Lm
	220-240VAC 50/60Hz		
	Luminus COB		
	2700K/3000K/4000K		
Ra	≥90		
	15°/23°/38°/45°/60°		
	Remote electronic power supply		
	PHASE/0/1-10V /DALI as options		
			
IP20			



DOBSON

OPTIONAL COLOR



	LX-DL-24062A	LX-DL-24072A	LX-DL-24080A
	18W	25W	30W
	1440Lm	2000Lm	2400Lm
	220-240VAC 50/60Hz		
	Luminus COB		
	2700K/3000K/4000K		
Ra	≥90		
	15°/23°/38°/45°/60°		
	Remote electronic power supply		
	PHASE/0/1-10V /DALI as options		
			
IP20			

TRACK LIGHT





DOBSON-T



	LX-DL-16065A	LX-DL-16075A	LX-DL-16085A
⚡	20W	30W	40W
💡	1600Lm	2400Lm	3200Lm
🔌	220-240VAC 50/60Hz		
🌞	BRIDGELUX COB		
🌈	2700K/3000K/4000K		
Ra	≥90		
📏	15°/24°/36°		
🔌	Remote electronic power supply		
🕒	PHASE/0/1-10V /DALI as options		
📏			
IP20			





DOBSON-T



	LX-DL-16065C	LX-DL-16075C	LX-DL-16085C
⚡	20W	30W	40W
💡	1600Lm	2400Lm	3200Lm
🔌	220-240VAC 50/60Hz		
🌞	BRIDGELUX COB		
🌈	2700K/3000K/4000K		
Ra	≥90		
🔊	15°/24°/36°		
🔌	Remote electronic power supply		
📷	PHASE/0/1-10V /DALI as options		
📏			
🛡️	IP20		



DOBSON-T



	LX-DL-16065B	LX-DL-16075B	LX-DL-16085B
⚡	20W	30W	40W
💡	1600Lm	2400Lm	3200Lm
🔌	220-240VAC 50/60Hz		
🌞	BRIDGELUX COB		
🌈	2700K/3000K/4000K		
Ra	≥90		
🔊	15°/24°/36°		
🔌	Remote electronic power supply		
📷	PHASE/0/1-10V /DALI as options		
📏			
🛡️	IP20		





DOBSON-TG



	LX-DL-21045	LX-DL-21055	LX-DL-21065	LX-DL-21075
⚡	10W	20W	30W	40W
💡	800Lm	1600Lm	2400Lm	3200Lm
🔌	220-240VAC 50/60Hz			
☀️	BRIDGELUX COB			
🌈	2700K/3000K/4000K			
Ra	≥90			
📐	15°/25°/36°			
🔧	Remote electronic power supply			
🔄	PHASE/0/1-10V /DALI as options			
📏				
IP20				








DOBSON-TS

OPTIONAL COLOR



	LX-DL-20062A	LX-DL-20072A	LX-DL-20080A
⚡	18W	25W	32W
💡	1440Lm	2000Lm	2560Lm
🔌	220-240VAC 50/60Hz		
🌞	BRIDGELUX COB		
🌈	2700K/3000K/4000K		
Ra	≥90		
📏	20°/60°		
🔌	Remote electronic power supply		
🕒	PHASE/0/1-10V /DALI as options		
📏			
IP20			








DOBSON-TS

OPTIONAL COLOR







	LX-DL-20062B	LX-DL-20072B	LX-DL-20080B
⚡	18W	25W	32W
💡	1440Lm	2000Lm	2560Lm
🔌	220-240VAC 50/60Hz		
🌞	BRIDGELUX COB		
🌈	2700K/3000K/4000K		
Ra	≥90		
📏	Adjustable 20°/60°		
🔌	Remote electronic power supply		
🕒	PHASE/0/1-10V /DALI as options		
📏			
IP20			



RADAR T



TRACK OPTIONS:
W3W4W5



	LX-DL-3351	LX-DL-3353	LX-DL-3352	LX-DL-3354
⚡	7W			
💡	125-143lm		446-469lm	
🔌	220-240VAC 50/60Hz			
🌞	CITIZEN			
🌈	2700K/3000K/4000K/5000K			
Ra	≥90			
📐	12°~36°		15°/24°/33°	
🔌	Remote electronic power supply			
🕒	PHASE			
📏				
IP20				




7W
12°~36°

INNOVATIVE






	LX-DL-3501				LX-DL-3702		
⚡	8W	10W	12W	15W	15W	20W	25W
💡	2700K:630-661lm 3000K:632-664lm	2700K:705-734lm 3000K:740-779lm	2700K:802-825lm 3000K:821-864lm	2700K:895-922lm 3000K:920-971lm	2700K:945-1064lm 3000K:1072-1122lm	2700K:1303-1468lm 3000K:1500-1570lm	2700K:1622-1760lm 3000K:1716-1803lm
🔌	220-240VAC 50/60Hz						
🌞	CITIZEN						
🌈	2700K/3000K/4000K/5000K						
Ra	>90						
📐	15°/24°/38°						
🔌	Remote electronic power supply						
🕒	PHASE/1-10V /DALI						
📏							
IP20							

M-LINE 60 SERIES

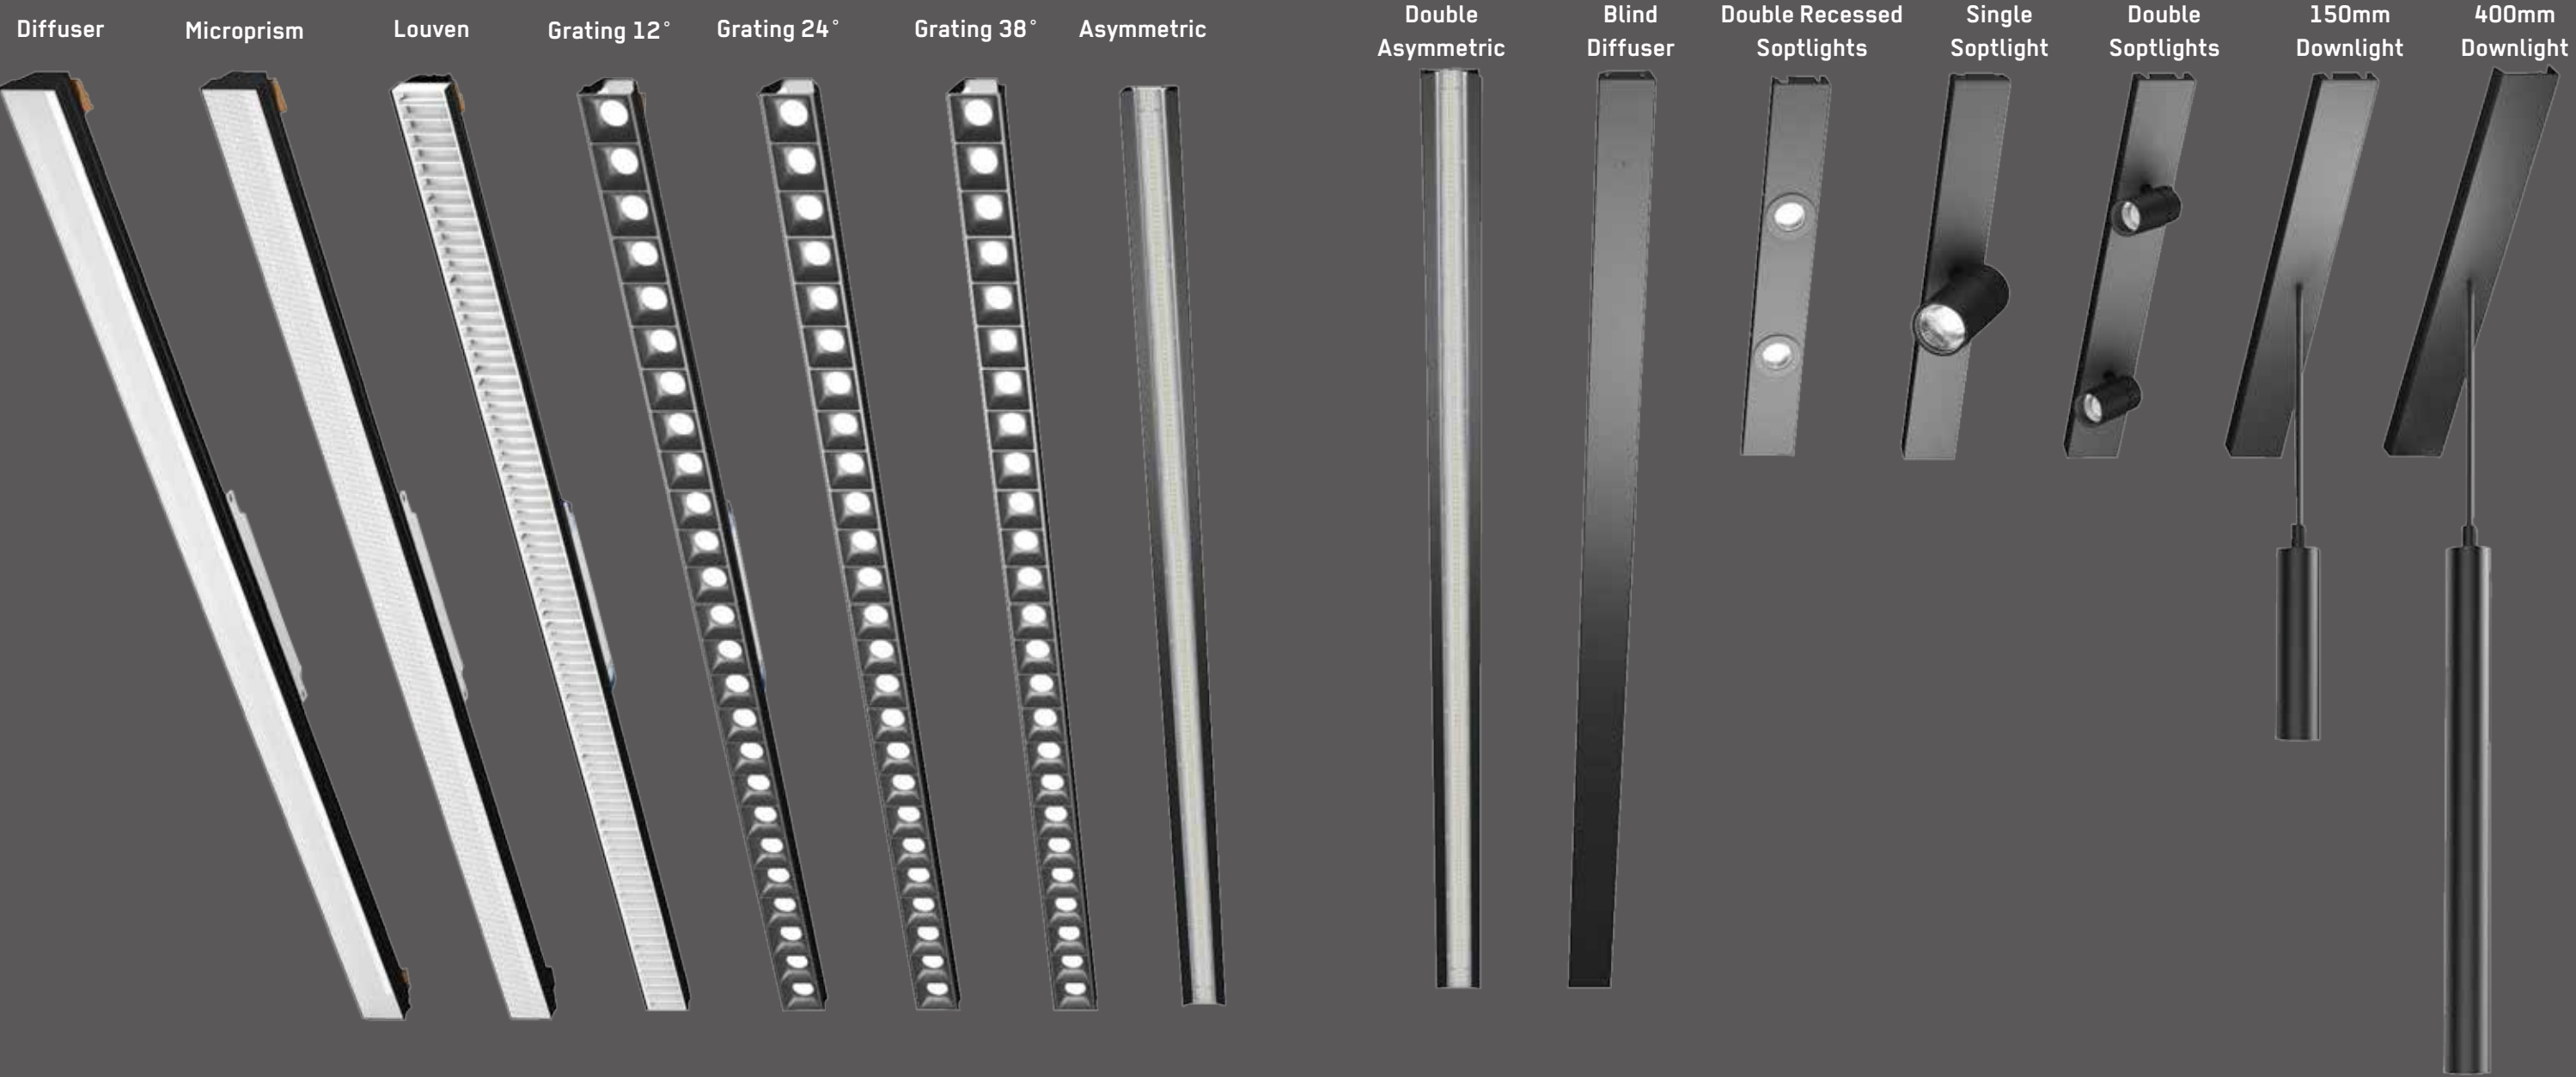








	LX-DL-M60FD			LX-DL-M60FP		
	19W	37W	68W	19W	37W	68W
	2000lm	3880lm	7150lm	1700lm	3300lm	6120lm
	AC200-240V 50/60Hz					
	2700K/3000K/4000K/6500K					
Ra	>80 (90 optional)					
	110° Diffuser			90° Microprism		
	0-10V Dimming					
	 LX-DL-M60FD-19W/ LX-DL-M60FD-19W					 72.2mm 53.7mm
	 LX-DL-M60FD-37W/ LX-DL-M60FP-37W					
	 LX-DL-M60FD-68W/ LX-DL-M60FP-68W					
IP20						





	LX-DL-M60GX	
	11W	15W
	1050lm	1400lm
	AC200-240V 50/60Hz	
	2700K/3000K/4000K/6500K	
Ra	>80 (90 optional)	
	12°/24°/38° Grating	
	0-10V Dimming	
	 245mm 284mm 72.2mm 53.7mm	 245mm 568mm 72.2mm 53.7mm
IP20		

Installation

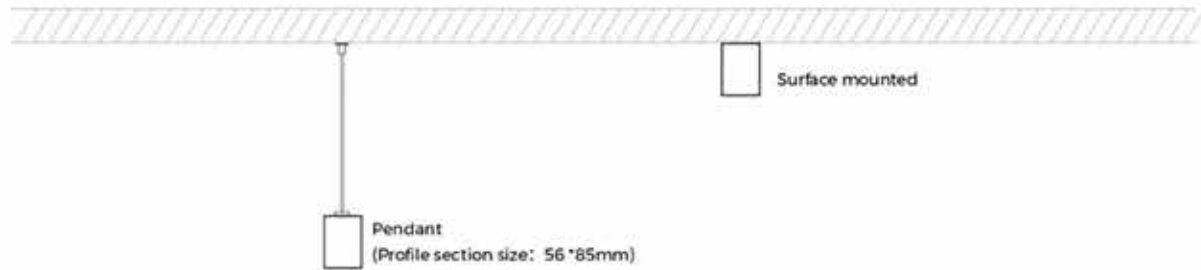

Module



Optics



Finishes



CCT



Dimming



0-10V Dimming / Bluetooth Dimming

Certifications









	LX-DL-M60BD	
	19W	37W
	1350lm	2600lm
	AC200-240V 50/60Hz	
	2700K/3000K/4000K/6500K	
	>80 (90 optional)	
	70° Louven	
	0-10V Dimming	
		
		



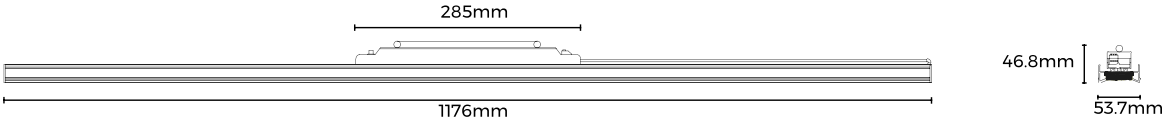

	LX-DL-M60LA	LX-DL-M60LS
	27W	
	3100lm	3500lm
	AC200-240V 50/60Hz	
	2700K/3000K/4000K/6500K	
	>80 (90 optional)	
	90° X65° (Asymmetric : 18°) lens	115° X100° (Asymmetric : 40°) lens
	0-10V Dimming	
		
		


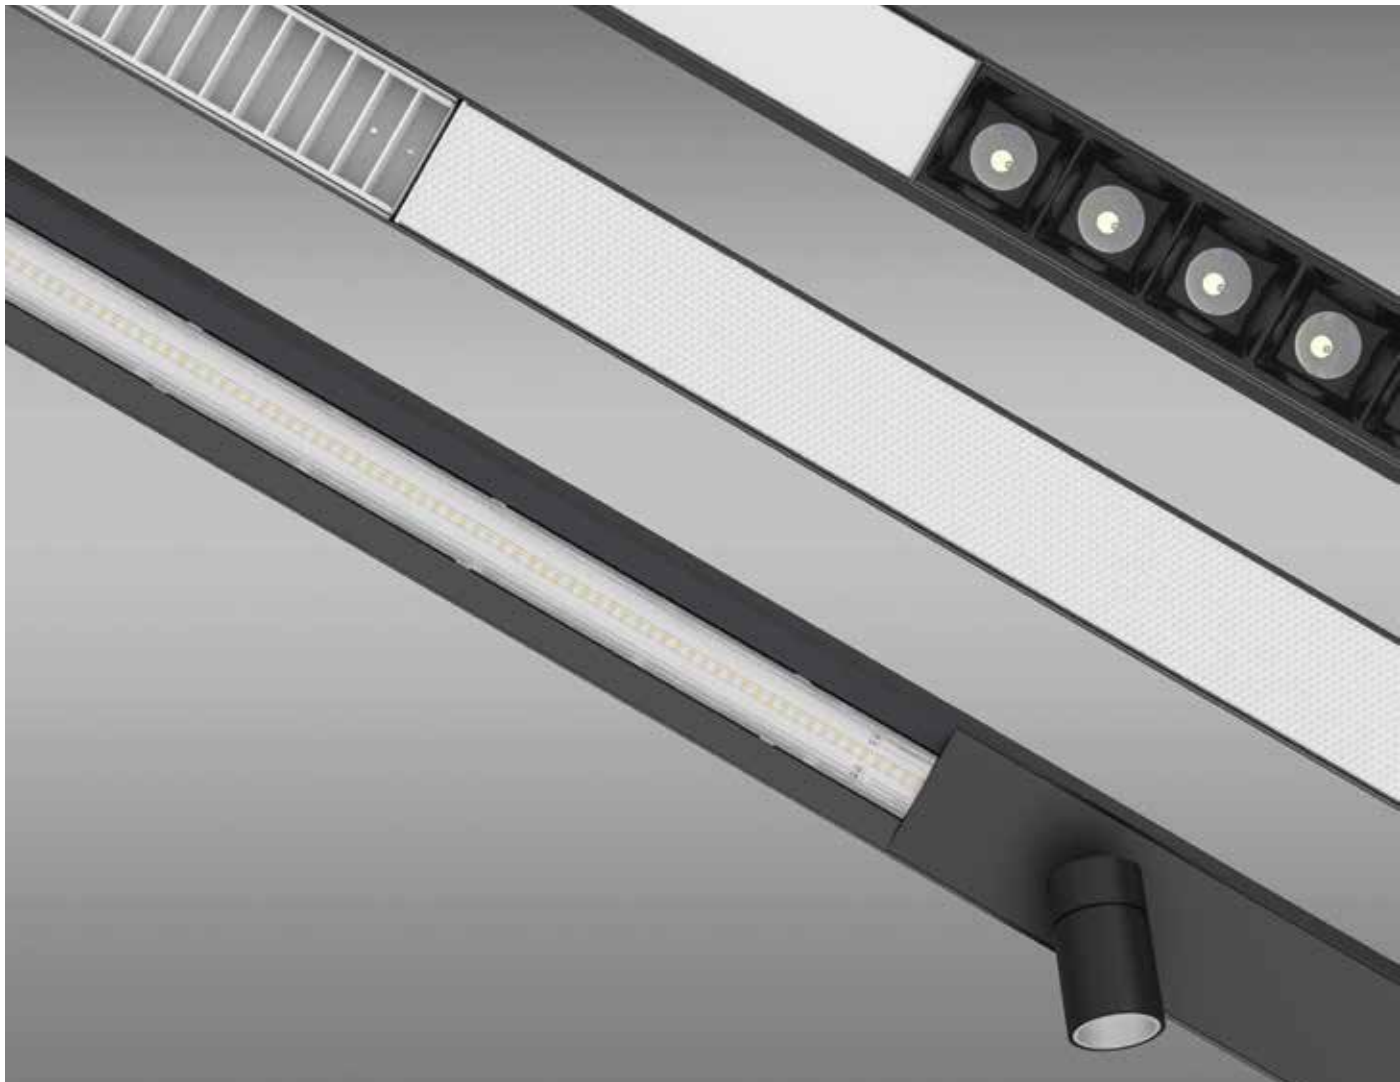







	LX-DL-M60SF-35RB	
	6W	
	400lm	
	AC200-240V 50/60Hz	
	3000K/6000K	
Ra	90°	
	24° lens	
	0-10V Dimming	
	 45.9mm 288mm 53.7mm	 66.9mm 288mm 53.7mm
IP20		



	LX-DL-M60SE-55WA	LX-DL-M60SF-35WB
	12W	12W
	1050lm	1100lm
	AC200-240V 50/60Hz	
	3000K/4000K	
Ra	90°	
	20° lens	24° lens
	0-10V Dimming	
	 288mm 137.6mm 53.7mm Φ 55mm 90° 355°	 288mm 109.4mm 53.7mm Φ 35mm 90° 355°
IP20		

Connection

Profile connection, convenient and efficient

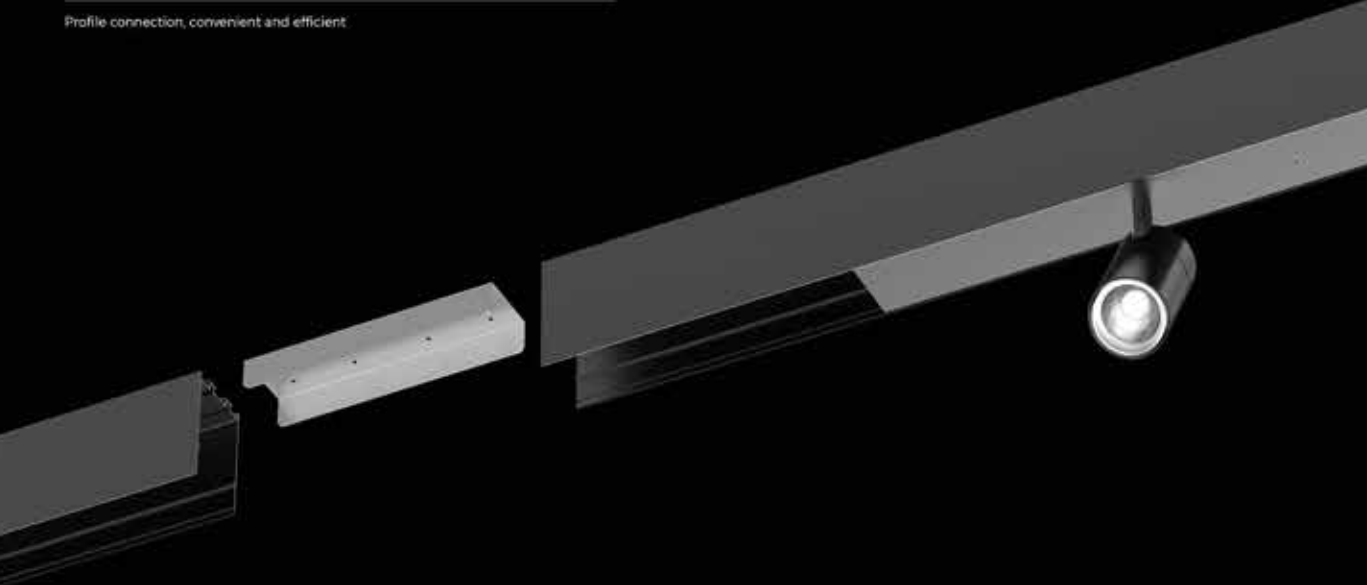



Corner

Five standard corners, can achieve a variety of three-dimensional space modeling






MAGNETIC TRACK LIGHT



MAGNETO SERIES

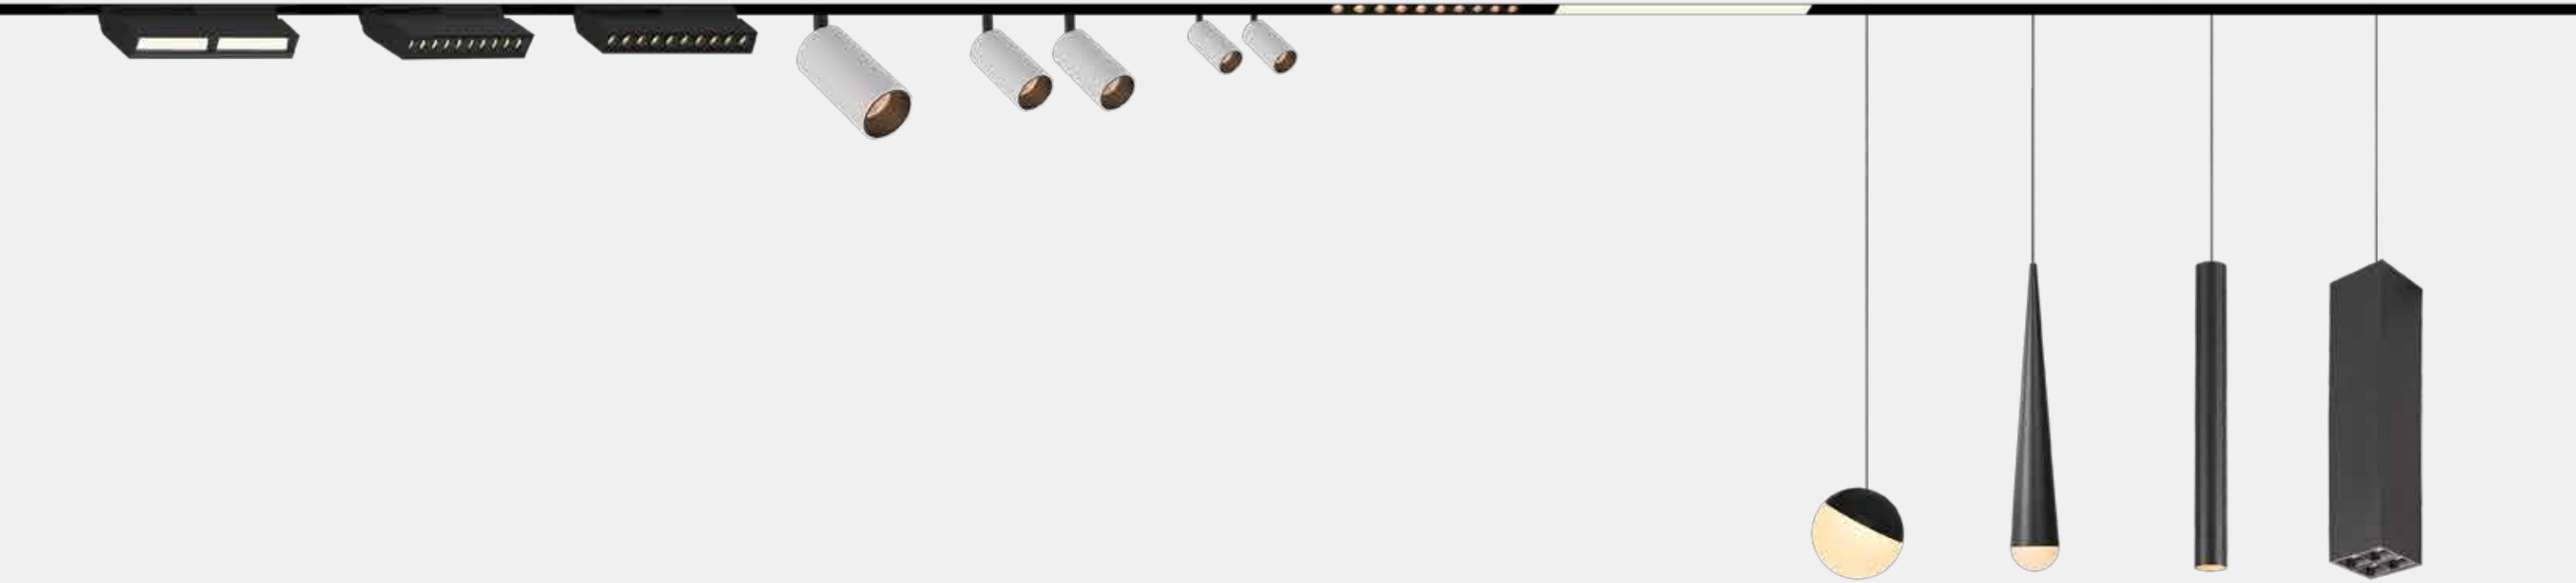

LX-LU-DO



Track Construction

LU-DO 1m	LU-DO Xm	LU-DO P1	LU-DO A1	LU-DO L1	LU-DO L2
	CUSTOMISED	▴ SB / SW	STAINLESS STEEL	REQUIREMENTS TRACK CONNECTION CORNER H90°	REQUIREMENTS TRACK CONNECTION CORNER IN90°
LU-DO 2m	MAX.L/ 3m				
LU-DO 3m	▴ SB / SW				
▴ SB / SW	48VDC (2 WIRES) 2 DIM WIRES IP20				
48VDC (2 WIRES) 2 DIM WIRES IP20					
		LU-DO P2			LU-DO L3
		▴ SB / SW			REQUIREMENTS TRACK CONNECTION CORNER OUT90°

Connector/Supply

LU-DO A2	LU-DO A3	LU-DO A4	LU-DO A5	LU-DO A6	LU-DO A7
LIFE END	LIFE END DALI	CONNECTOR 180°	CONNECTOR 90°	CONNECTOR FELX	CONNECTOR FELX DALI
48V-DC MAX. 200W/ SUPPLY / MAX.30m IP20	48V-DC MAX. 200W/ SUPPLY / MAX.30m IP20	48V-DC MAX. 200W/ SUPPLY / MAX.30m IP20	48V-DC MAX. 200W/ SUPPLY / MAX.30m IP20	48V-DC MAX. 200W/ SUPPLY / MAX.30m IP20	48V-DC MAX. 200W/ SUPPLY / MAX.30m IP20

LX-LU-IN



Track Construction

LU-IN 1m	LU-IN Xm	LU-IN P1	LU-IN A1	LU-IN L4	LU-IN L5
LU-IN 2m	CUSTOMISED	▴ SB / SW	STAINLESS STEEL	REQUIREMENTS TRACK CONNECTION CORNER H90°	REQUIREMENTS TRACK CONNECTION CORNER IN90°
LU-IN 3m	MAX.L/ 3m				
▴ SB / SW	▴ SB / SW		REQUIREMENTS TRACK CONNECTION CORNER 180°		
48VDC (2 WIRES) 2 DIM WIRES IP20	48VDC (2 WIRES) 2 DIM WIRES IP20				
		LU-IN P2			LU-IN L5
		▴ SB / SW			REQUIREMENTS TRACK CONNECTION CORNER OUT90°

Connector/Supply

LU-IN A2	LU-IN A3	LU-IN A4	LU-IN A5	LU-IN A6	LU-IN A7
LIFE END	LIFE END DALI	CONNECTOR 180°	CONNECTOR 90°	CONNECTOR FELX	CONNECTOR FELX DALI
48V-DC MAX. 200W/ SUPPLY / MAX.30m IP20	48V-DC MAX. 200W/ SUPPLY / MAX.30m IP20	48V-DC MAX. 200W/ SUPPLY / MAX.30m IP20	48V-DC MAX. 200W/ SUPPLY / MAX.30m IP20	48V-DC MAX. 200W/ SUPPLY / MAX.30m IP20	48V-DC MAX. 200W/ SUPPLY / MAX.30m IP20

LX-LU-ON



Track Construction

LU-ON 1m	LU-ON Xm	LU-ON1	LU-A9	LU-ON2
	CUSTOMISED	△ SB / SW	REQUIREMENTS TRACK CONNECTION CORNER 90°	△ SB / SW
LU-ON 2m	MAX.L/ 3m			
LU-ON 3m	△ SB / SW			
△ SB / SW	48VDC (2 WIRES) 2 DIM WIRES IP20			
48VDC (2 WIRES) 2 DIM WIRES IP20				

LX-LU-P



Track Construction

LU-P 1m	LU-P Xm	LU-P1	LU-L7	LU-P2
LU-P 1.5m	CUSTOMISED	△ SB / SW	REQUIREMENTS TRACK CONNECTION CORNER 90°	△ SB / SW
LU-P 3m	MAX.L/ 3m			
△ SB / SW	△ SB / SW			
48VDC (2 WIRES) 2 DIM WIRES IP20	48VDC (2 WIRES) 2 DIM WIRES IP20			





Connector/Supply







LU-A2	LU-A3	LU-A4	LU-A9	LU-A6	LU-A7
LIFE END	LIFE END DALI	CONNECTOR 180°	CONNECTOR 90°	CONNECTOR FELX	CONNECTOR FELX DALI
48V-DC MAX. 200W/ SUPPLY / MAX.30m IP20	48V-DC MAX. 200W/ SUPPLY / MAX.30m IP20	48V-DC MAX. 200W/ SUPPLY / MAX.30m IP20	48V-DC MAX. 200W/ SUPPLY / MAX.30m IP20	48V-DC MAX. 200W/ SUPPLY / MAX.30m IP20	48V-DC MAX. 200W/ SUPPLY / MAX.30m IP20




Connector/Supply

LU-A2	LU-A3	LU-A4	LU-A8	LU-A6	LU-A7
LIFE END	LIFE END DALI	CONNECTOR 180°	CONNECTOR 90°	CONNECTOR FELX	CONNECTOR FELX DALI
48V-DC MAX. 200W/ SUPPLY / MAX.30m IP20	48V-DC MAX. 200W/ SUPPLY / MAX.30m IP20	48V-DC MAX. 200W/ SUPPLY / MAX.30m IP20	48V-DC MAX. 200W/ SUPPLY / MAX.30m IP20	48V-DC MAX. 200W/ SUPPLY / MAX.30m IP20	48V-DC MAX. 200W/ SUPPLY / MAX.30m IP20







	RUSS B	RUSS S	RUSS C	RUSS M	SENTO
					
	LX-DL-2015	LX-DL-2016	LX-DL-2014	LX-DL-2017	LX-DL-2019
	7.5W		10W		8W
	261lm		481lm		384lm
	DC48V 50/60Hz				
	3000K/4000K				
Ra	>80				
	12°/24°/40°		15°/30°/45°		15°
	Not dimming / DALI				
					
IP20					

	SENTO	LINE	ROIN	SQON		
						
	LX-DL-2030	LX-DL-2011B	LX-DL-2025B	LX-DL-2026	LX-DL-2029	LX-DL-2012
⚡	8W	10W	20W	12W	24W	10W
💡	384lm	900 lm	1800 lm	741 lm	1441 lm	696 lm
🔌	DC48V 50/60Hz					
🌈	3000K/4000K					
Ra	>80					
📐		120°	15°/24°/36°		15°/30°/45°	
🕒	Not dimming / DALI					
📏						
IP20						

BRET S		BRET L		BRET X	
					
					
LX-DL-2027		LX-DL-2028		LX-DL-2013	
3W		2*3W		2*8W	
DC48V 50/60Hz		8W		14W	
123lm		2*123lm		2*366lm	
3000K/4000K		366lm		642lm	
Ra		>80		1547lm	
12°/24°/40°		15°/22°/30°/50°		Not dimming / DALI	
					
IP20		Ø30		Ø52	



	SQAD R	SQAD S	ROAD	FLOD
				
				
	LX-DL-2018	LX-DL-2022	LX-DL-2023	LX-DL-2024
	10W	10W	10W	12W
	DC48V 50/60Hz			
	534lm	696lm	610lm	410lm
	3000K/4000K			
Ra	>80			
	15°/30°/45°			Asymmetric
	Not dimming / DALI			
				
IP20				

GALAXY SERIES




GALAXY is a full family of extruded aluminium profile system as a recessed, surface mounted, and suspended versions, with toolfree installation of various inserts based on the principle of magnetic attraction. Various optical inserts are including spot light, pendant light, linear spot light, linear opal light, wall washer asymmetric light. Different inserts are held in place

by magnetic force along the entire track. When the interior environment is changed, this system allows user to relocate the different inserts flexibly, or slide them to any position by one hand movement to highlight the objects. GALAXY trimless profile system with a seamless design offers consistent aesthetics and complete solutions for residen-


tial, hospitality, retail and commercial applications. The profiles can run across walls and ceilings, creating three-dimensional continuous lines of light emphasizing the geometry of the room and maintaining a minimalist, elegant look. Surface-mounted and pendant versions can be applied with the same flexible system.




Mounting:

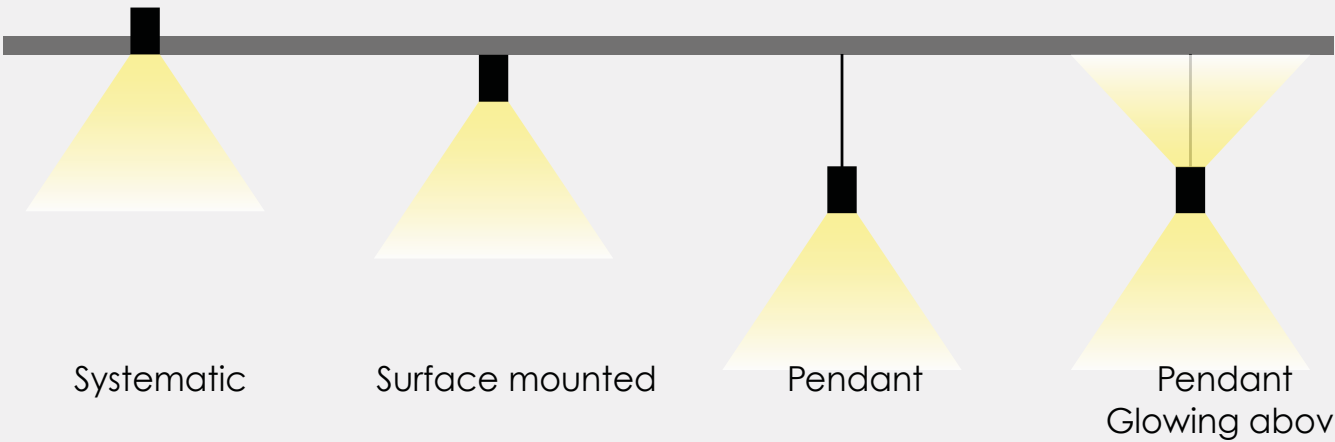


Systematic

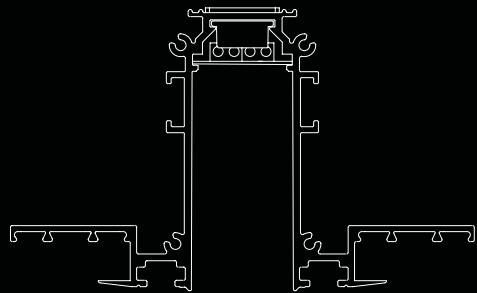


Systematic

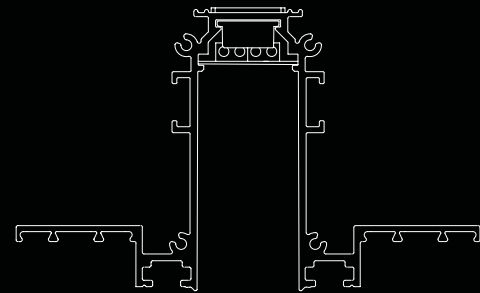

DC48V



Surface mounted




Pendant


Optical inserts



Linear opal light

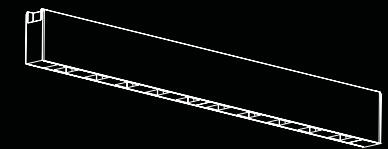


Linear spot light




Spot light




Wall washer



Pendant light



Decorative light

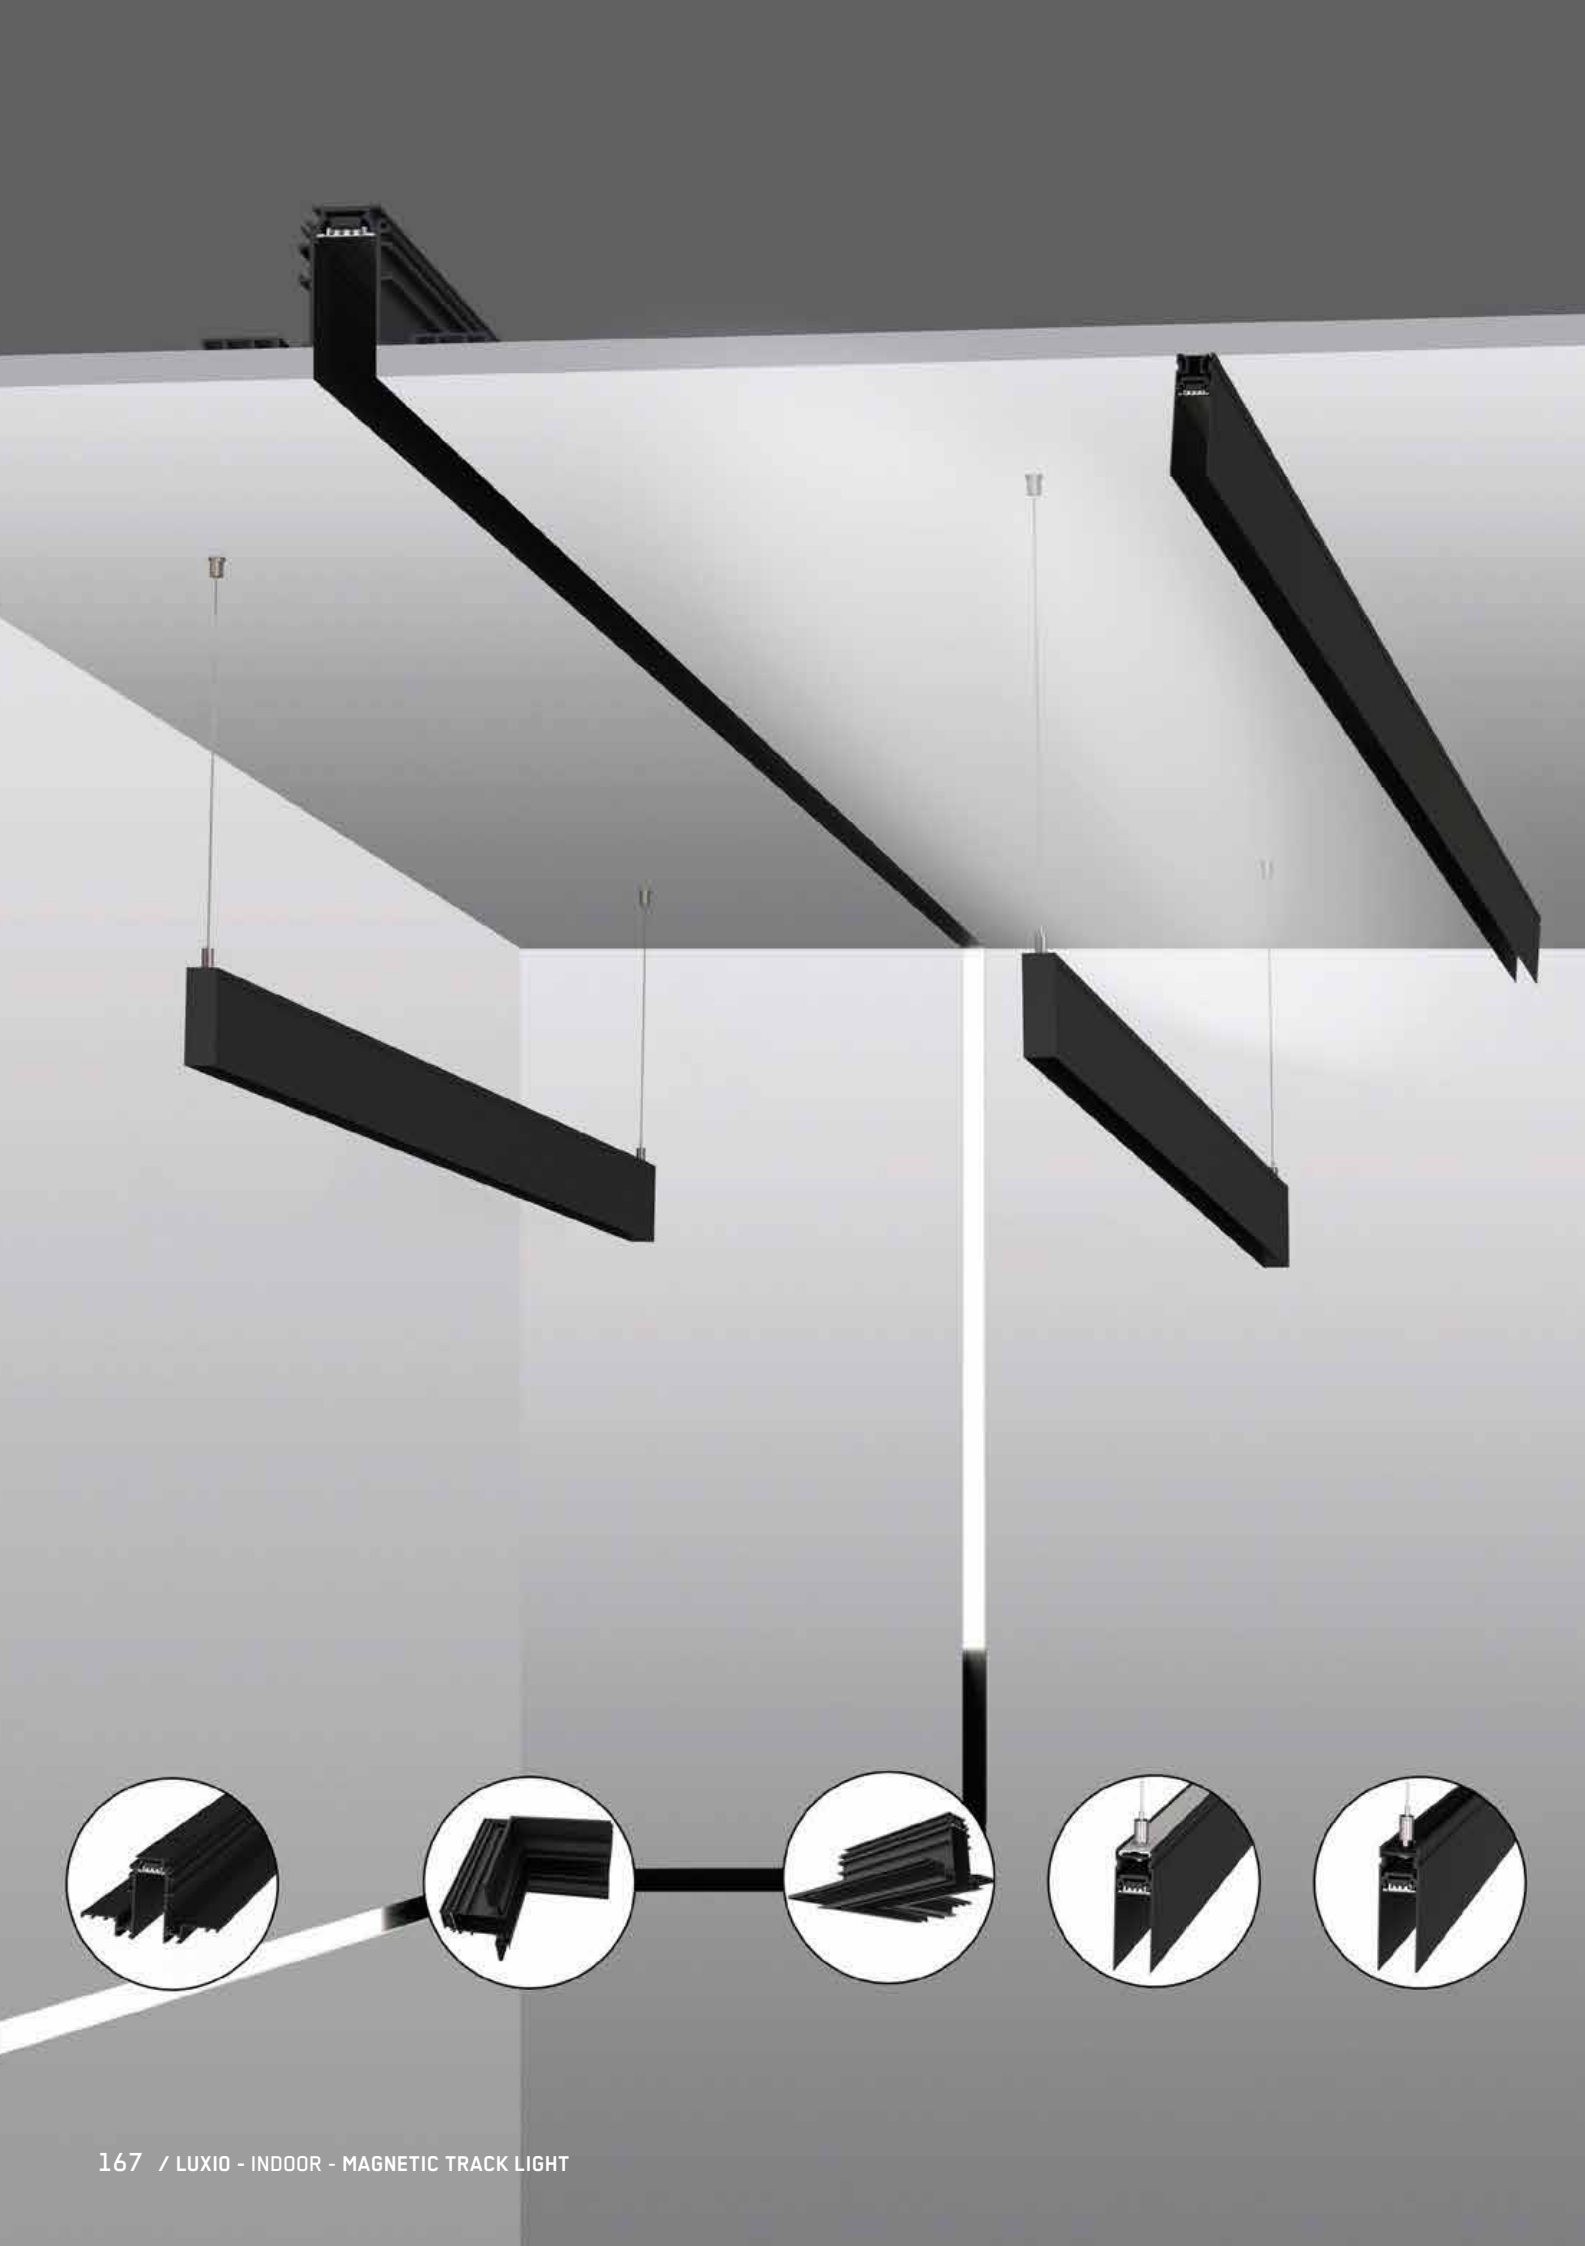

Recessed Version


LX-GR25 & LX-GR25C



Track Components

Model No.	Dimension
LX-GR25-500(Power section)	L500*W116*H71mm
LX-GR25-1000(Power section)	L1000*W116*H71mm
LX-GR25-500(Splicing section)	L500*W116*H71mm
LX-GR25-1000(Splicing section)	L1000*W116*H71mm
LX-GR25C-500(Power section)	L500*W116*H71mm
LX-GR25C-1000(Power section)	L1000*W116*H71mm
LX-GR25C-500(Splicing section)	L500*W116*H71mm
LX-GR25C-1000(Splicing section)	L1000*W116*H71mm

Technical drawing

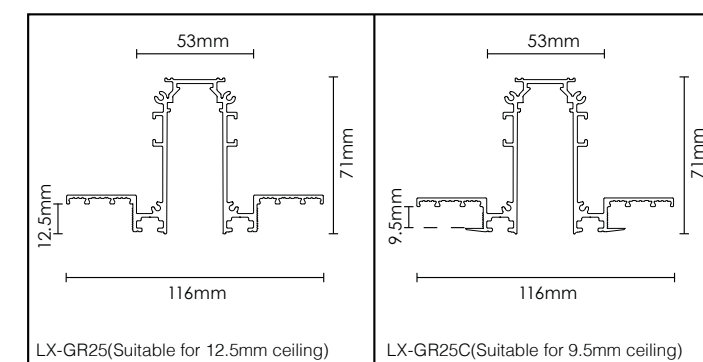

Accessories

Model No.:LX-GR251 Horizontal Corner: 90° corner between the same plane. (Suitable for 12.5mm ceiling)	Model No.:LX-GR252 Vertical Corner: 90° between different planes, such as walls to ceilings.(Suitable for 12.5mm ceiling)	Model No.:LX-GR253 External Corner: 90° corner between different planes, such as the corner of the surface of a square column.(Suitable for 12.5mm ceiling)	Model No.:LX-GR25-01 M-Track Recessed Profile Feed-In Kit.
Model No.:LX-GR251C Horizontal Corner: 90° corner between the same plane. (Suitable for 9.5mm ceiling)	Model No.:LX-GR252C Vertical Corner: 90° between different planes, such as walls to ceilings.(Suitable for 9.5mm ceiling)	Model No.:LX-GR253C External Corner: 90° corner between different planes, such as the corner of the surface of a square column.(Suitable for 9.5mm ceiling)	Model No.:LX-GR25-02 M-Track Recessed Profile End Cap.
			Model No.:LX-GR25-04 Assembly tool-Allen wrench.


Suface mounted Version

LX-GS25



Pendant Version


LX-GP25

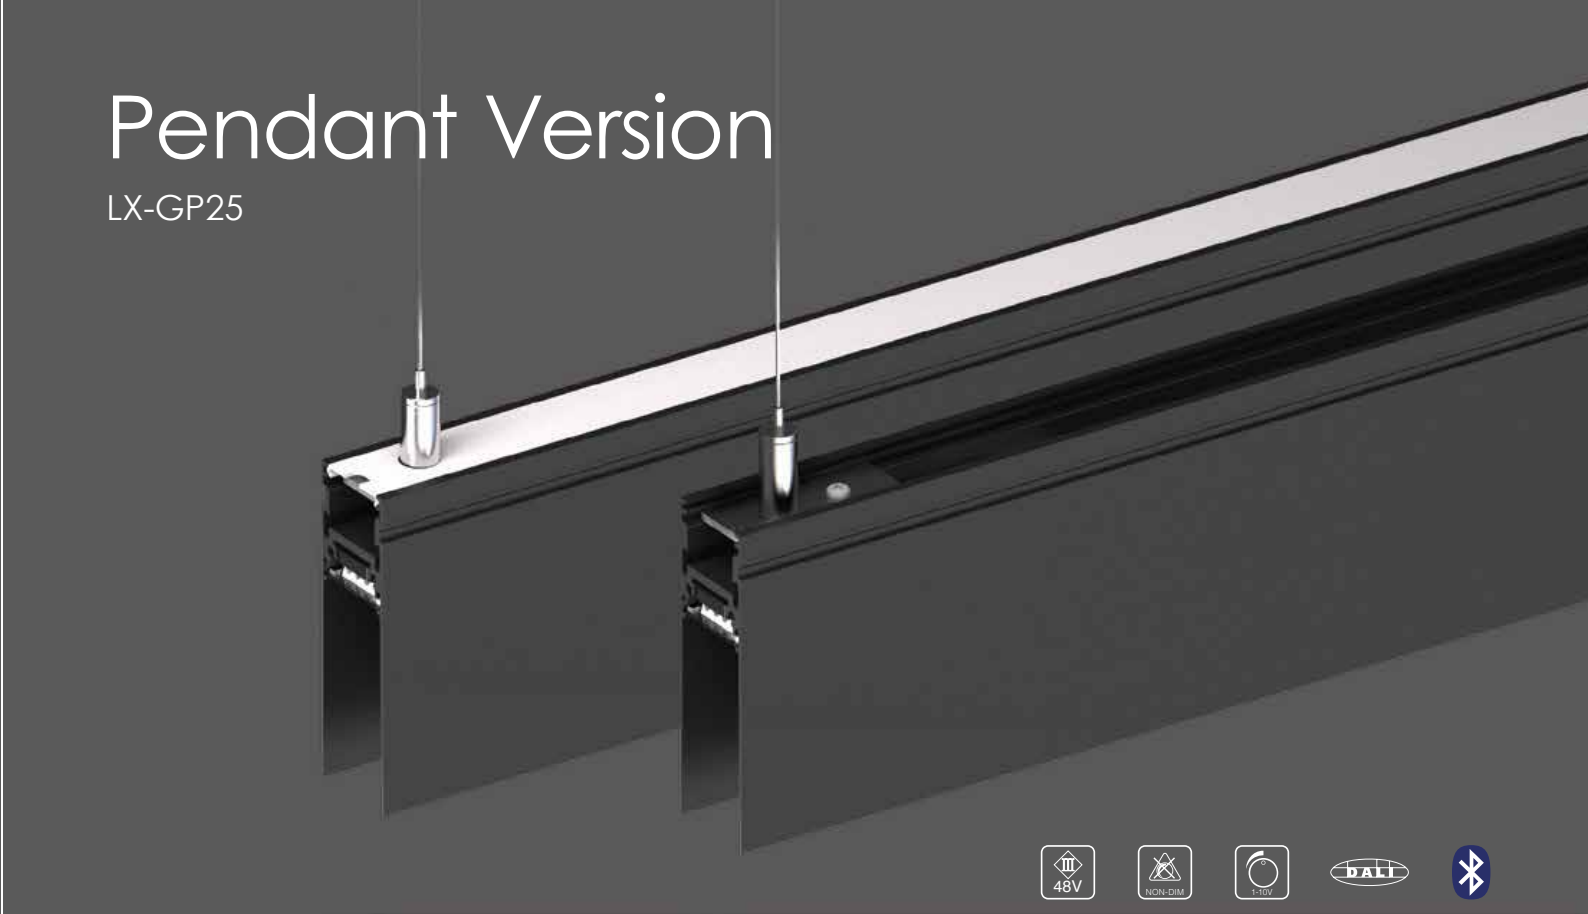

Track Components

Model No.	Dimension
LX-GS25-1000(Power section)	L1000*W28*H88mm
LX-GS25-2000(Power section)	L2000*W28*H88mm
LX-GS25-500(Splicing section)	L500*W28*H88mm
LX-GS25-1000(Splicing section)	L1000*W28*H88mm
LX-GS25-2000(Splicing section)	L2000*W28*H88mm

Technical drawing

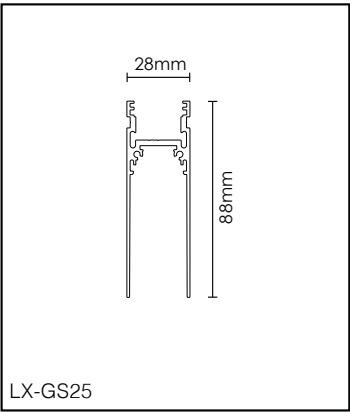


LX-GS25

Track Components




Model No.	Dimension
LX-GP25-500(Power section)	L500*W28*H88mm
LX-GP25-1000(Power section)	L1000*W28*H88mm
LX-GP25-2000(Power section)	L2000*W28*H88mm
LX-GP25-2500(Power section)	L2500*W28*H88mm
LX-GP25-500(Splicing section)	L500*W28*H88mm
LX-GP25-1000(Splicing section)	L1000*W28*H88mm
LX-GP25-2000(Splicing section)	L2000*W28*H88mm
LX-GP25-2500(Splicing section)	L2500*W28*H88mm
LX-GP25-2000Glowing above(Power section)	L2000*W28*H88mm
LX-GP25-2500Glowing above(Power section)	L2500*W28*H88mm
LX-GP25-2000Glowing above(Splicing section)	L2000*W28*H88mm
LX-GP25-2500Glowing above(Splicing section)	L2500*W28*H88mm

Technical drawing







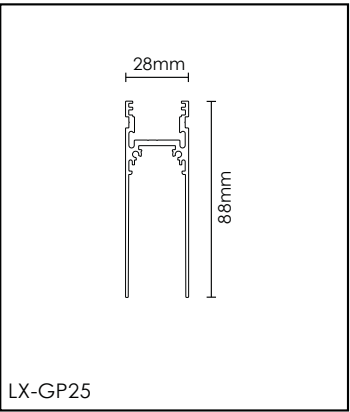





LX-GP25

Accessories

 Model No.:LX-GP25-01 M-Track end cap.	 Model No.:LX-GS251 Horizontal Corner: 90° corner between the same plane.
 Model No.:LX-GP25-06 M-Track contact pin.	


Accessories

 Model No.:LX-GP25-01 M-Track end cap.	 Model No.:LX-GP25-02 M-Track connection piece.	 Model No.:LX-GP25-03 Suspension connection piece B.	 Model No.:LX-GS251 Horizontal Corner: 90° corner between the same plane.
 Model No.:LX-GP25-04 Suspension cable only.	 Model No.:LX-GP25-05 Suspension connection piece A.	 Model No.:LX-GP25-06 M-Track contact pin.	








	LINEAR OPAL LIGHT	LINEAR DOT LIGHT	WALL WASHER LIGHT
			
	LX-DL-G252	LX-DL-G251	LX-DL-G253
⚡	15W	10*1.2W	15W
💡	2700K : 325lm / 3000K : 350lm	2700K : 420-800lm / 3000K : 429-812lm	2700K : 590lm / 3000K : 598lm
🔌	DC48V 50/60Hz		
🌈	2700K/3000K/5700K		
Ra	>80 / >90		
📐	100°	15°/24°/33°/19°x48°	45°x140°
📶	DALI / Bluetooth		
📏			
IP20			

LX-DL-G253

Installation specifications




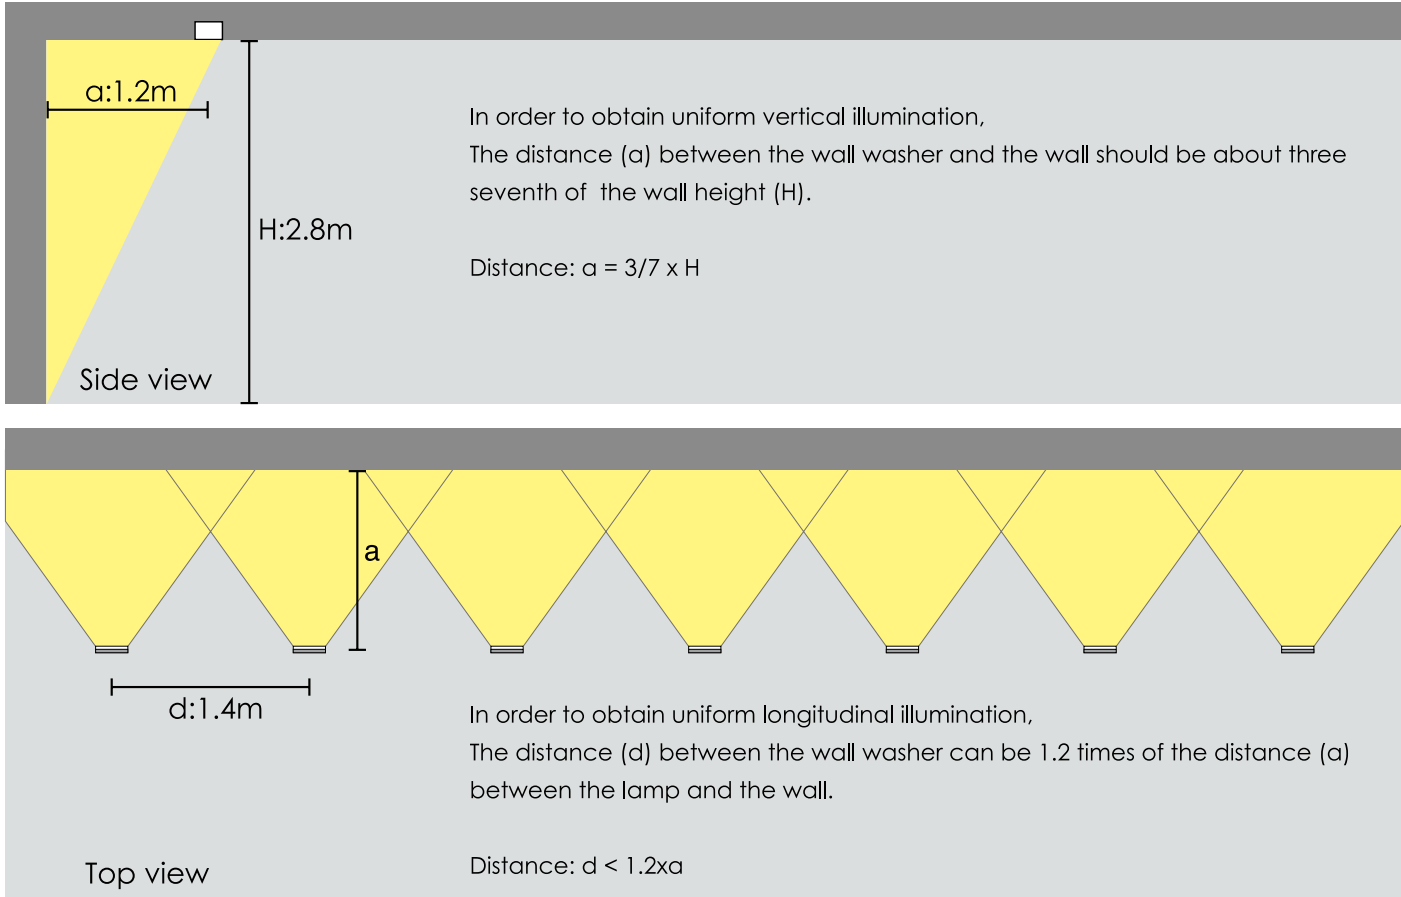


MAGNETIC SPOTLIGHT R/S

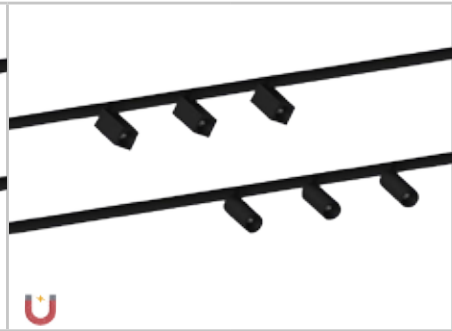					
LX-DL-G201		LX-DL-G203		LX-DL-G202	
LX-DL-G203		LX-DL-G202		LX-DL-G204	
LX-DL-G202		LX-DL-G204		LX-DL-G205	
LX-DL-G205		LX-DL-G206			
1W/3W		2*1W/2*3W		3*1W/3*3W	
1W (2700K : 47-72lm / 3000K : 48-78lm) 3W (2700K : 79-124lm / 3000K : 82-134lm)		2*1W (2700K : 94-144lm / 3000K : 96-156lm) 2*3W (2700K : 158-248lm / 3000K : 164-268lm)		3*1W (2700K : 141-216lm / 3000K : 144-234lm) 3*3W (2700K : 237-372lm / 3000K : 246-402lm)	
DC48V 50/60Hz		2700K/3000K/4000K/5000K		>80 / >90	
15°/24°/33°		DALI / Bluetooth			
					
					
IP20					








MAGNETIC SPOTLIGHT

				
LX-DL-G351		LX-DL-G353		LX-DL-G501
5W		2*5W		12W
2700K : 352-378lm 3000K : 375-381lm		2700K : 695-730lm 3000K : 699-732lm		2700K : 802-825lm 3000K : 821-864lm
DC48V 50/60Hz		2700K/3000K/4000K/5000K		>80 / >90
15°/24°/33°		DALI / Bluetooth		15°/24°/38°
				
IP20				






MAGNETIC PENDANT LIGHT

MAGNETIC DECORATIVE LIGHT

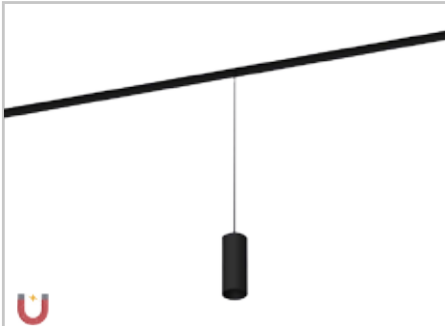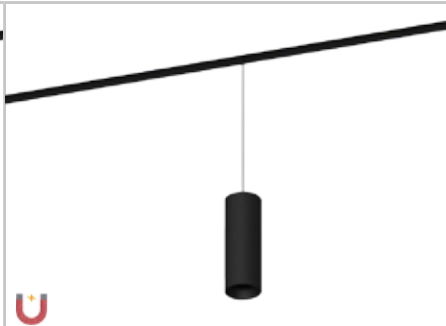			
	LX-DL-G355	LX-DL-G503	LX-DL-G751
⚡	5W	12W	7W
💡	2700K : 352-378lm / 3000K : 375-381lm	2700K : 802-825lm / 3000K : 821-864lm	2700K : 416-439lm / 3000K : 455-478lm
🔌	DC48V 50/60Hz		
🌈	2700K/3000K/4000K/5000K		
Ra	>80 / >90		
☀️	15°/25°/33°	15°/25°/38°	18°/40°
🕒	DALI / Bluetooth		
📏			
IP20			



MAGNETIC SPOTLIGHT

					
	LX-DL-G352	LX-DL-G354	LX-DL-G357	LX-DL-G359	LX-DL-G356
⚡	5W	2*5W	7W		
💡	2700K : 109-136lm 3000K : 119-141lm	2700K : 218-272lm 3000K : 238-282lm	2700K : 118-135lm / 3000K : 125-143lm		
🔌	DC48V 50/60Hz				
🌈	2700K/3000K/4000K/5000K				
Ra	>80 / >90				
☀️	12-36°				
📷	DALI / Bluetooth				
📏					
IP20					





TL-R SERIES



Neon track is available as suspended and surface-mounted versions, the track can rotate horizontally, and the system also offers the option of different linear modules include diffuser, prismatic in addition, spotlight, downlight and neon strip. These modules can be combined freely for different applications, at the same time, the track and the neon strip module can be creatively matched to achieve various rich stylings; the track is operated with 48 VDC, 30mm diameter, small and exquisite.

LX-LS-R-type track

- 48VDC power supply, Can achieve pendant cable or pendant rod
- Installation
- In two installation modes of suspension rope and suspender
- The track can be rotated vertically ± 20 degrees



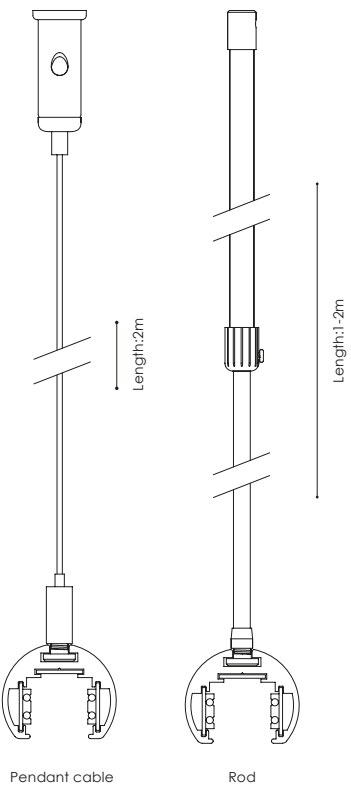



Product parameters	
Installation	Suspended / Surface mounted
Input voltage	48VDC
Maximum load	500W
Length of track	1m LX-LS-R610-B 2m LX-LS-R620-B 3m LX-LS-R630-B
Appearance	Black
Certification	CE/RoHS





Electrical connection Accessories	
Power feeder unit of track	LX-LS-R862-B 
Female end cap	LX-LS-R865-B 
End cap	LX-LS-R600A-B 
Endcap(Without Wire locker)	LX-LS-R600B-B 
End cap(Without Wire locker and Pendant cable)	LX-LS-R600C-B 
Power feeder of neon double-sided magnetic module	LX-LS-R864-B 

Interconnection Accessories	
Rotatable connector	LX-LS-R860A-B 
Turned connector (Without Wire locker)	LX-LS-R860B-B 
Turned connector (Without Wire locker and Pendant cable)	LX-LS-R860C-B 
Straight connector	LX-LS-R861A-B 
Straight connector (Without Wire locker)	LX-LS-R861B-B 
Straight connector (Without Wire locker and Pendant cable)	LX-LS-R861C-B 
I-shaped electrical connector	LX-LS-R863-B 
180°splicing bar	LX-EX-E1-S 


Installation Accessories	
Pendant cable (Track)	LX-PNA-SA2 
Pendant rod (Track)	LX-LS-R891-B 
Pendant cable (Neon)	LX-LS-R892 
Pendant rod (Neon)	LX-LS-R893-B 

			
	LX-DL-R25FD	LX-DL-R25FP	LX-DL-R25G
	10W		8W
	830lm		750lm/570lm
	48VDC 50/60Hz		
	3500/3000K/4000K		
Ra	>80 (90 optional)		
	100° diffuser		30°/60° Grating
	Non-dimming		
			
IP20			



			
	LX-DL-R25KD	LX-DL-R25LA	LX-DL-R25LS
	10W	10W	
	750lm	990lm	980lm
	48VDC 50/60Hz		
	3500/3000K/4000K		
Ra	>80 (90 optional)		
	140° Diffused block	60° X40°(Asymmetric : 20°) Asymmetric	100° X80° Double asymmetric
	Non-dimming		
			
IP20			



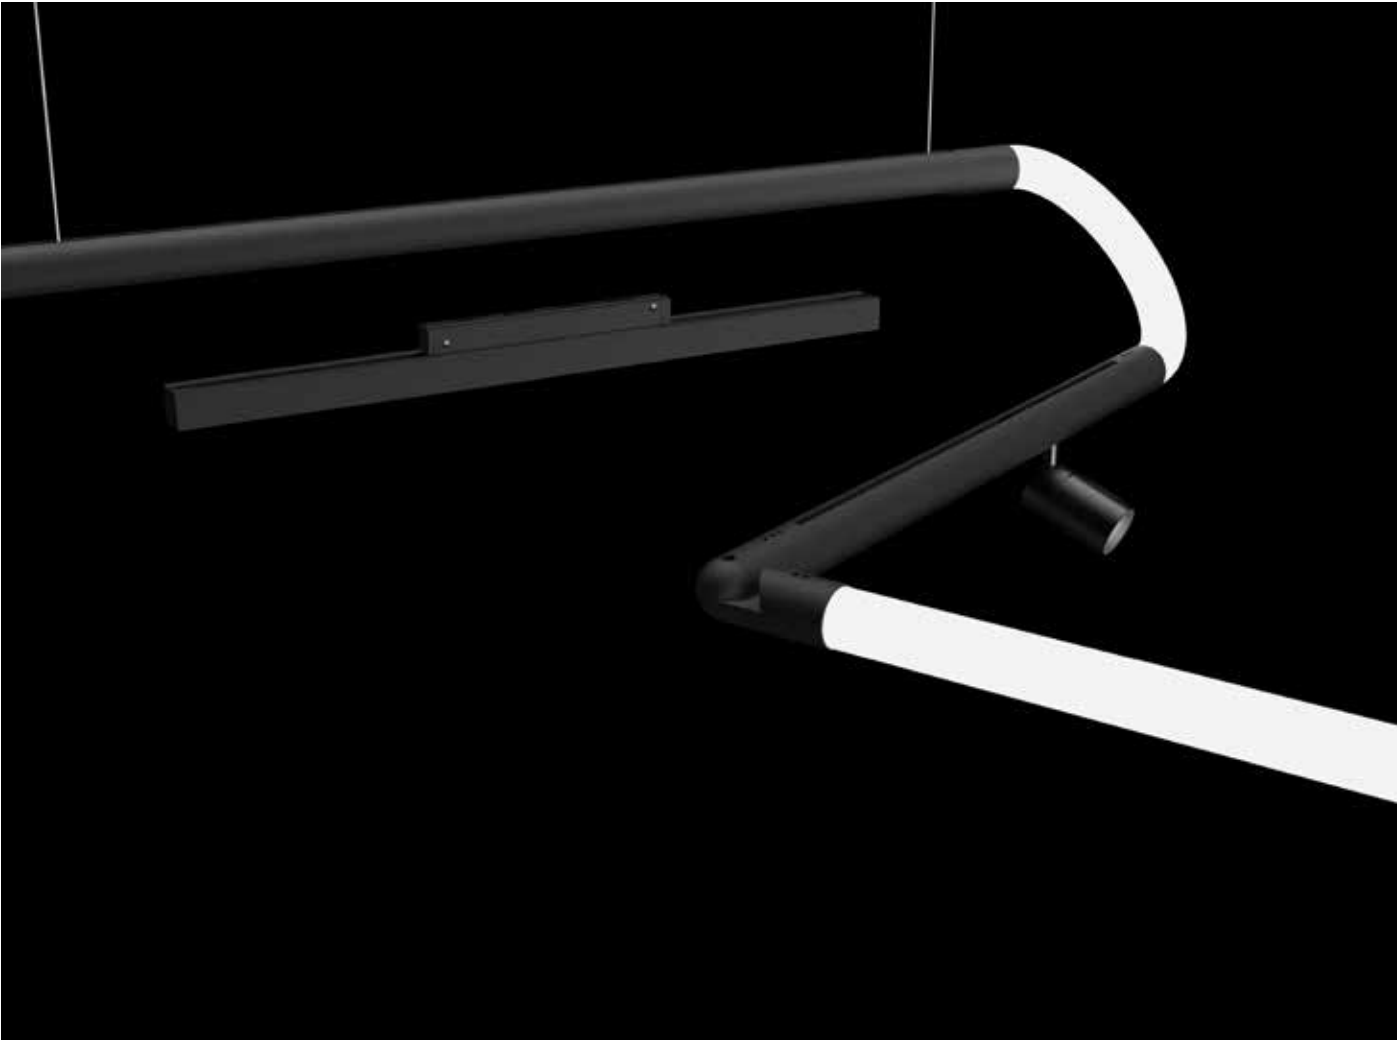


	LX-DL-RNR30NK		LX-DL-RNR30MK	
	14W	35W	70W	
	960lm	2380lm	4770lm	
	48VDC 50/60Hz			
	3500/3000K/4000K			
	>90			
	360°			
	Non-dimming			
IP20				



	LX-DL-RNR30NJ		LX-DL-RNR30MJ	
	14W	35W	7W	
	960lm	2340lm	460lm	
	48VDC 50/60Hz			
	3500/3000K/4000K			
	>90			
	360°			
	Non-dimming			
IP20	LX-DL-RNR30NJ-35W			

PROFIL LIGHT



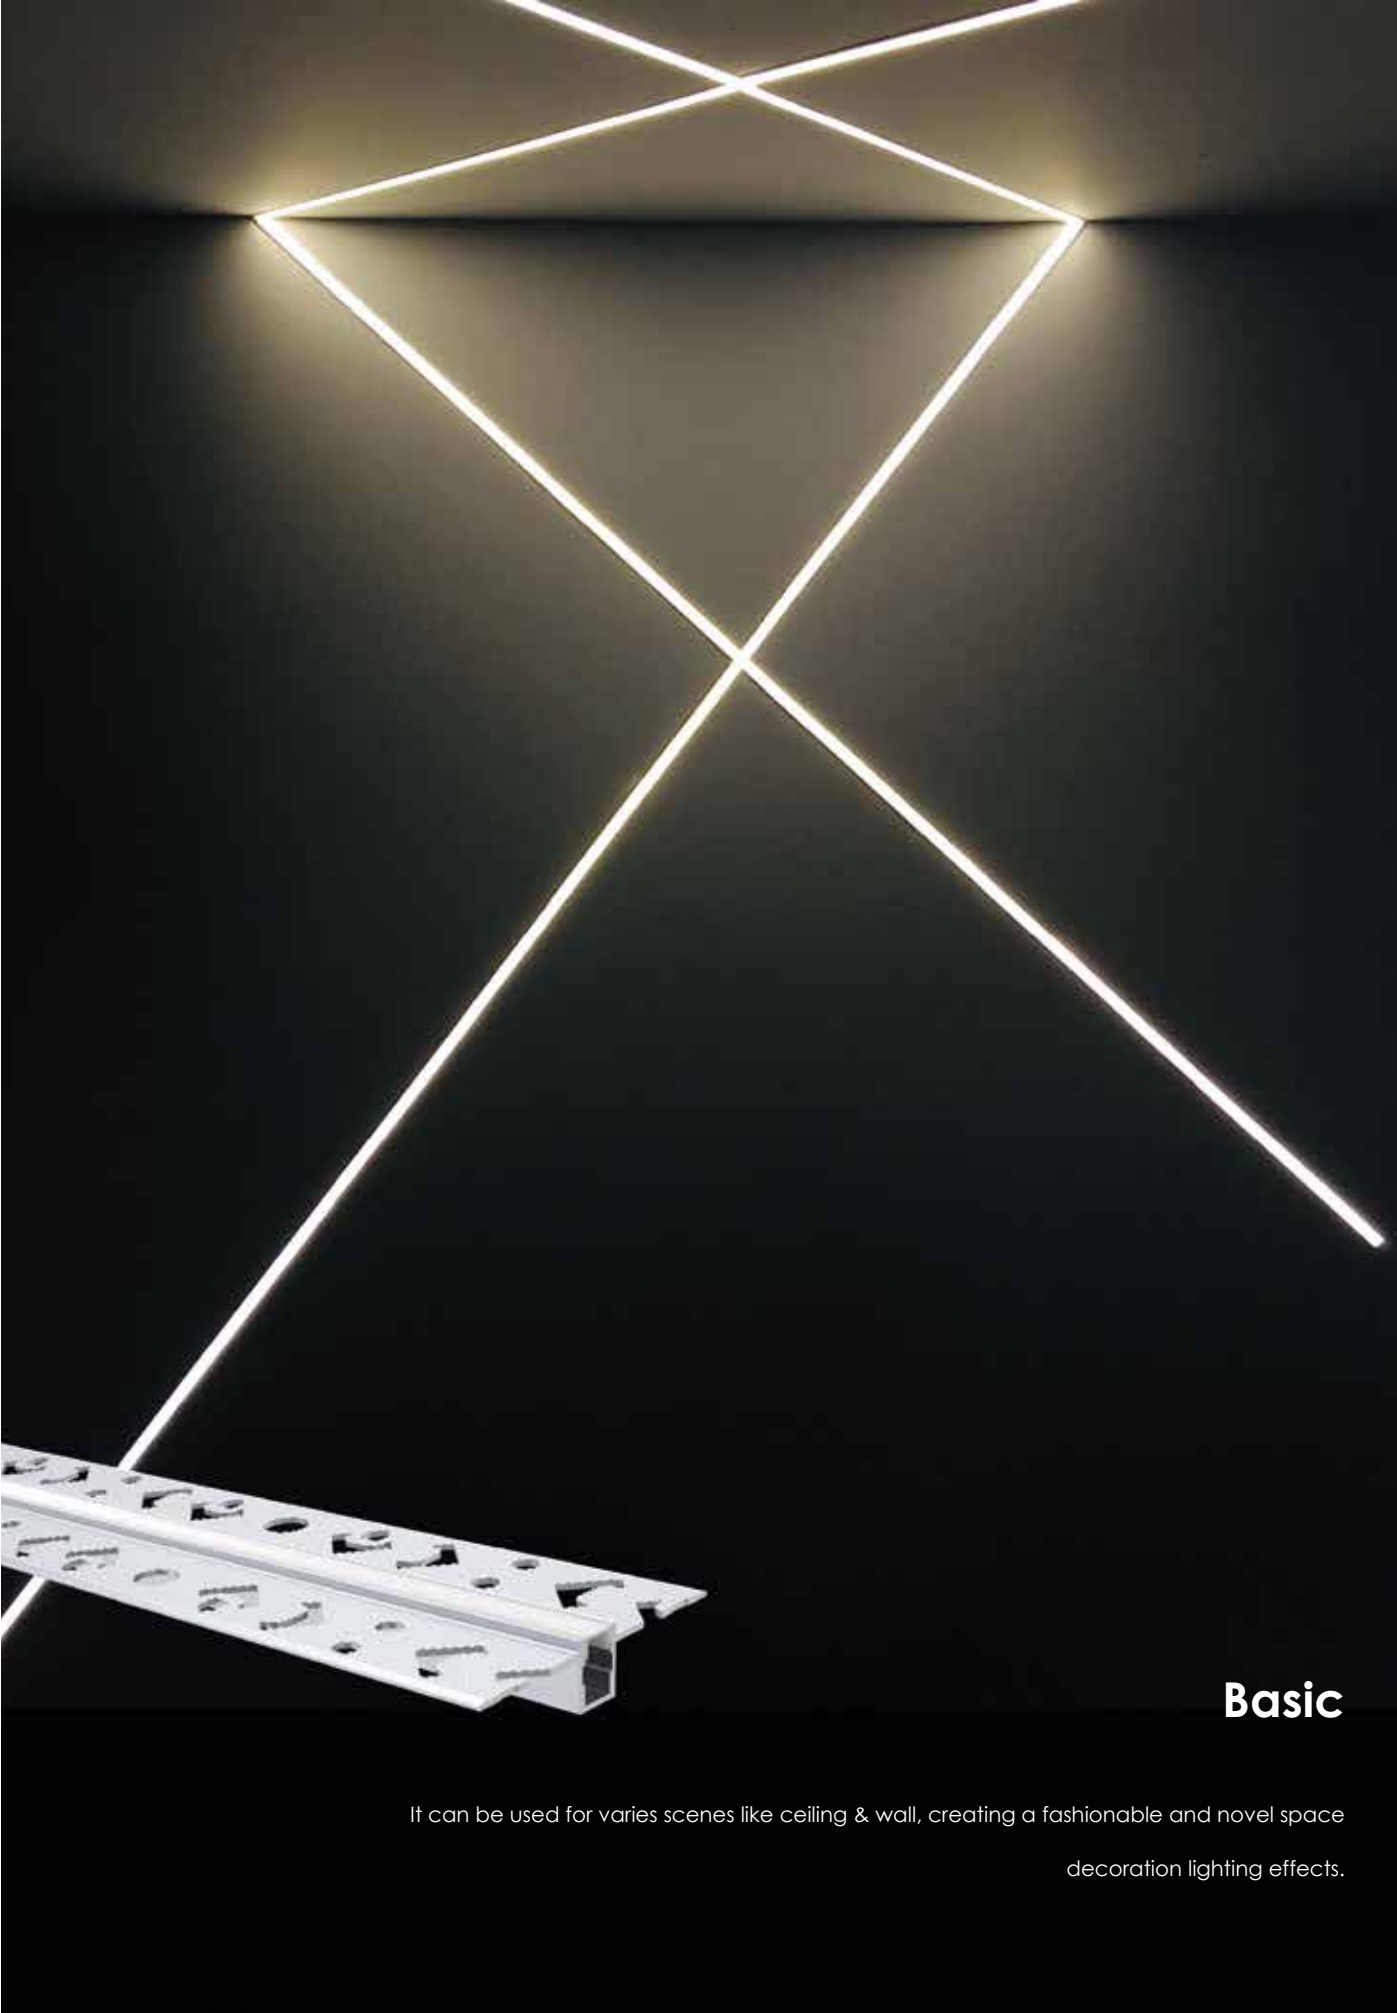


Basic

It can be used for varies scenes like ceiling & wall, creating a fashionable and novel space decoration lighting effects.

IP20



2500mm



47.8mm
5.2mm
8.8mm
8mm
12mm

Flexible Strip



LX-ST-D6140-24V-4mm

Profile Components




Profilex1
Diffuserx1
Black Microprism Diffuserx1
End capx2
End cap with holex2

	LX-PL-LR0812
	6.6W/m
	24V
	710Lm/m
	140LEDs
Ra	>90

IP20



2500mm



56mm
11.4mm
9.8mm
16mm
13mm

Flexible Strip



LX-ST-D6140-24V-8mm

Profile Components




Profilex1
Diffuserx1
Black Microprism Diffuserx1
End capx2
End cap with holex2

	LX-PL-LR1613
	6.6W/m
	24V
	710Lm/m
	140LEDs
Ra	>90

IP20



2500mm



60mm
15mm
18mm
20mm
15mm

Flexible Strip



LX-ST-D6280-24V-8mm


Profile Components




Profilex1
Diffuserx1
Microprism Diffuserx1
Black Microprism Diffuserx1
End capx2
End cap with holex2

	LX-PL-LR2013
	15W/m
	24V
	1508Lm/m
	280LEDs
Ra	>90

IP20



2500mm



38.6mm
20.5mm
85mm
24mm

Flexible Strip



LX-ST-D8280-24V-20mm


Profile Components




Profilex1
Diffuserx1
End capx2

	LX-PL-LR3924
	20W/m
	24V
	>80 : 2300Lm/m - >95 : 2700Lm/m
	280LEDs
Ra	>80 / >95

IP20



2500mm



103mm
85.5mm
150mm
24mm

Flexible Strip




LX-ST-D8560-24V-85mm

Profile Components




Profilex1
Diffuserx1
End capx2


	LX-PL-LR10324
	40W/m
	24V
	>80 : 5050Lm/m - >95 : 4300Lm/m
	560LEDs
Ra	>80 / >95

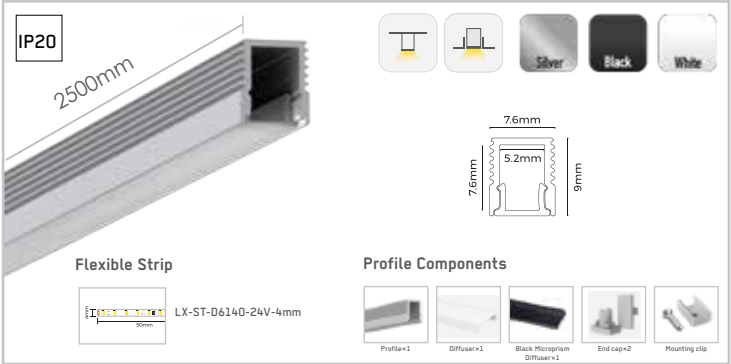


	LX-PL-LS0709
⚡	6.6W/m
💡	24V
💡	710Lm/m
👤	140LEDs
Ra	>90

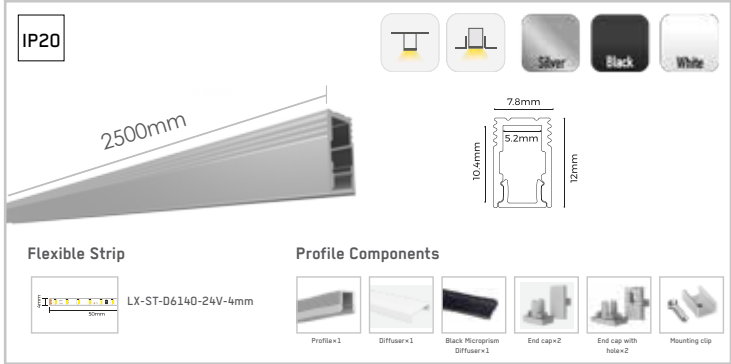


	LX-PL-LS0812
⚡	6.6W/m
💡	24V
💡	710Lm/m
👤	140LEDs
Ra	>90

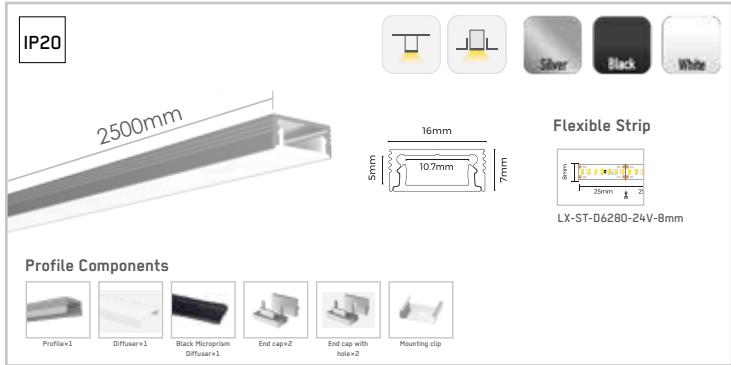


	LX-PL-LS1607
⚡	15W/m
💡	24V
💡	1650Lm/m
👤	280LEDs
Ra	>90

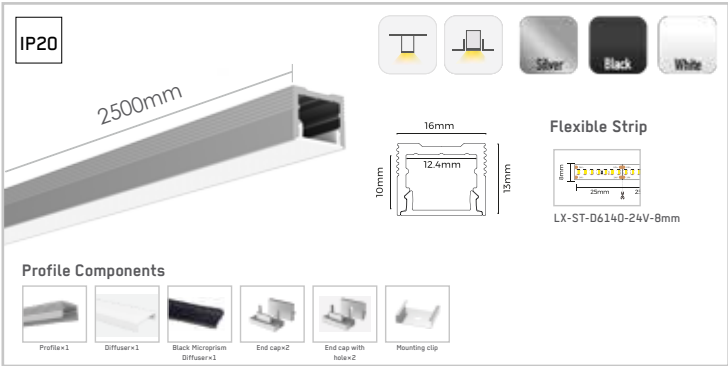

	LX-PL-LS1613
⚡	6.6W/m
💡	24V
💡	710Lm/m
👤	140LEDs
Ra	>90

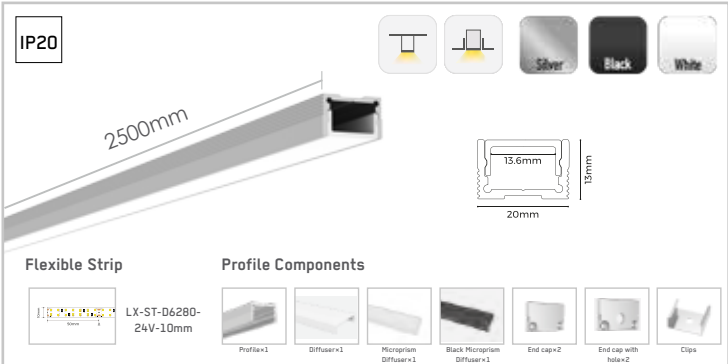


	LX-PL-LS2013
⚡	15W/m
💡	24V
💡	1508Lm/m
👤	280LEDs
Ra	>90

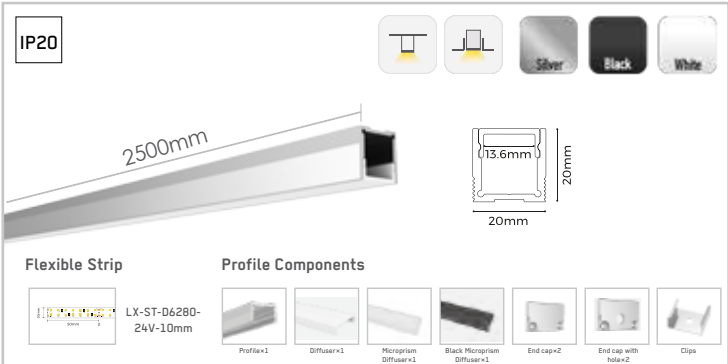

	LX-PL-LS2020
⚡	15W/m
💡	24V
💡	1508Lm/m
👤	280LEDs
Ra	>90

IP20




Flexible Strip

 LX-ST-D6140-24V-4mm

Profile Components









	LX-PL-LE1212
	6.6W/m
	24V
	710Lm/m
	140LEDs
Ra	>90

IP20

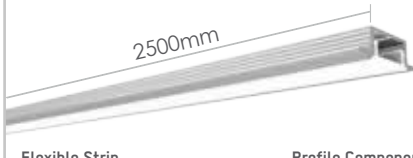


Flexible Strip

 LX-ST-D6280-24V-8mm


Profile Components








	LX-PL-LE2507
	15W/m
	24V
	1650Lm/m
	280LEDs
Ra	>90

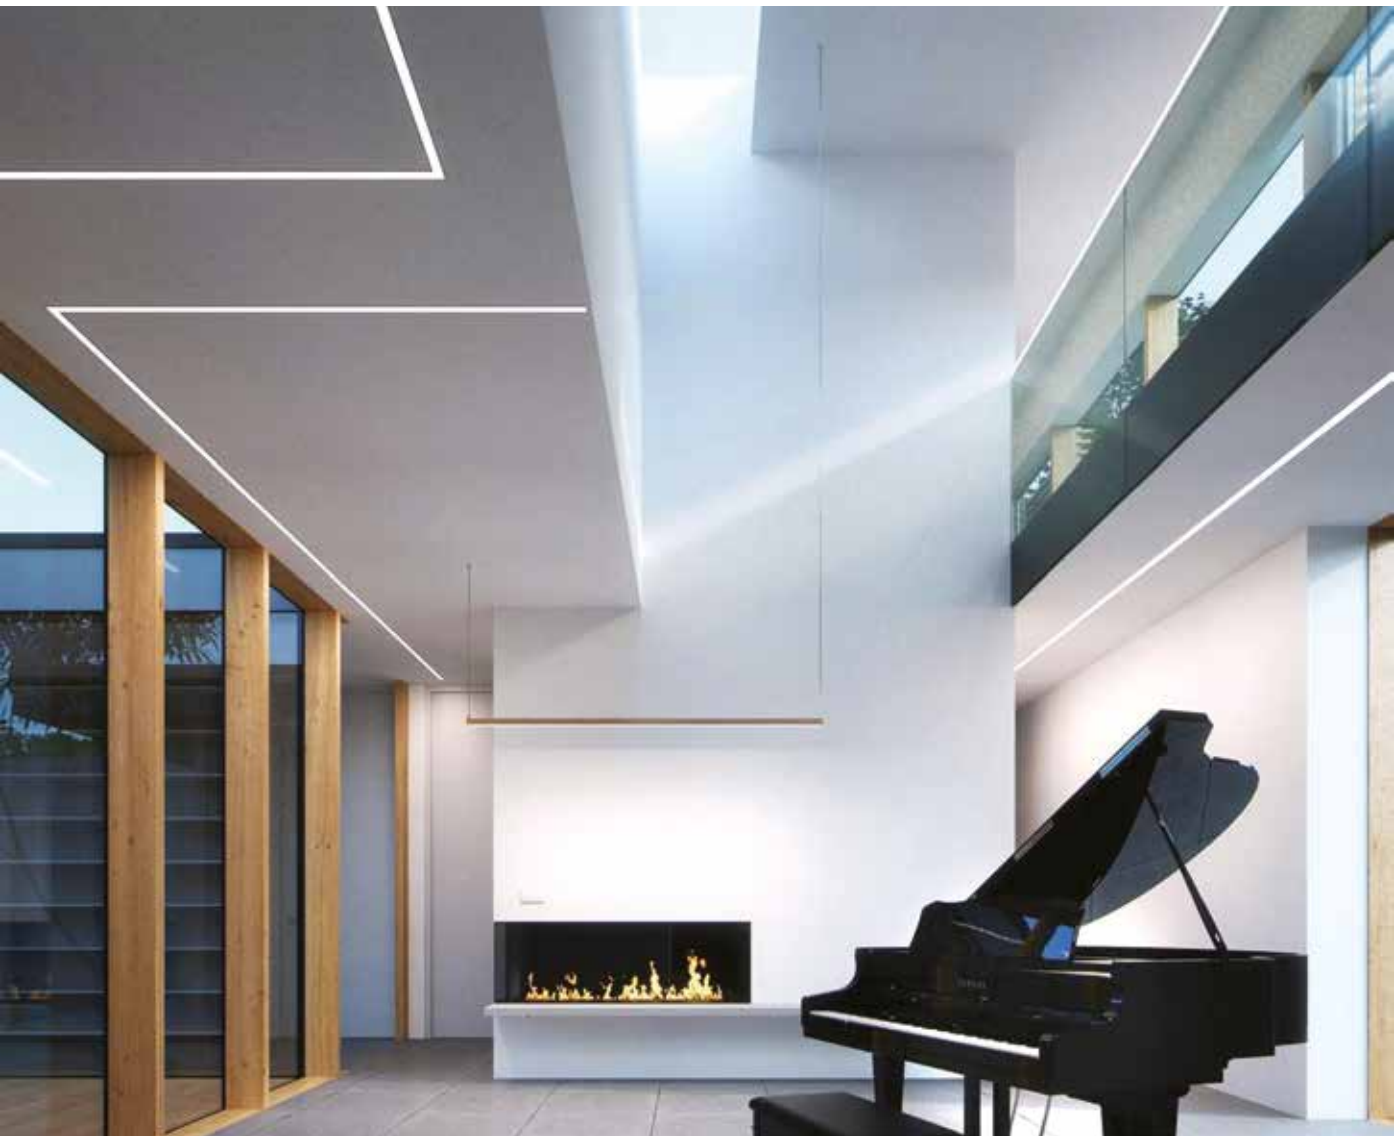

IP20

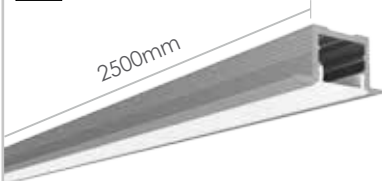


Flexible Strip

 LX-ST-D6140-24V-8mm

Profile Components








	LX-PL-LE2513
	6.6W/m
	24V
	710Lm/m
	140LEDs
Ra	>90

IP20

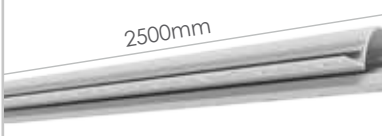


Flexible Strip

 LX-ST-DB168-24V-10mm

Profile Components







	LX-PL-LR3735
	16.2W/m
	24V
	1860Lm/m
	168LEDs
Ra	>90



Gypsum Lighting

Combine lighting with plaster line elements to replace traditional plaster lines, so to achieve the lighting effect of wall washing & hidden light source

IP20

2500mm

Flexible Strip

LX-ST-D6140-24V-8mm

Profile Components

	LX-PL-LG7043
	6.6W/m
	24V
	710Lm/m
	140LEDs
Ra	>90

IP20

2500mm

Flexible Strip

LX-ST-D6140-24V-8mm

Profile Components


	LX-PL-LG7070
	6.6W/m
	24V
	710Lm/m
	140LEDs
Ra	>90






Floor Lighting


IK10, IP65 Waterproof level design, can be widely used in indoor and outdoor floors, sidewalks, bicycle lanes, parking lots others scenes

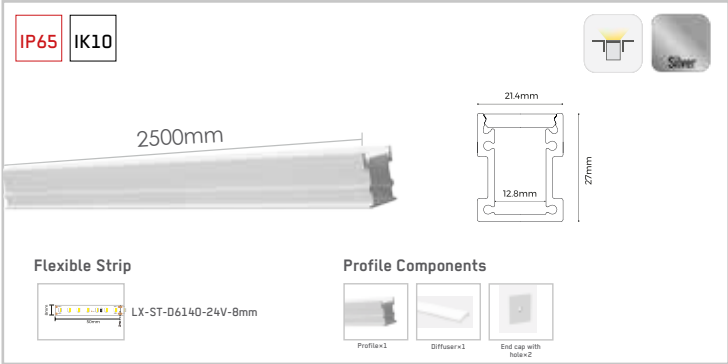

	LX-PL-LS2126
⚡	6.6W/m
💡	24V
💡	710Lm/m
💡	140LEDs
Ra	>90

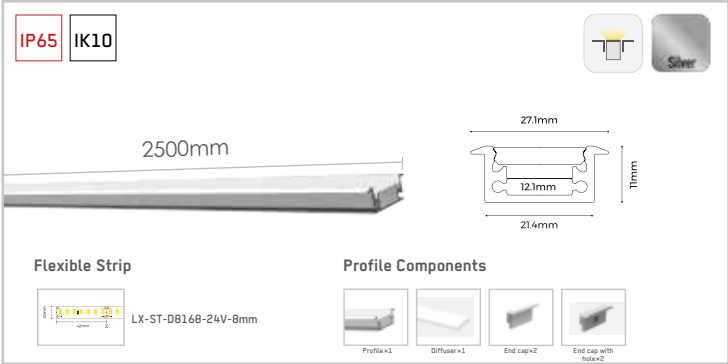


	LX-PL-LE2711
⚡	16.2W/m
💡	24V
💡	1860Lm/m
💡	168LEDs
Ra	>90

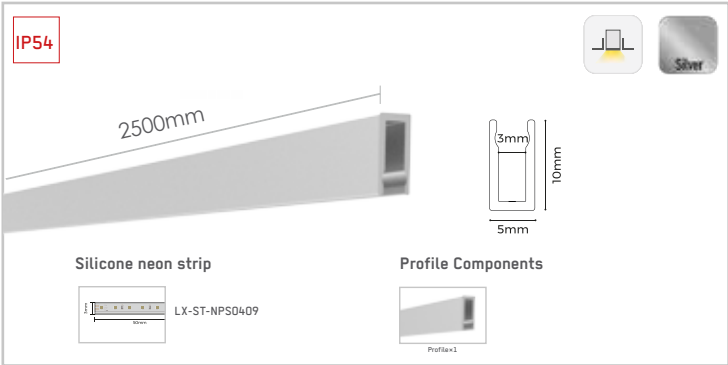


	LX-PL-LS0510
⚡	5W/m
💡	24V
💡	70Lm/m
💡	140LEDs
Ra	>90



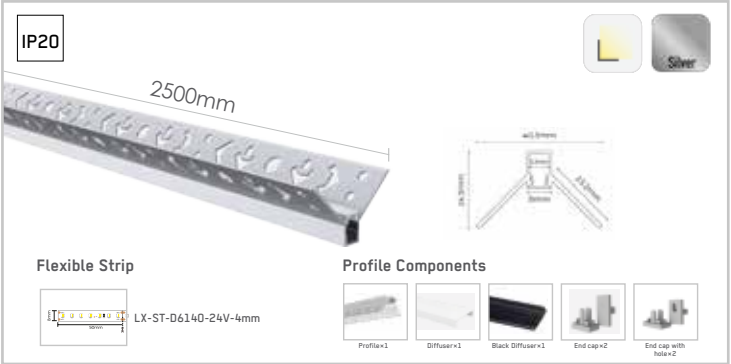

	LX-PL-LG2323
⚡	6.6W/m
🔌	24V
💡	710Lm/m
👤	140LEDs
Ra	>90

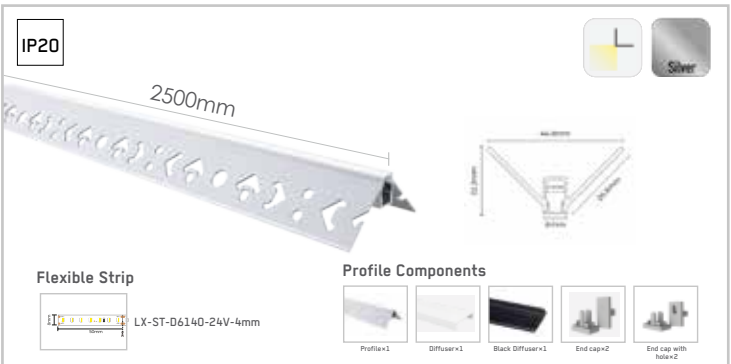

	LX-PL-LG2727
⚡	6.6W/m
🔌	24V
💡	710Lm/m
👤	140LEDs
Ra	>90



IP20



2500mm

Flexible Strip



LX-ST-D6140-24V-8mm

Profile Components

Profilex1


Diffuserx1

End capx2

End cap with holex2

Mounting clip





16mm
8mm
16mm

	LX-PL-LG1616C
	6.6W/m
	24V
	710Lm/m
	140LEDs
Ra	>90

IP20



2500mm

Flexible Strip



LX-ST-D6140-24V-8mm

Profile Components

Profilex1


Diffuserx1

End capx2

End cap with holex2

Mounting clip





16mm
8mm
16mm

	LX-PL-LG1616K
	6.6W/m
	24V
	710Lm/m
	140LEDs
Ra	>90



IP20



2500mm

Flexible Strip



LX-ST-D6280-24V-10mm

Profile Components

Profilex1

Diffuserx1

End capx2

End cap with holex2

Mounting clip





30mm
15mm
30mm

	LX-PL-LG3030C
	15W/m
	24V
	1508Lm/m
	280LEDs
Ra	>90

IP20



2500mm

Flexible Strip



LX-ST-D6280-24V-10mm

Profile Components

Profilex1


Diffuserx1

End capx2

End cap with holex2

Mounting clip





30mm
15mm
30mm

	LX-PL-LG3030K
	15W/m
	24V
	1508Lm/m
	280LEDs
Ra	>90





Edge Lighting

Hidden lighting design, use light to outline the edge, create an atmosphere, and achieve the lighting effect of not seeing the light.

IP20

Flexible Strip

LX-ST-D6140-24V-8mm

Profile Components

IP20

Flexible Strip

LX-ST-D6140-24V-8mm

Profile Components

IP20

Flexible Strip

LX-ST-D6280-24V-8mm

Profile Components

IP20

Flexible Strip

LX-ST-D6280-24V-8mm

Profile Components

IP20

Flexible Strip

LX-ST-D8280-24V-20mm

Profile Components

	LX-PL-LE1616
⚡	6.6W/m
🔌	24V
💡	710Lm/m
👤	140LEDs
Ra	>90


	LX-PL-LR1616
⚡	6.6W/m
🔌	24V
💡	710Lm/m
👤	140LEDs
Ra	>90

	LX-PL-LR3840A
⚡	15W/m
🔌	24V
💡	1650Lm/m
👤	280LEDs
Ra	>90


	LX-PL-LR3840B
⚡	15W/m
🔌	24V
💡	1650Lm/m
👤	280LEDs
Ra	>90

	LX-PL-LR3943
⚡	20W/m
🔌	24V
💡	>80 : 2300Lm/m - >95 : 2700Lm/m
👤	280LEDs
Ra	>80 / >95

Linear Lighting Solution

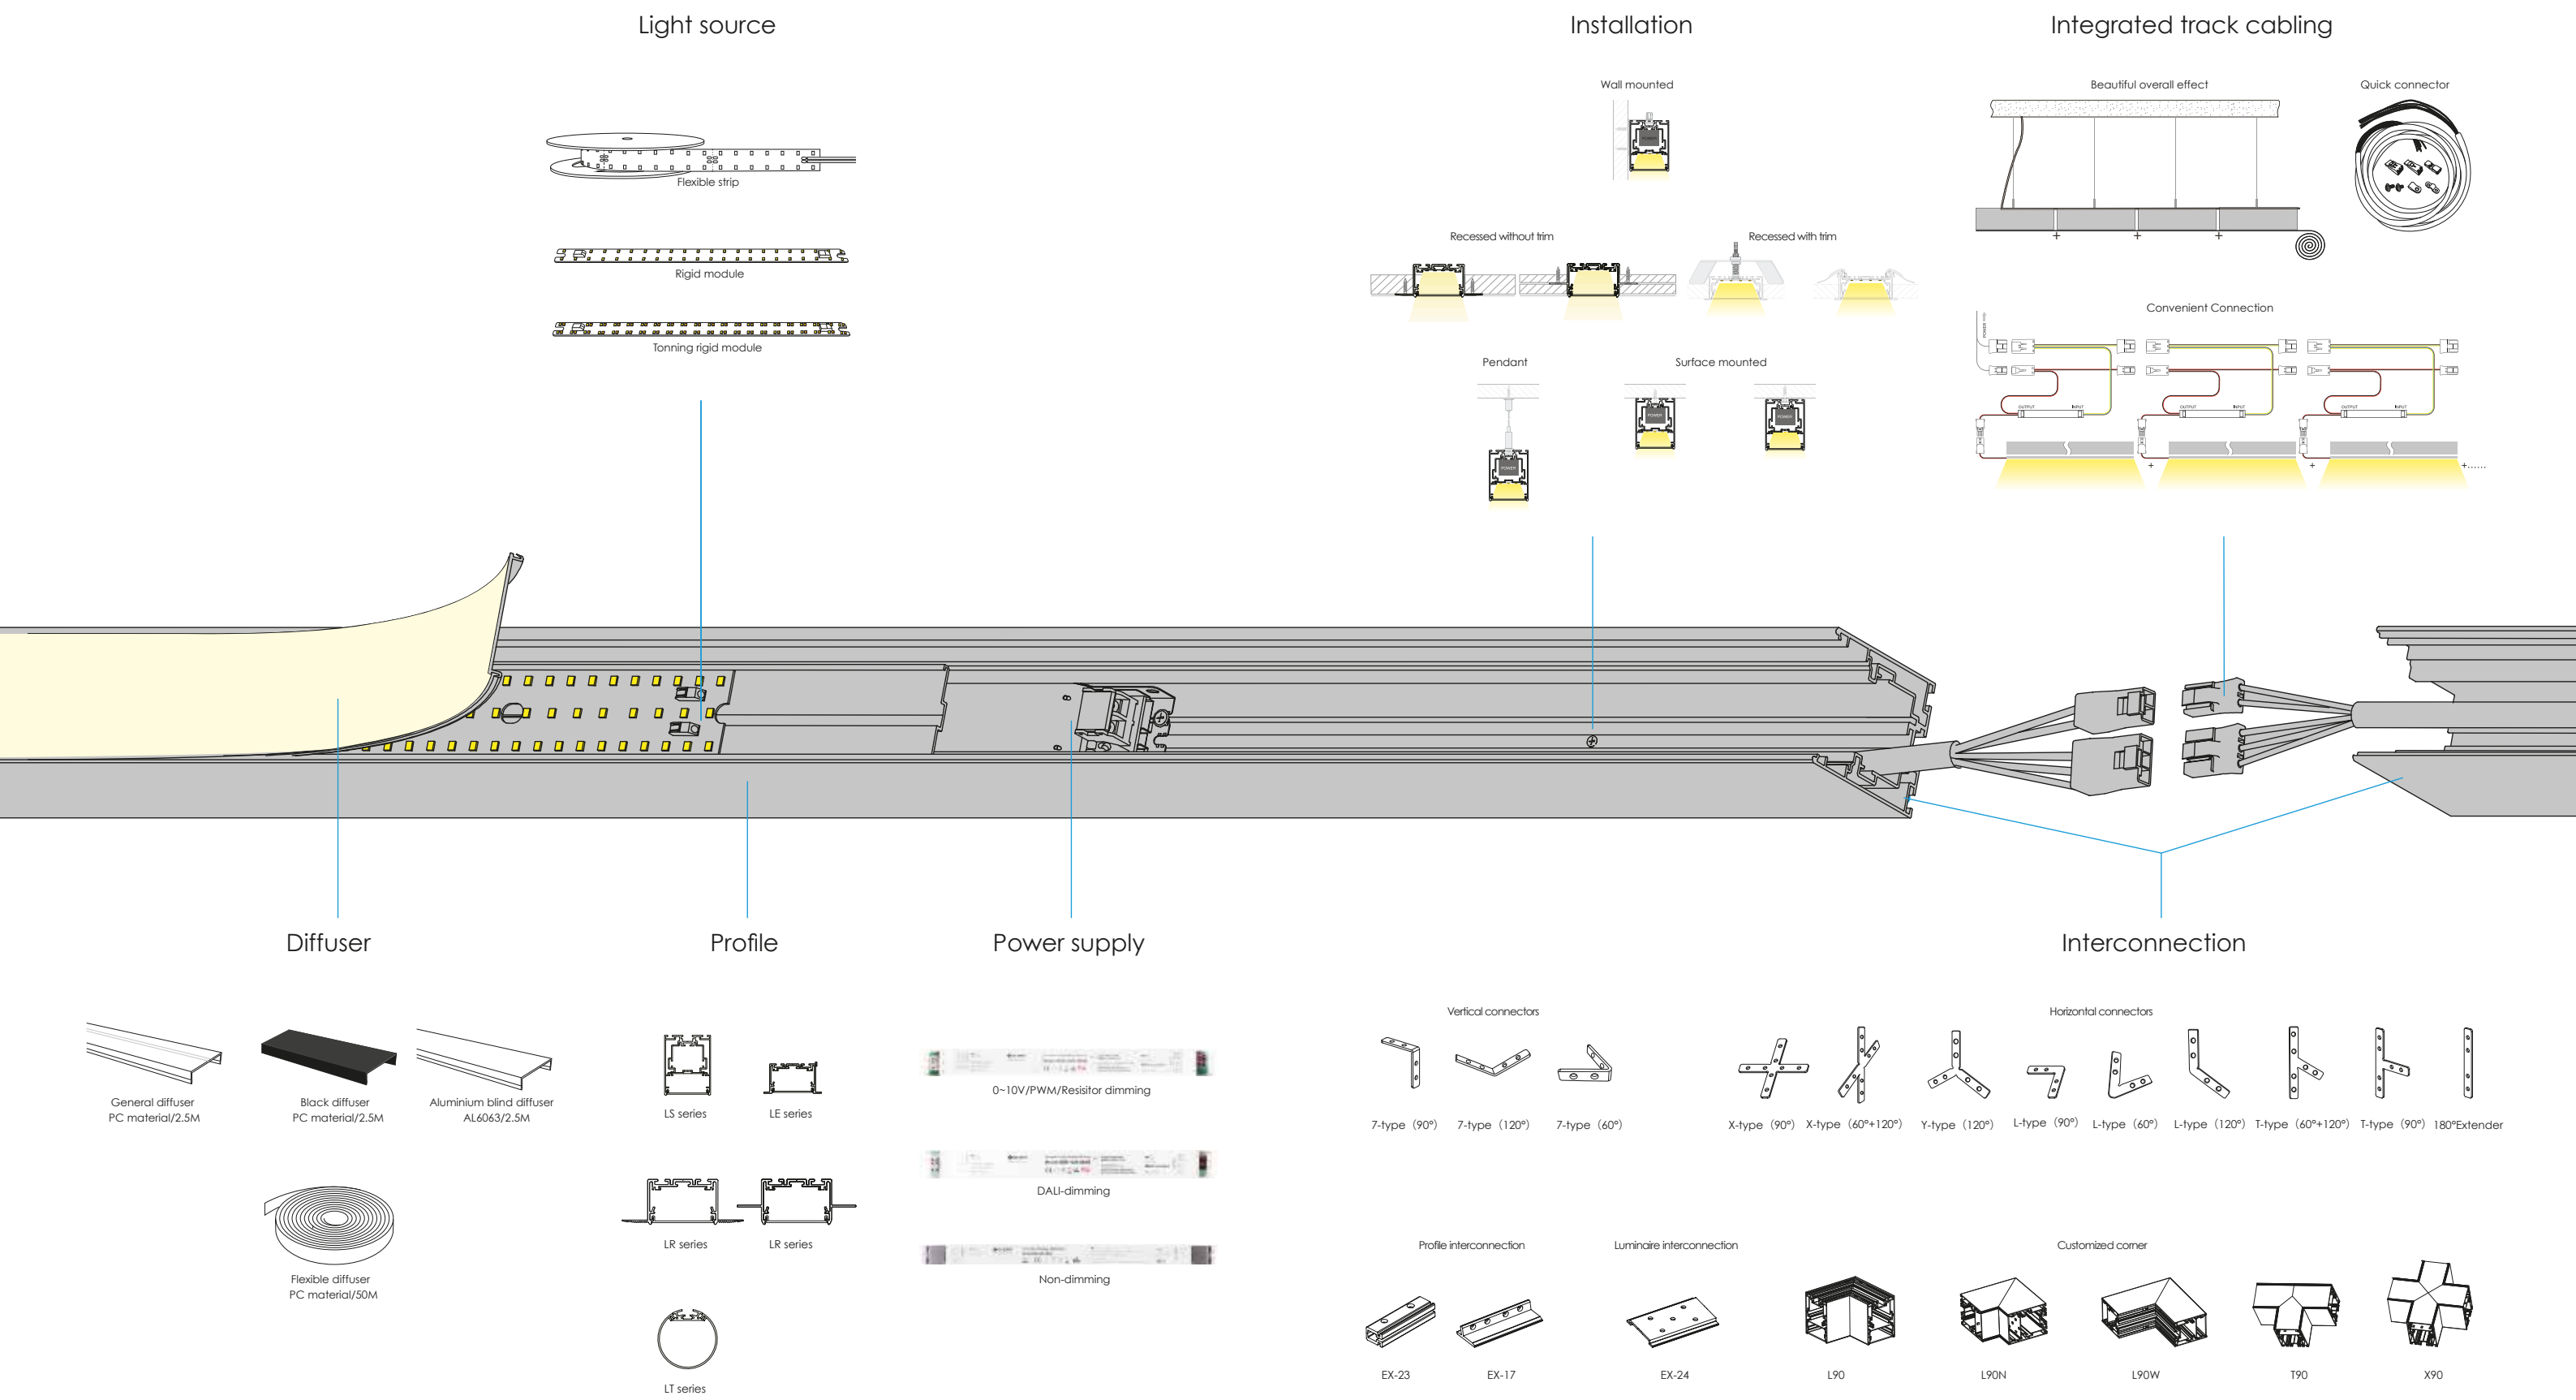

Installation

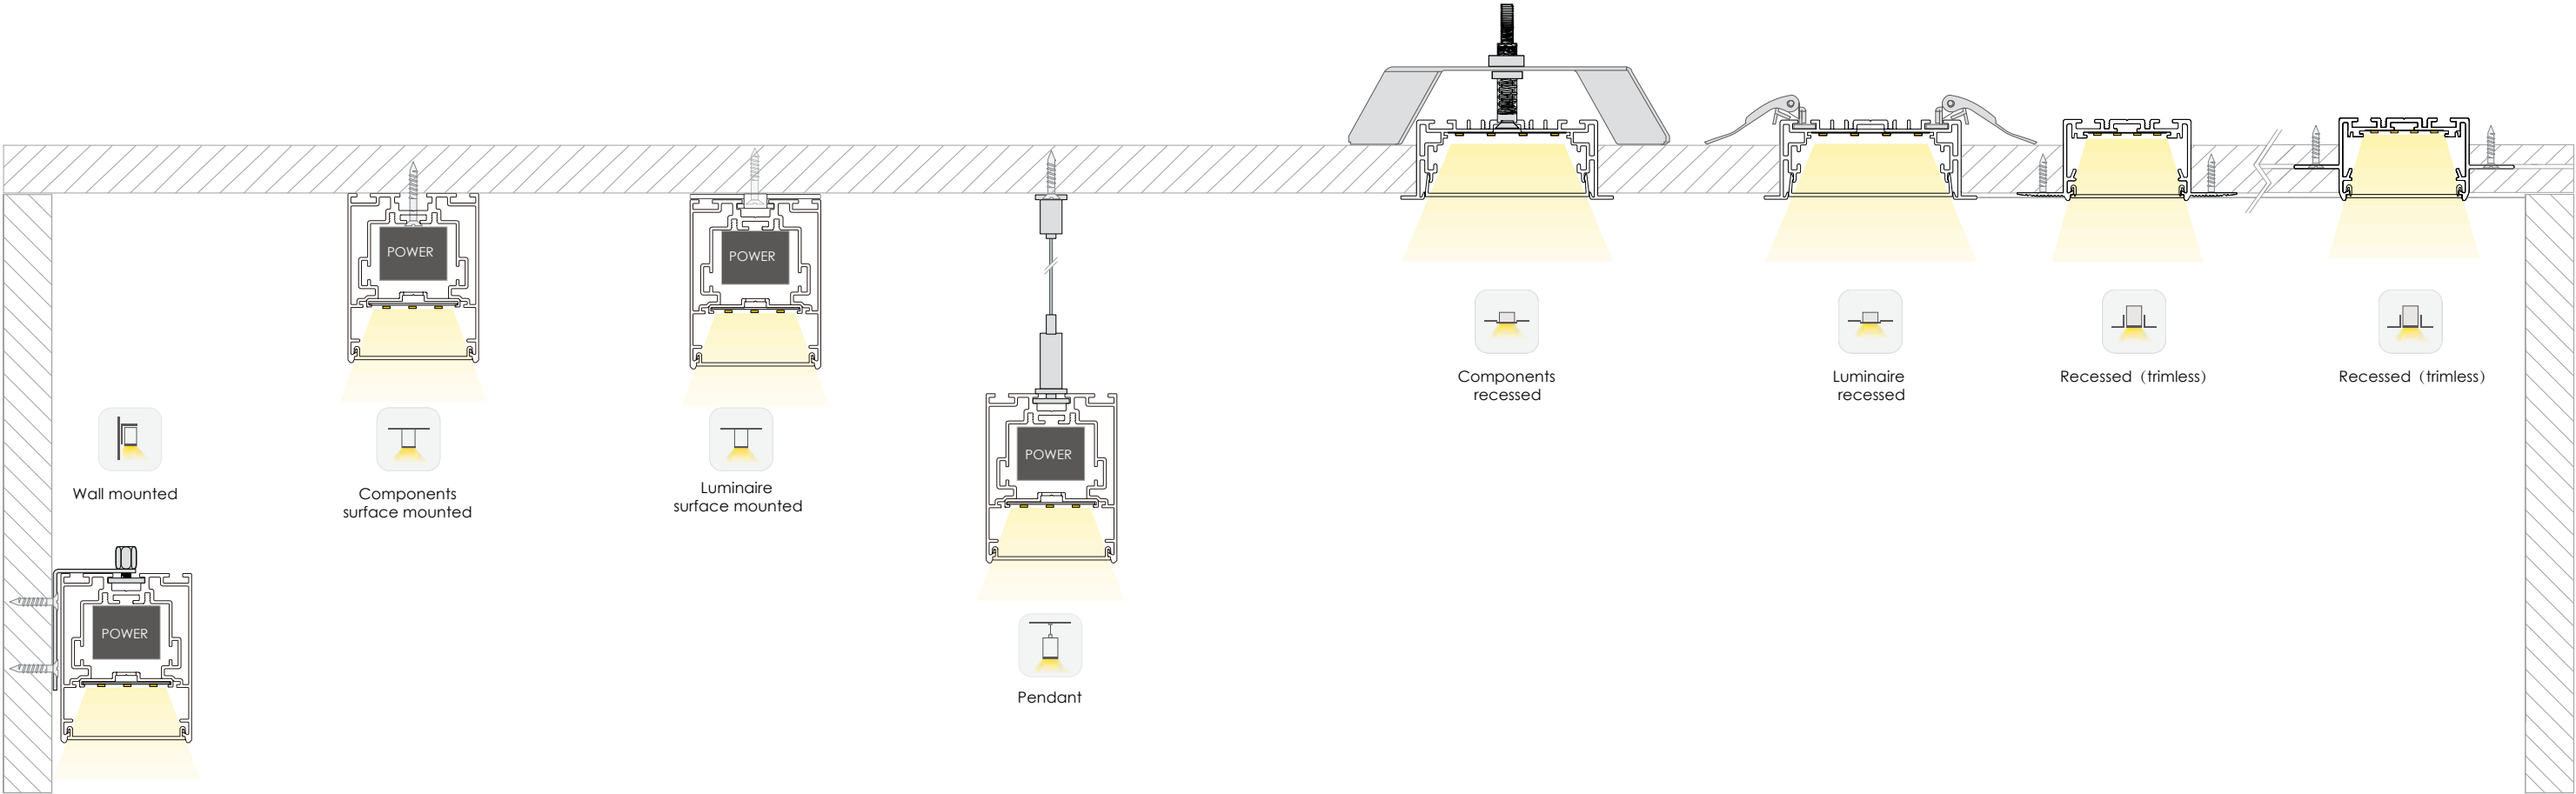

Stylish Lighting Application

Extension of Straight Line

Available for single luminaire use, in orderly Arrangement and ultra-long interconnection for limitless extension.



Single luminaire use, any size can be customized.


1.2M	2.5M	A	
1.2M	2.5M	B	
1.2M	2.5M	C	
1.2M	2.5M	D	

Ultra long interconnection, no light leakage with the 50m flexible diffuser.




Planar Interconnection

Horizontal interconnection, lighting upward&downward; vertical interconnection, lighting inward&outward.

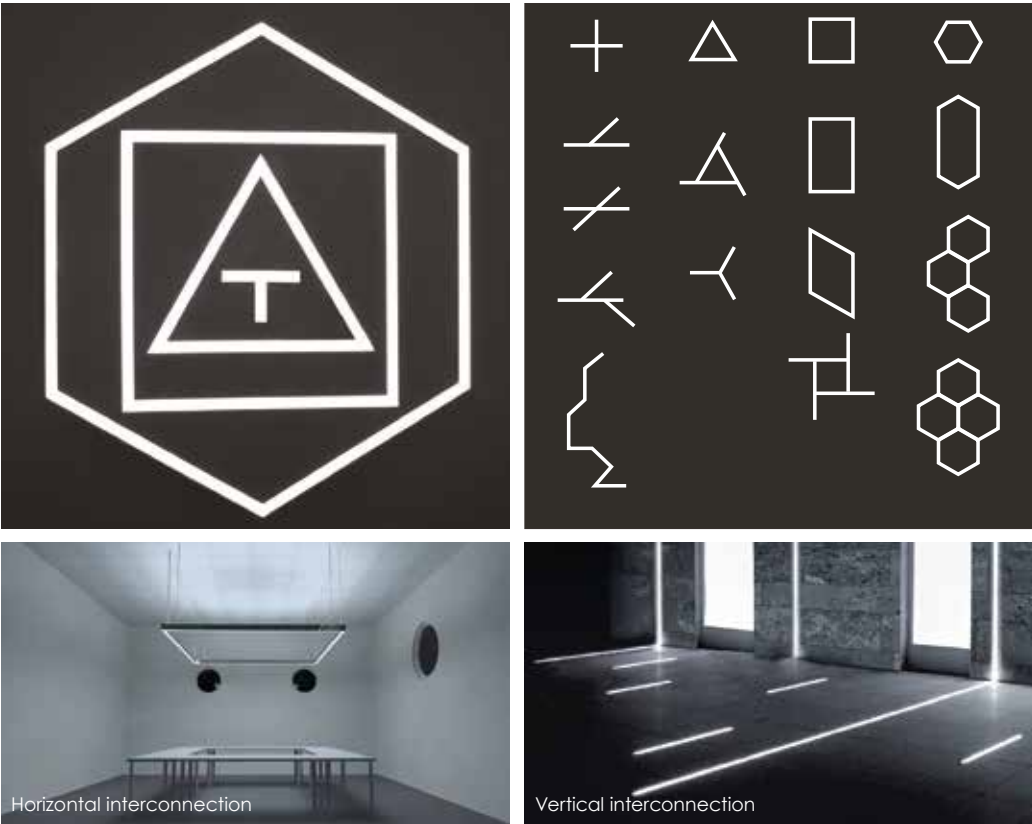

3D Style

Shuttle freely along the edge of ceiling& wall& floor

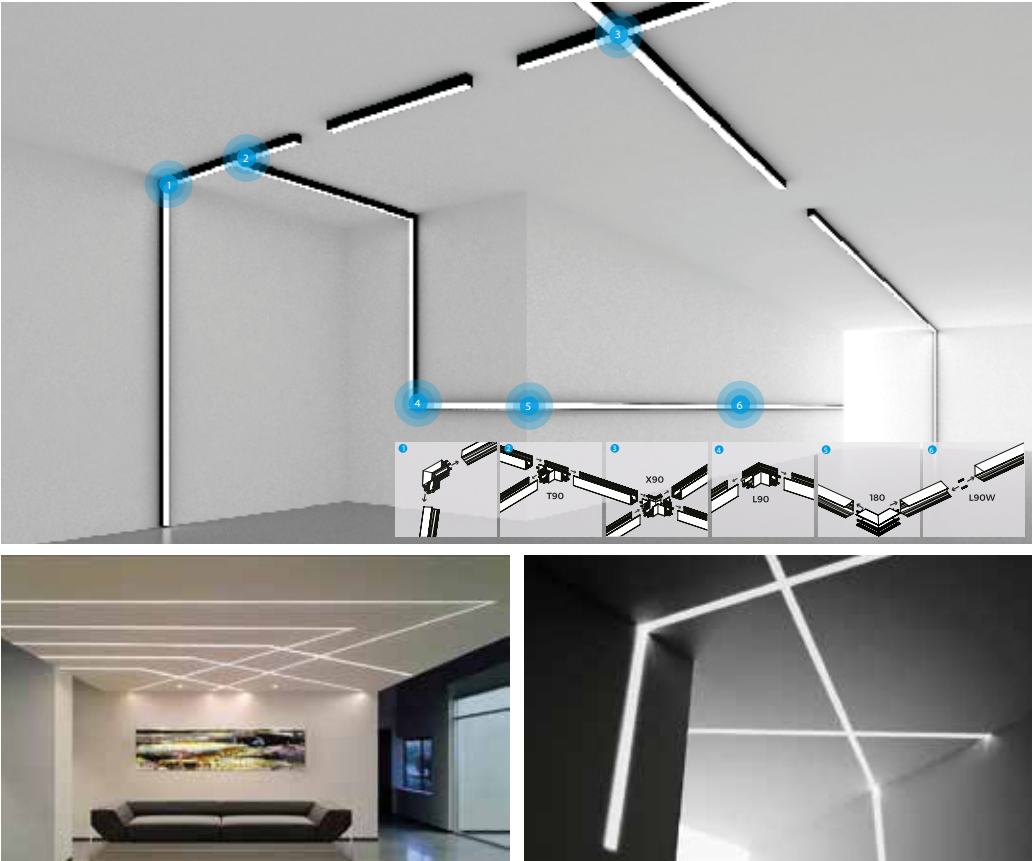

IP20

Flexible Strip & Rigid modular

LX-ST-08280-24V-34mm

LX-ST-085403W24V-34mm

LX-ST-058320-48V-34m

Profile Components

Profilex1

Diffuserx1

Flexible diffuser

Aluminium blind diffuser

Black diffuser

End capx2

Quick lockx4

	LX-PL-LS5470(F)
⚡	25W/m
🔌	24V/48V
💡	24V : >80 : 2760Lm/m - >95 : 3250Lm/m 48V : >80 - >95 : 3100Lm/m
👤	48V : 320LEDs - 24V : 280-560LEDs
Ra	>80/>95

IP20

Flexible Strip & Rigid modular

LX-ST-08x20-24V-59mm

LX-ST-058480-48V-59mm

LX-ST-018x20-24V-62mm

Profile Components

Profilex1

Diffuserx1

End capx2

Quick lockx4

	LX-PL-LS7977
⚡	30W/m
🔌	24V/48V
💡	24V : >80 : 3310Lm/m - >95 : 3900Lm/m 48V : >80 - >90 : 4600Lm/m
👤	48V : 420LEDs - 24V : 480LEDs
Ra	>80/>90/>95



IP20

Flexible Strip & Rigid modular

LX-ST-D6280- 24V-10mm

LX-ST-DY8280-24V17mm

Profile Components

Profilex1

Diffuserx1

End capx2

Quick lockx4

	LX-PL-LS3360
⚡	20W/m
🔌	24V
💡	>80 : 2290Lm/m - >95 : 2700Lm/m
👤	280LEDs
Ra	>80/>95

IP20

Flexible Strip & Rigid modular

LX-ST-D6280- 24V-10mm

LX-ST-DY8280-24V17mm

Profile Components

Profilex1

Diffuserx1

End capx2

Quick lockx4

	LX-PL-LS4067
⚡	20W/m
🔌	24V
💡	>80 : 2290Lm/m - >95 : 2700Lm/m
👤	280LEDs
Ra	>80/>95

IP20

Flexible Strip & Rigid modular

LX-ST-08280-24V-20mm

LX-ST-058320-48V-20mm

Profile Components

Profilex1


Diffuserx1

End capx2

	LX-PL-LT60
⚡	20W/m
🔌	24V/48V
💡	24V : >80 : 2700Lm/m - >95 : 2290Lm/m 48V : >80 - >90 : 3100Lm/m
👤	48V : 320LEDs - 24V : 280LEDs
Ra	>80/>90/>95




IP20



2500mm





27mm
55mm
35mm

Flexible Strip & Rigid modular



LX-ST-DB280-24V-20mm
LX-ST-DB320-48V-20mm
LX-ST-DB280-24V-23mm

Profile Components



Profilex1
Diffuserx1
End capx2


	LX-PL-LE5535
	20W/m
	24V/48V
	24V : >80 : 2290Lm/m - >95 : 2700Lm/m 48V : >80 - >95 : 3100Lm/m
	48V : 320LEDs - 24V : 280LEDs
Ra	>80/>95

IP20



2500mm





55mm
37mm
26.8mm
69mm
35mm

Flexible Strip & Rigid modular



LX-ST-DB280-24V-34mm
LX-ST-DB560SWW24V-34mm
LX-ST-DB320-48V-34mm


Profile Components



Profilex1
Diffuserx1
Flexible diffuser
Aluminum blind diffuser
Black diffuser
End capx2


	LX-PL-LE6935(F)
	25W/m
	24V/48V
	24V : >80 : 2760Lm/m - >95 : 3250Lm/m 48V : >80 - >95 : 3500Lm/m
	48V : 320LEDs - 24V : 280-560LEDs
Ra	>80/>95

IP20



2500mm





55mm
37.5mm
95mm
35mm

Flexible Strip & Rigid modular



LX-ST-DB280-24V-34mm
LX-ST-DB560SWW24V-34mm
LX-ST-DB320-48V-34mm

Profile Components



Profilex1
Diffuserx1
Flexible diffuser
Aluminum blind diffuser
Black diffuser
End capx2


	LX-PL-LR5535(A)
	25W/m
	24V/48V
	24V : >80 : 2760Lm/m - >95 : 3250Lm/m 48V : >80 - >95 : 3500Lm/m
	48V : 320LEDs - 24V : 280-560LEDs
Ra	>80/>95

IP20



2500mm





55mm
37.5mm
85mm
35mm

Flexible Strip & Rigid modular



LX-ST-DB280-24V-34mm
LX-ST-DB560SWW24V-34mm
LX-ST-DB320-48V-34mm


Profile Components



Profilex1
Diffuserx1
Flexible diffuser
Aluminum blind diffuser
Black diffuser
End capx2


	LX-PL-LR5535(B)
	25W/m
	24V/48V
	24V : >80 : 2760Lm/m - >95 : 3250Lm/m 48V : >80 - >95 : 3500Lm/m
	48V : 320LEDs - 24V : 280-560LEDs
Ra	>80/>95

IP20



2500mm





80mm
62.5mm
94mm
35mm

Flexible Strip & Rigid modular



LX-ST-DB420-24V-59mm
LX-ST-DB480-48V-59mm
LX-ST-DB420-24V-62mm

Profile Components




Profilex1
Diffuserx1
End capx2

	LX-PL-LE9435
	30W/m
	24V/48V
	24V : >80 : 3310Lm/m - >95 : 3900Lm/m 48V : >80 - >90 : 4600Lm/m
	48V : 420LEDs - 24V : 480LEDs
Ra	>80/>90/>95





Curve Lighting Solution

LX-PL-AS3535 Series

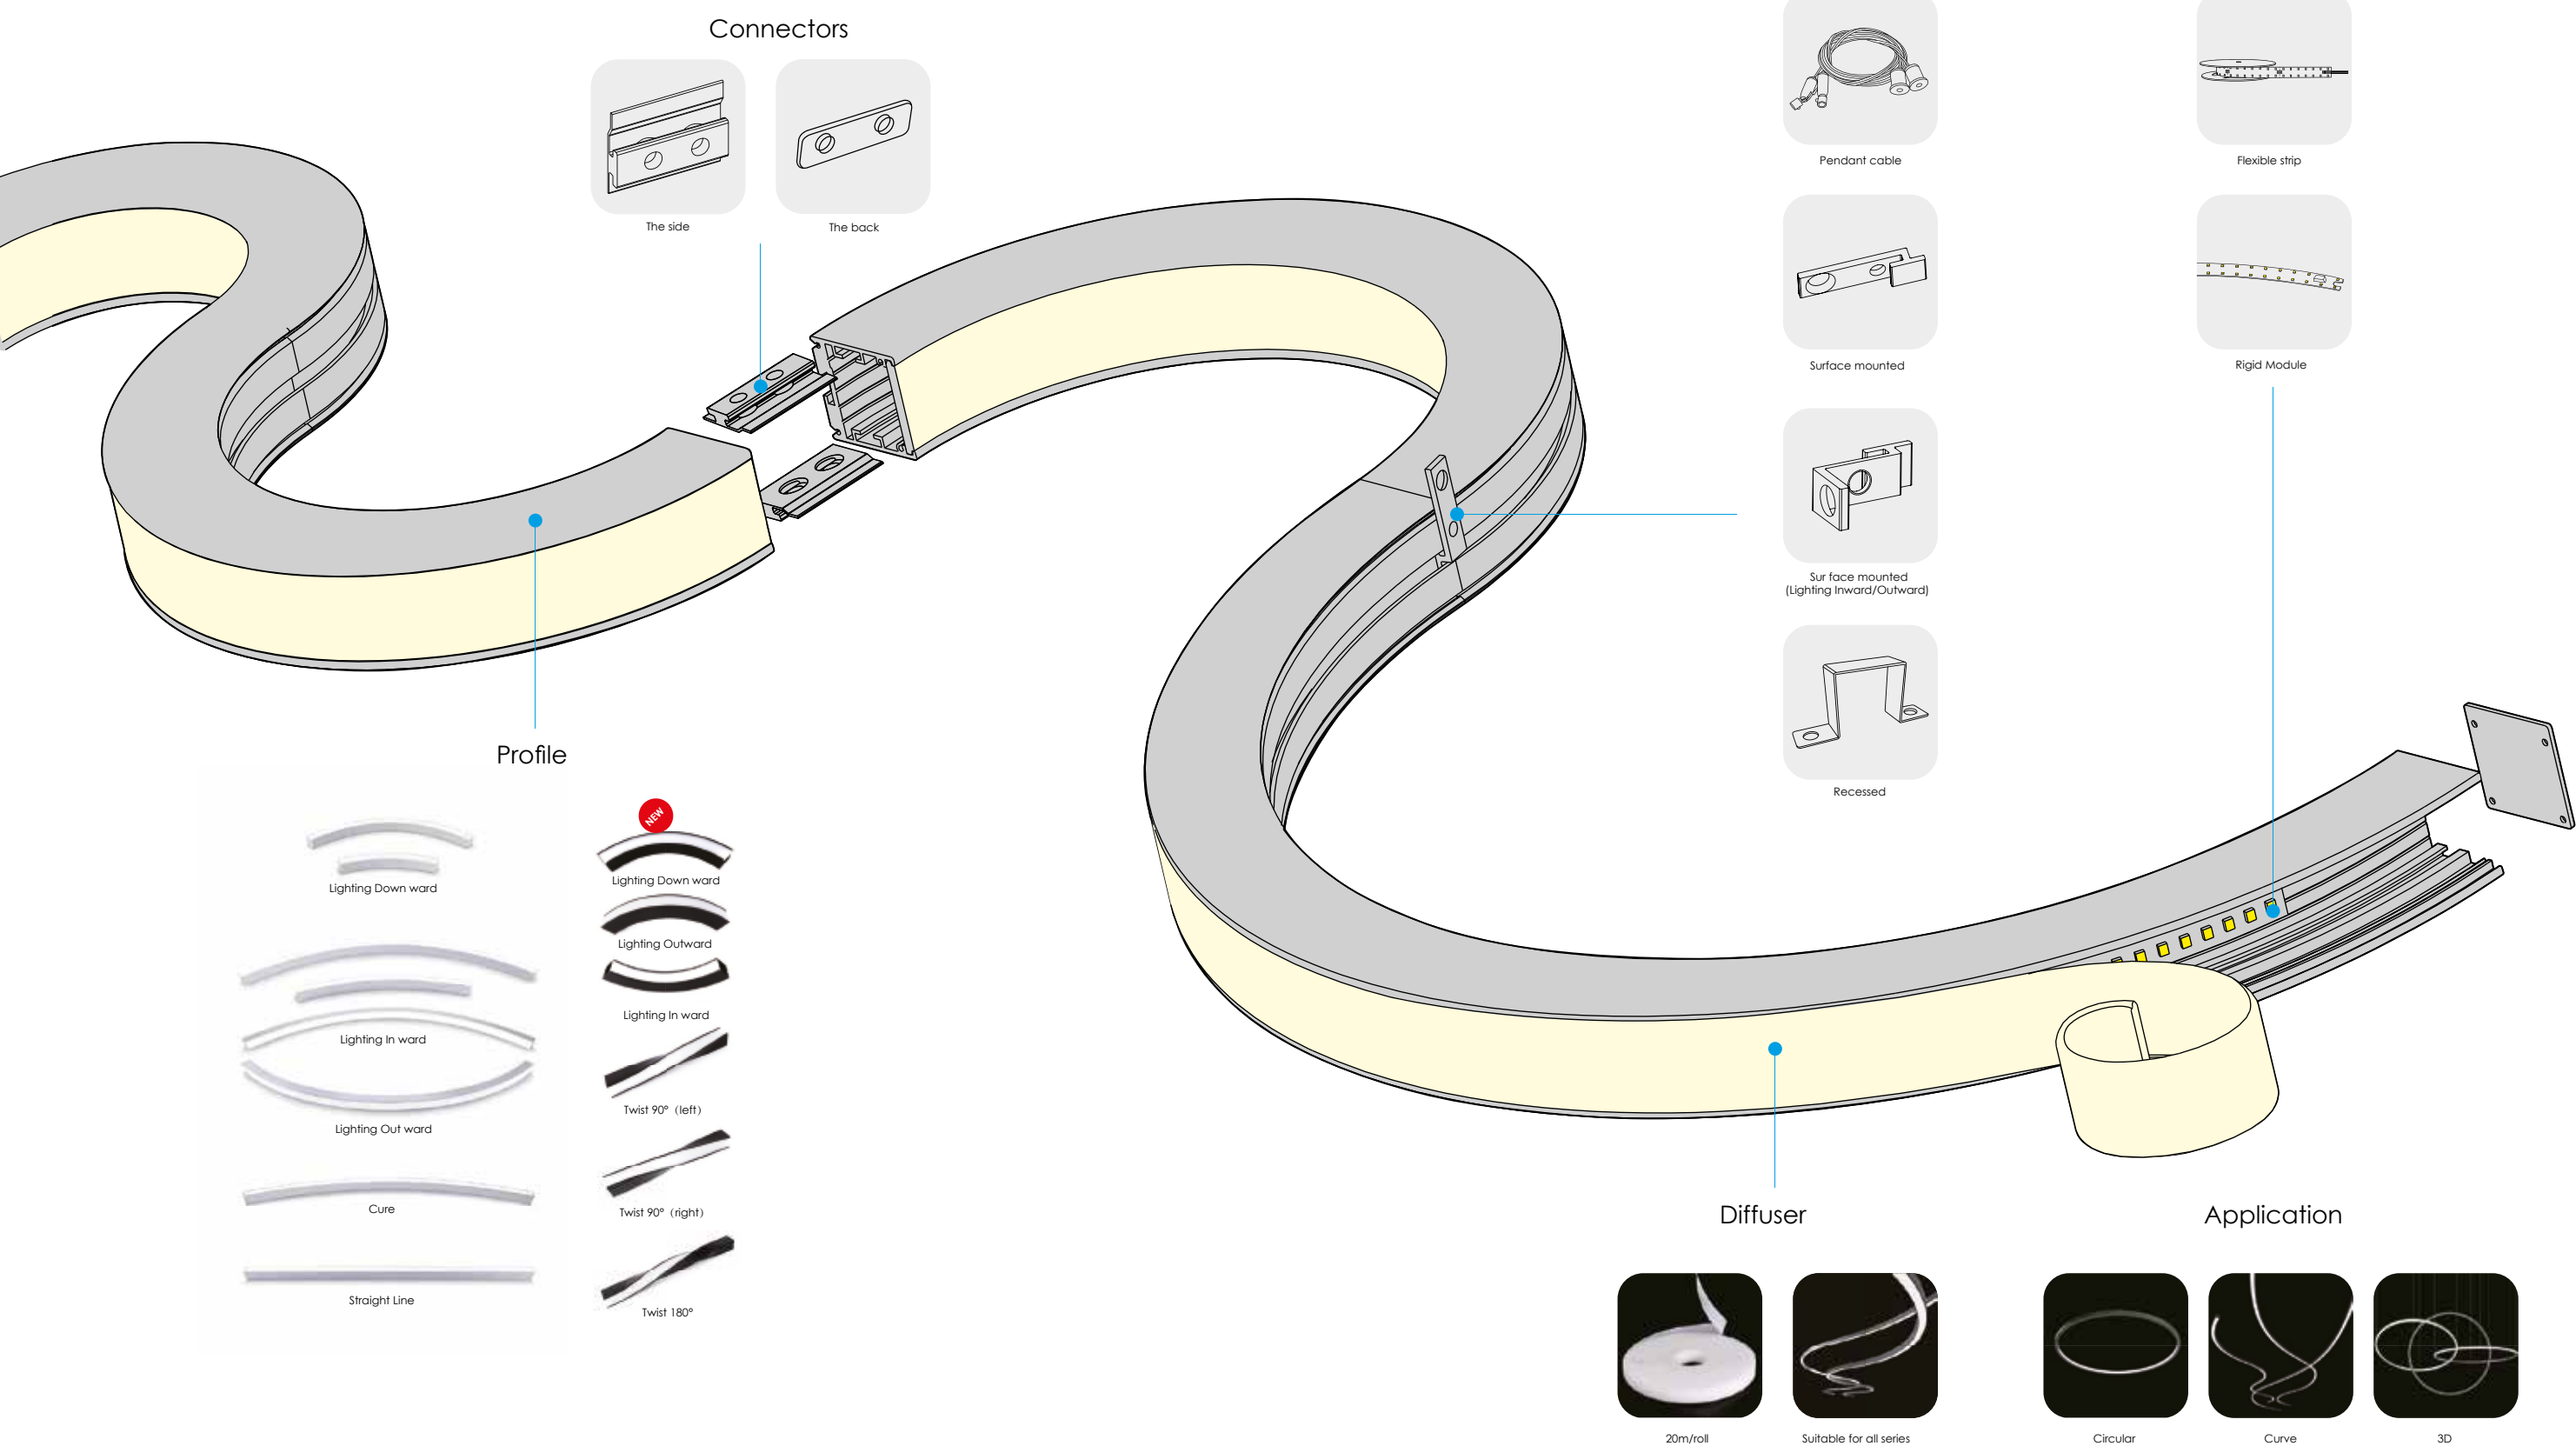

Basic Modules



LX-PL-AS3535 Series

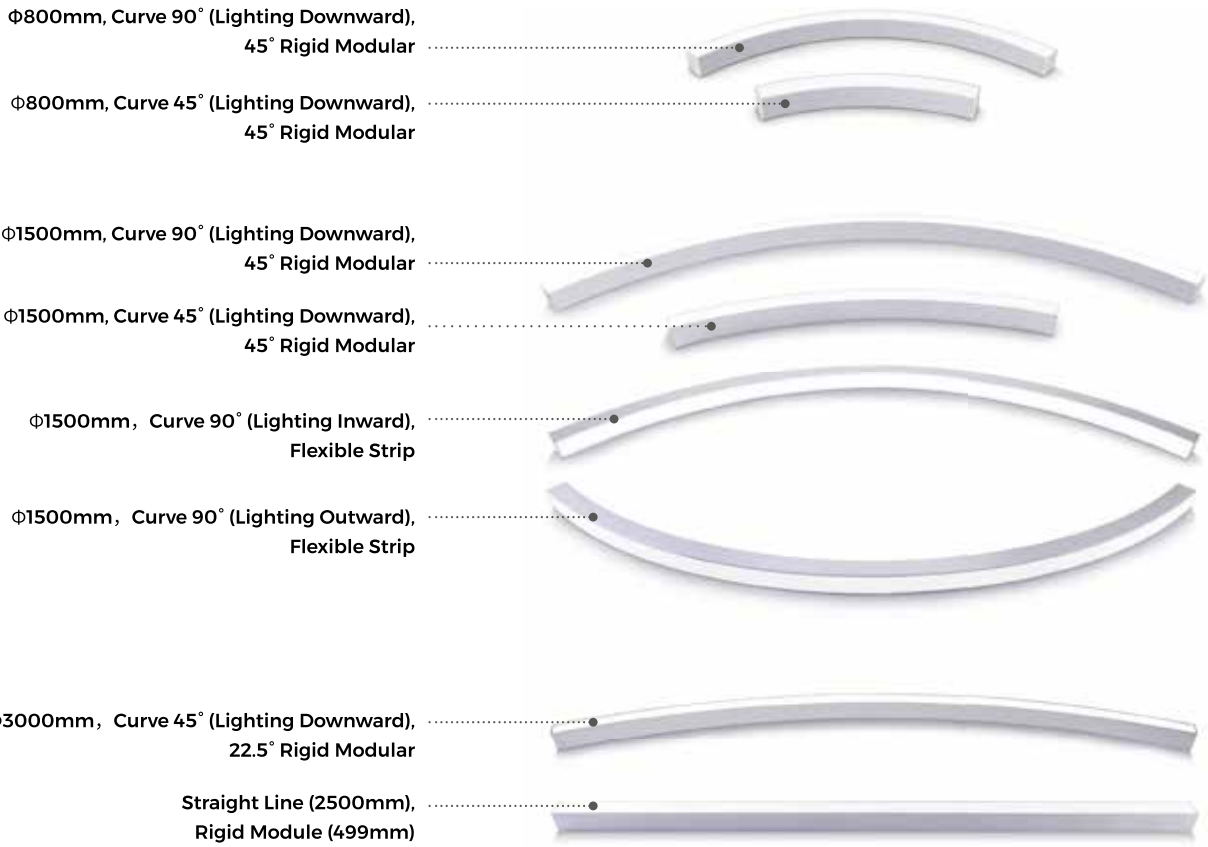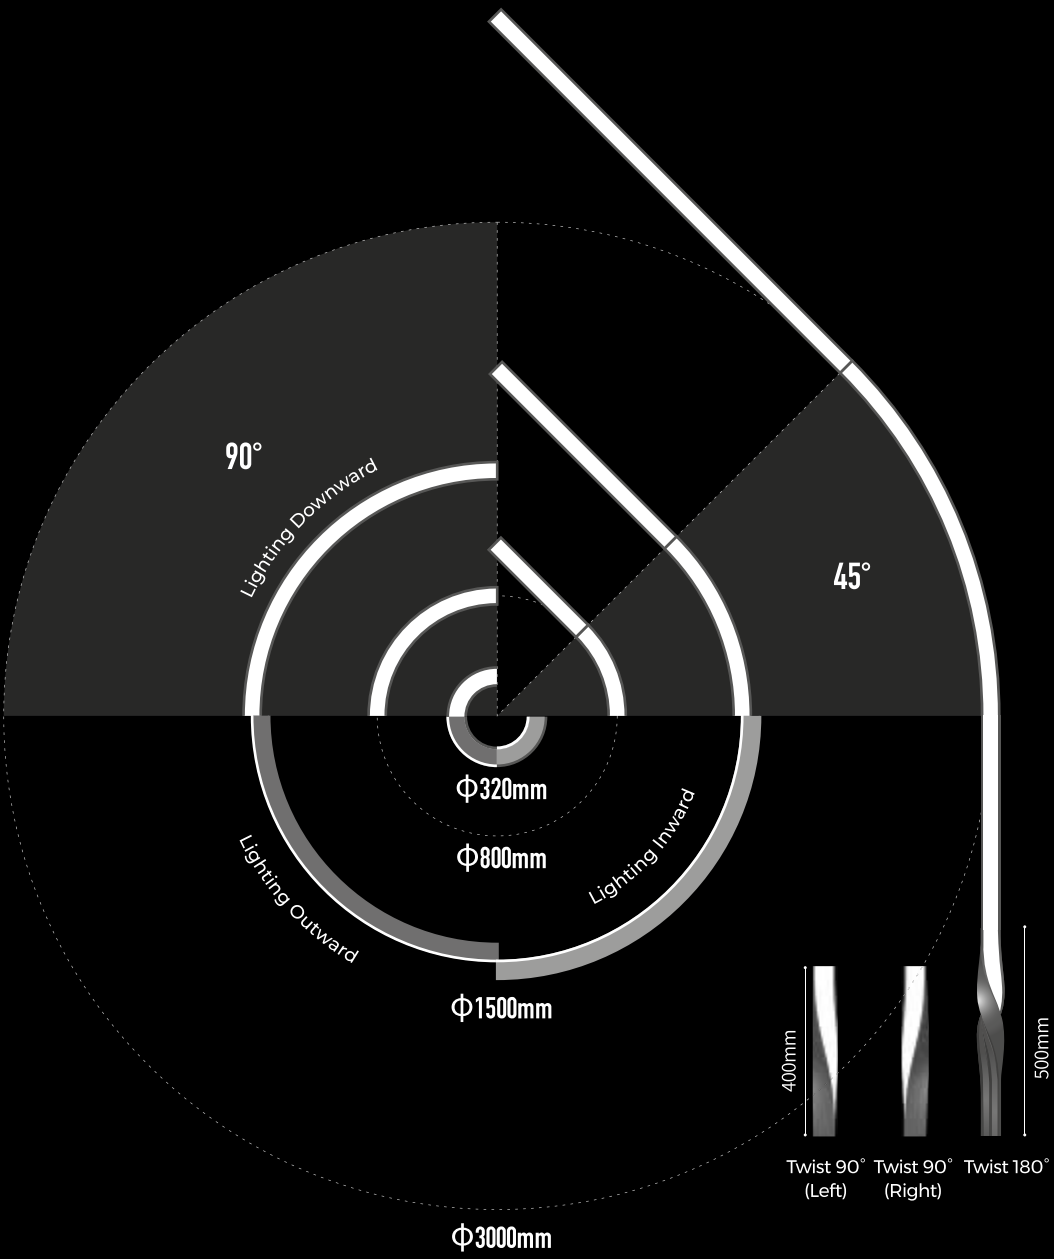

NEW

Basic Modules

LX-PL-AH5060 Series

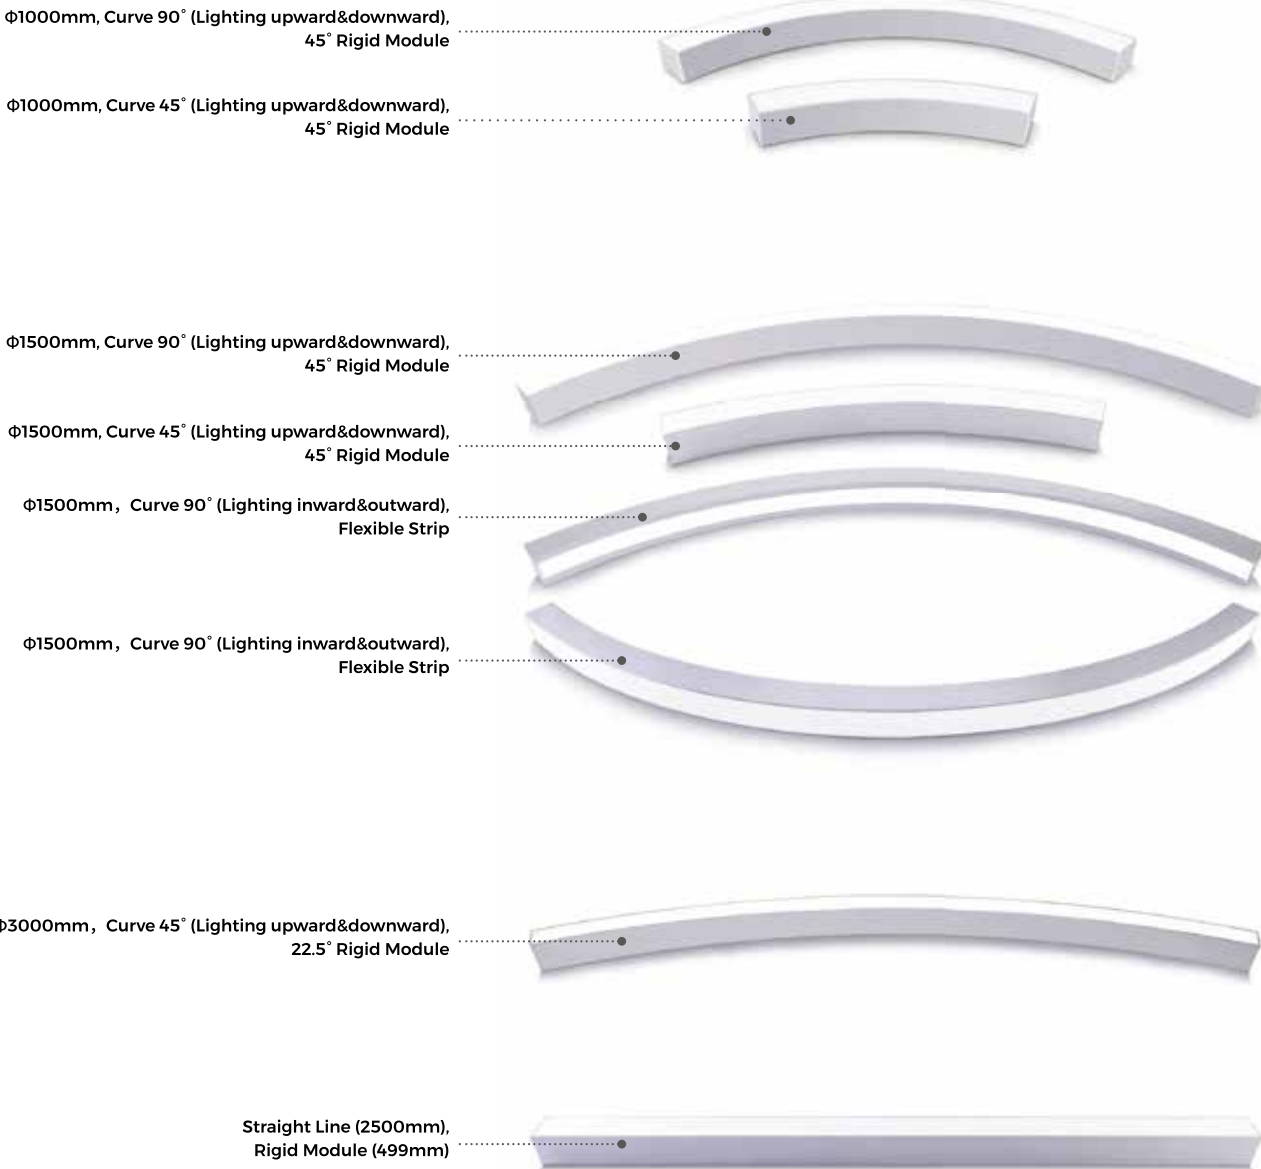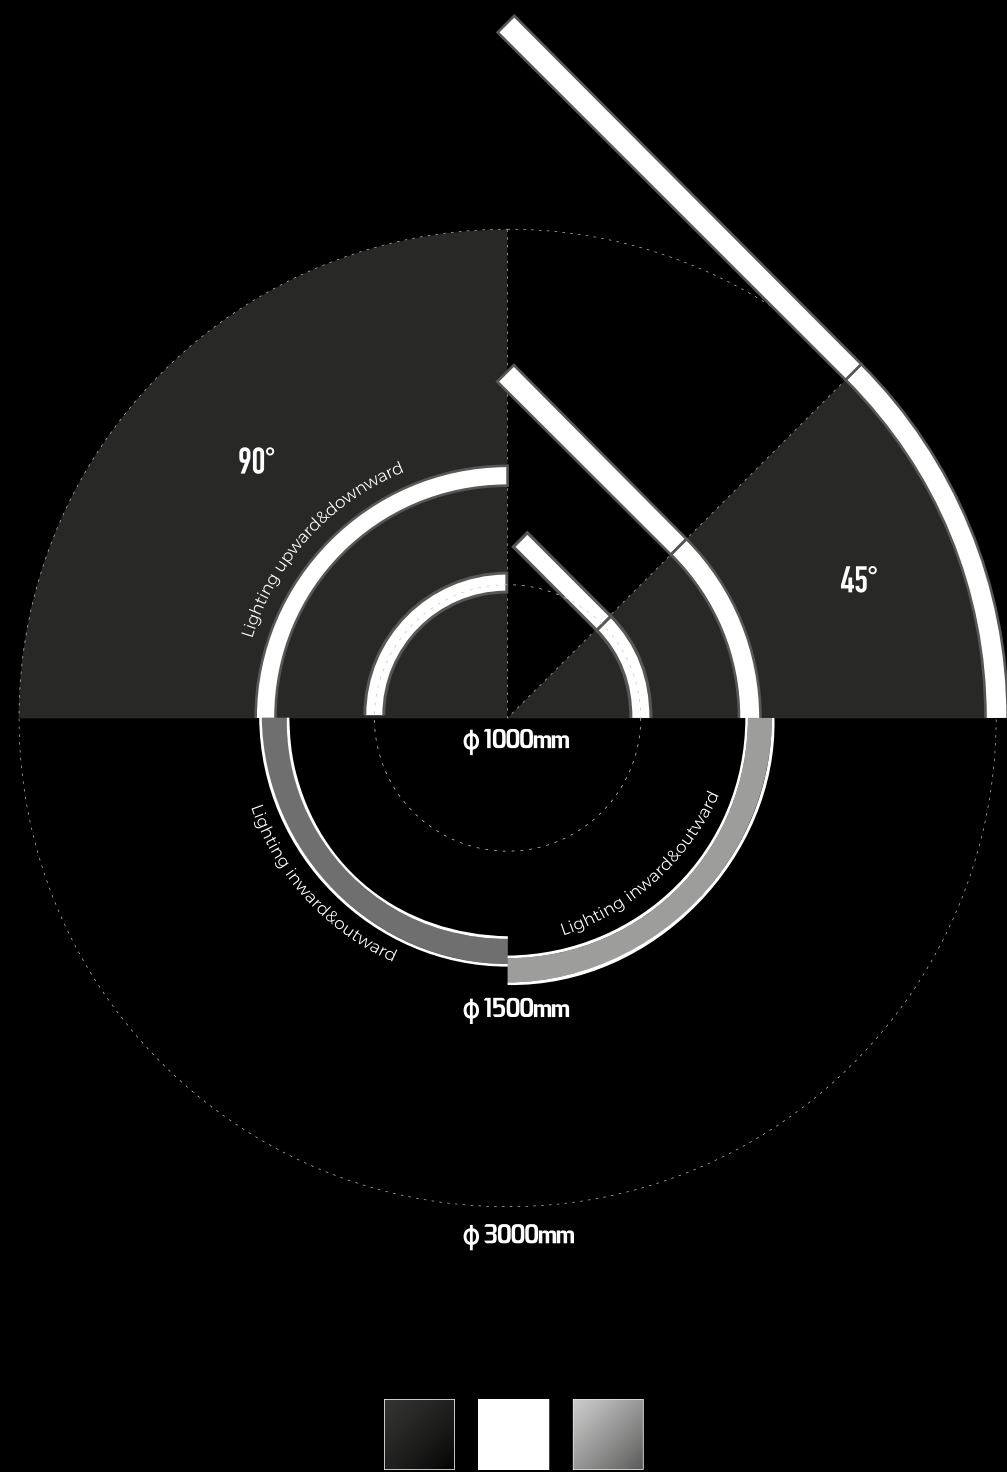


AS ENTHUSIASTIC AS THE DANCE

Interconnected Use

The straight lines in different lengths and curves with different radii can be combined and interconnected freely, they can be interconnected and extended on the ceiling for varieties of styles, or interconnected in vertical or horizontal space for pendant, or used freely in the 3D space along the edge of ceiling, wall and floor.

Limitless extension on the ceiling

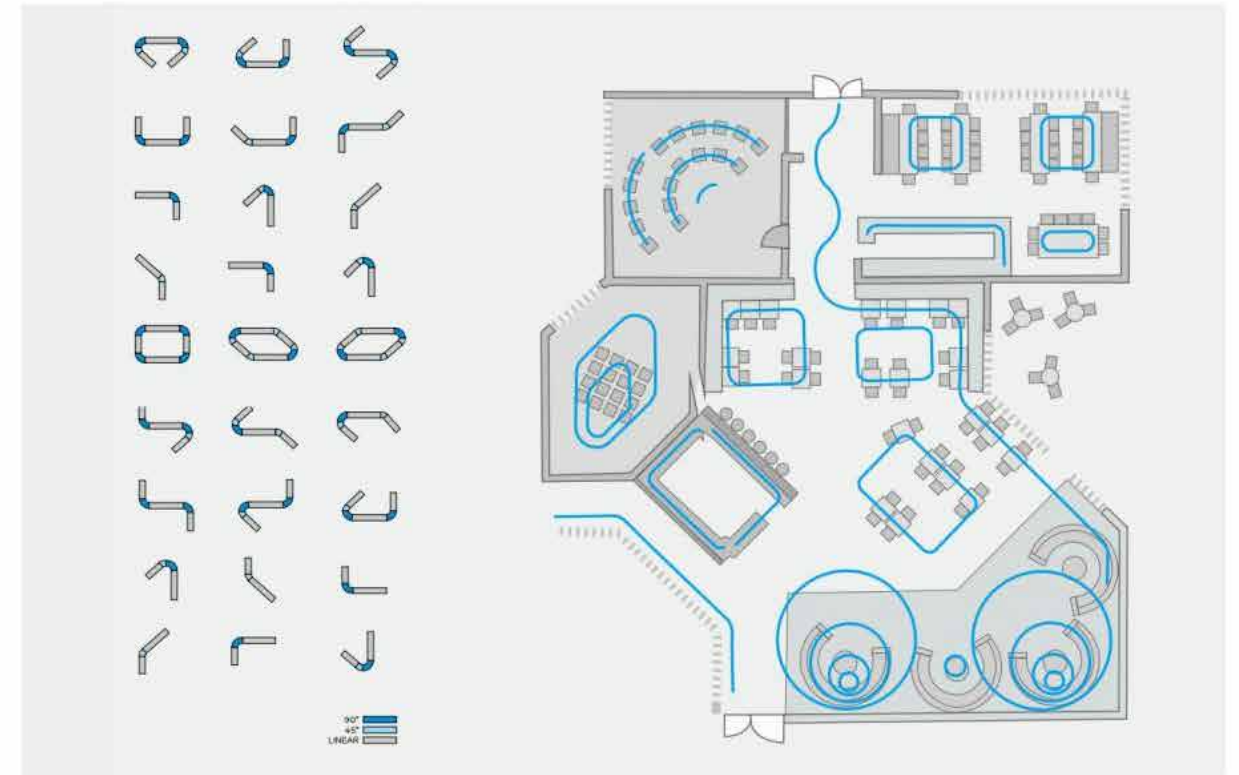

IP20

Silver

Black

White

24.5mm

35mm

320mm

390mm

90°

35mm

Rigid modular

LX-ST-DYB140-24V20mm
+03A90

Profilex1

Diffuserx1

End capx2

IP20

Silver

Black

White

24.5mm

35mm

320mm

390mm

90°

35mm

Rigid modular

LX-ST-DTB140-24V-20mm

Profilex1

Diffuserx1

End capx2

IP20

Silver

Black

White

24.5mm

35mm

320mm

390mm

90°

35mm

Rigid modular

LX-ST-DTB140-24V-20mm

Profilex1

Diffuserx1


End capx2



	LX-PL-AS3535-03A90
⚡	5.4W/m
🔌	24V
💡	810Lm/m
👤	48LEDs
Ra	>80

	LX-PL-AS3535-03N90
⚡	19.2W/m
🔌	24V
💡	2880Lm/m
👤	160LEDs
Ra	>80

	LX-PL-AS3535-03W90
⚡	19.2W/m
🔌	24V
💡	2880Lm/m
👤	160LEDs
Ra	>80

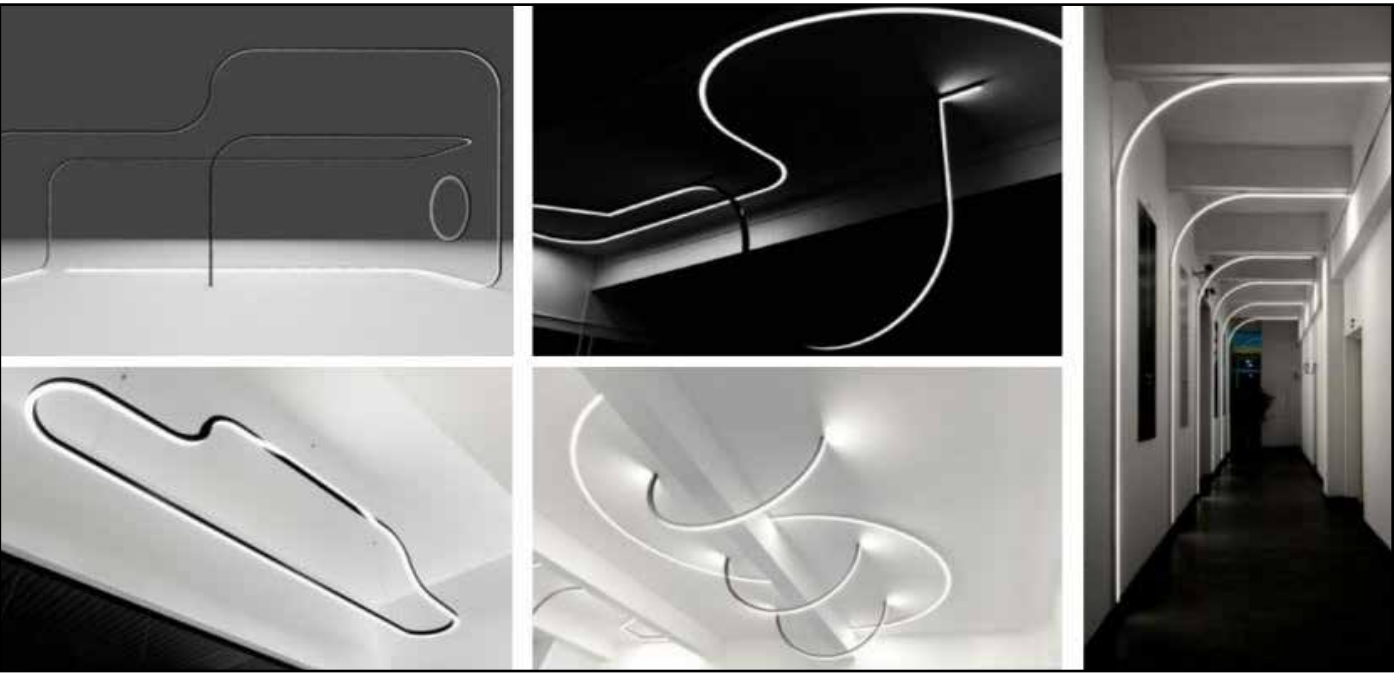

IP20

Silver

Black

White

24.5mm

35mm

320mm

390mm

90°

35mm

Rigid modular

LX-ST-DTB140-24V-20mm

Profilex1

Diffuserx1

End capx2

IP20

Silver

Black

White

24.5mm

35mm

320mm

390mm

90°

35mm

Rigid modular

LX-ST-DTB140-24V-20mm

Profilex1

Diffuserx1

End capx2

IP20

Silver

Black

White

24.5mm

35mm

320mm

390mm

90°

35mm

Rigid modular

LX-ST-DTB140-24V-20mm

Profilex1

Diffuserx1

End capx2

	LX-PL-AS3535-04T90L
⚡	19.2W/m
🔌	24V
💡	2880Lm/m
👤	160LEDs
Ra	>80

	LX-PL-AS3535-04T90R
⚡	19.2W/m
🔌	24V
💡	2880Lm/m
👤	160LEDs
Ra	>80

	LX-PL-AS3535-05T180
⚡	19.2W/m
🔌	24V
💡	2880Lm/m
👤	160LEDs
Ra	>80

IP20

Silver

Black

White

2500mm

24.5mm

35mm

Flexible Strip & Rigid modular

LX-ST-DT8140-24V-20mm

LX-ST-DY8140-24V-20mm

Profilex1

Diffuserx1

End capx2

IP20

Silver

Black

White

24.5mm

35mm

800mm

90°

45°

Rigid modular

LX-ST-DY8140-24V20mm-08A45

Profilex1

Diffuserx1

End capx2

IP20

Silver

Black

White

24.5mm

35mm

1500mm

90°

45°

Rigid modular

LX-ST-DY8140-24V-20mm-15A45

Profilex1

Diffuserx1

End capx2



	LX-PL-AS3535-2500
	19.2W/m
	24V
	2880Lm/m
	160LEDs
Ra	>80

	LX-PL-AS3535-08A45-90
	5.8W/Pcs
	24V
	870Lm/Pcs
	48LEDs
Ra	>80

	LX-PL-AS3535-15A45-90
	11.6W/Pcs
	24V
	1740Lm/Pcs
	96LEDs
Ra	>80



IP20

Silver

Black

White

24.5mm

35mm

3000mm

45°

Rigid modular

LX-ST-DY8140-24V-20mm-30A23

Profilex1

Diffuserx1

End capx2

	LX-PL-AS3535-30A45
	11.6W/Pcs
	24V
	1740Lm/Pcs
	96LEDs
Ra	>80

IP20

Silver

Black

White

24.5mm

35mm

1442mm

1512mm

90°

Rigid modular

LX-ST-DT8140-24V-20mm

Profilex1

Diffuserx1

End capx2

	LX-PL-AS3535-15N90
	19.2W/m
	24V
	2880Lm/m
	160LEDs
Ra	>80

IP20

Silver

Black

White

24.5mm

35mm

1468mm

1558mm

90°

Rigid modular

LX-ST-DT8140-24V-20mm

Profilex1

Diffuserx1

End capx2

	LX-PL-AS3535-15W90
	19.2W/m
	24V
	2880Lm/m
	160LEDs
Ra	>80

IP20



50mm

29mm

40mm

60mm

90°

45°

50mm

1000mm

Rigid modular

LX-ST-DYB140-24V-20mm-10A4S

Profile

50 Diffuser

30 Diffuser

End cap+2

IP20



50mm

29mm

40mm

60mm

90°

45°

50mm

1500mm

Rigid modular

LX-ST-DYB140-24V-20mm-15A4S

Profile

50 Diffuser

30 Diffuser

End cap+2

IP20



50mm

29mm

40mm

60mm

45°

50mm

3000mm

Rigid modular

LX-ST-DYB140-24V-20mm-30A23

Profile

50 Diffuser

30 Diffuser

End cap+2


	LX-PL-AH5060-10A45-90
	7.5W/Pcs
	24V
	820Lm/Pcs
	56LEDs
Ra	>80

	LX-PL-AH5060-15A45-90
	11.6W/Pcs
	24V
	1125Lm/Pcs
	84LEDs
Ra	>80

	LX-PL-AH5060-30A45
	11.6W/Pcs
	24V
	1750Lm/Pcs
	86LEDs
Ra	>80



IP20



50mm

29mm

40mm

60mm

90°

45°

50mm

1500mm

Rigid modular

LX-ST-DYB140-24V-20mm

Profile

50 Diffuser

30 Diffuser

End cap+2

	LX-PL-AH5060-2500
	19.2W/m
	24V
	2880Lm/m
	160LEDs
Ra	>80

IP20



50mm

29mm

40mm

60mm

90°

1432mm

1552mm

Rigid modular

LX-ST-DYB140-24V-20mm

Profile

50 Diffuser

30 Diffuser

End cap+2

	LX-PL-AH5060-15N90
	19.2W/m
	24V
	2880Lm/m
	160LEDs
Ra	>80

IP20



50mm

29mm

40mm

60mm

90°

1447mm

1567mm

Rigid modular

LX-ST-DYB140-24V-20mm

Profile


50 Diffuser

30 Diffuser

End cap+2

	LX-PL-AH5060-15W90
	19.2W/m
	24V
	2880Lm/m
	160LEDs
Ra	>80



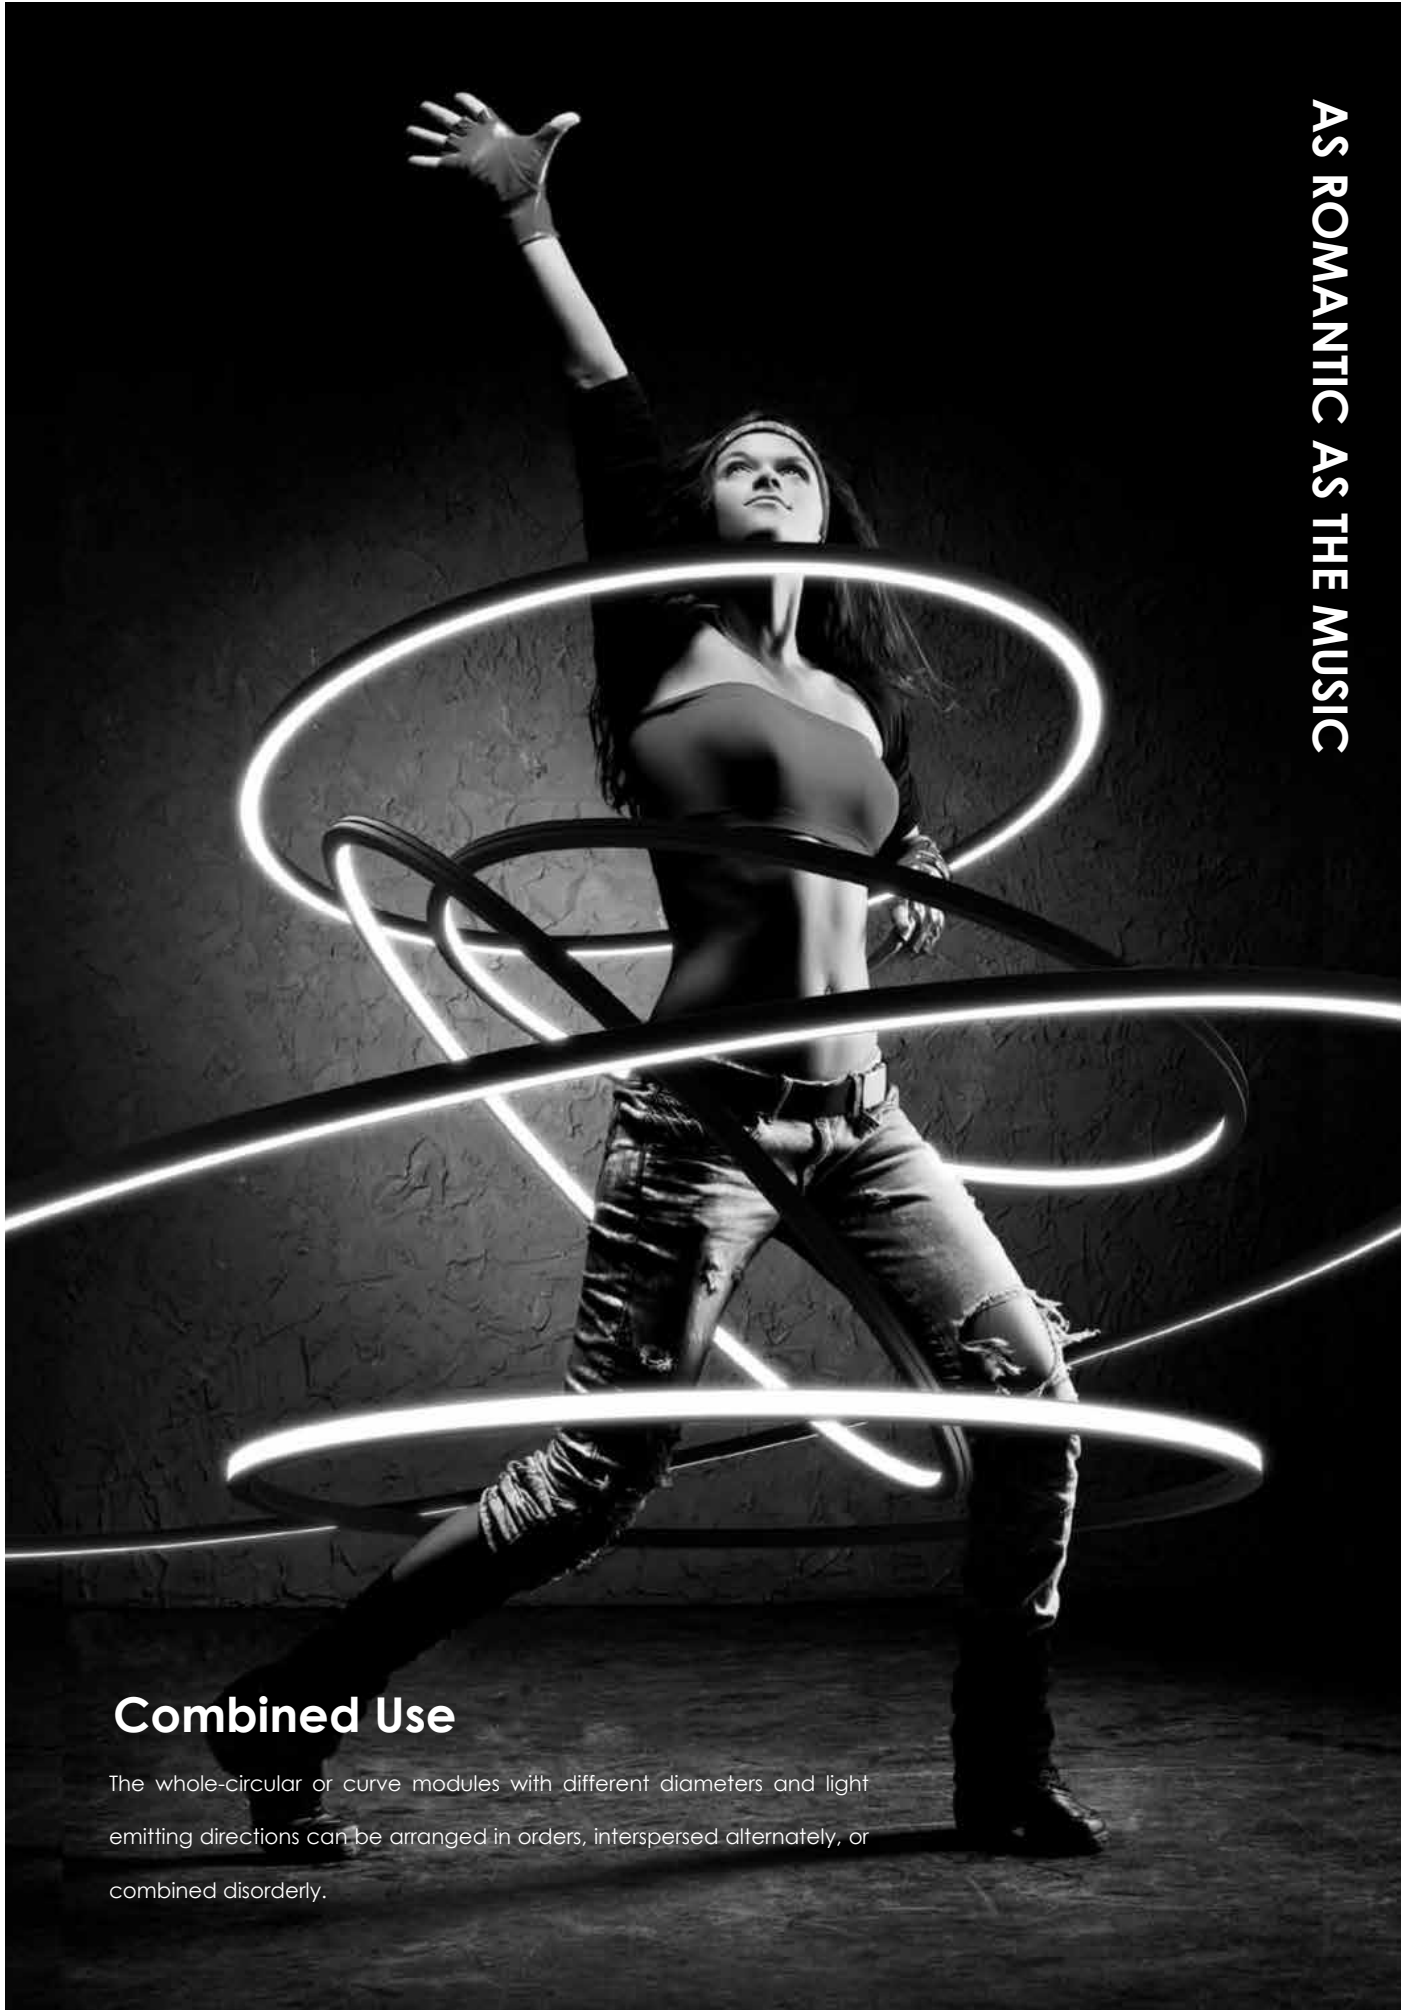

AS ROMANTIC AS THE MUSIC

Combined Use

The whole-circular or curve modules with different diameters and light emitting directions can be arranged in orders, interspersed alternately, or combined disorderly.

835mm
32.87"

765mm
30.12"

1535mm
60.43"

1465mm
57.68"



1512mm
59.53"

1442mm
56.77"

1558mm
61.34"

1488mm
58.58"

	LX-PL-AS3535-08A360
	50W
	220-240VAC 50Hz/60Hz
	1630 Lm
Ra	>80/>95
	120°
	Silicone

	LX-PL-AS3535-15A360
	90W
	220-240VAC 50Hz/60Hz
	2850 Lm
Ra	>80/>95
	120°
	Silicone

	LX-PL-AS3535-15N360
	105W
	220-240VAC 50Hz/60Hz
	2200 Lm
Ra	>80/>95
	120°
	Silicone

	LX-PL-AS3535-15W360
	105W
	220-240VAC 50Hz/60Hz
	2870 Lm
Ra	>80/>95
	120°
	Silicone

AS RESTRAINING AS THE POEM



Single Luminaire Use

The basic modules can constitute standard luminaires with the diameter of 0.8m/1.5m/3.0m for independent application. Multiple light emitting directions are optional: lighting downward, lighting outward and lighting inward. The light emitting modes are optional according to the scenes as well, so as to create different atmospheres. There are also multiple mounting methods optional: pendant, recessed, surface mounted and wall mounted, which are all perfectly compatible to the spatial structures of different areas different rigidity and different materials.

Pendant



Pendant (Lighting Downward)



Pendant (Lighting Upward)



Pendant (Lighting Outward)



Pendant (Lighting Inward)



Pendant (Lighting Outward)



Pendant (Lighting Inward)



Surface mounted & Recessed



Recessed





Surface mounted (Lighting Downward)



Surface mounted (Lighting Outward)




Surface mounted (Lighting Inward)

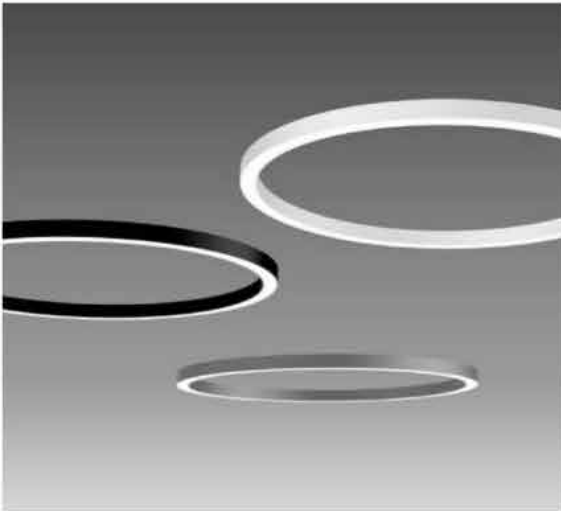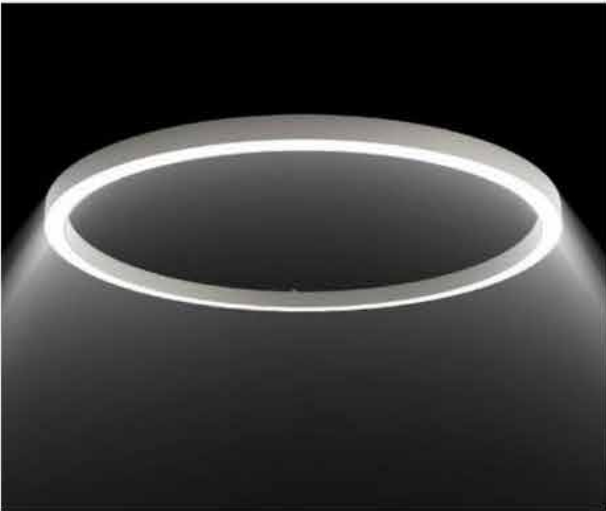


Wall mounted & Mounted away from the wall



Wall mounted (Lighting Downward)




Wall mounted (Lighting Outward)




Wall mounted (Lighting Inward)




Mounted away form the wall (Indirect illumination)

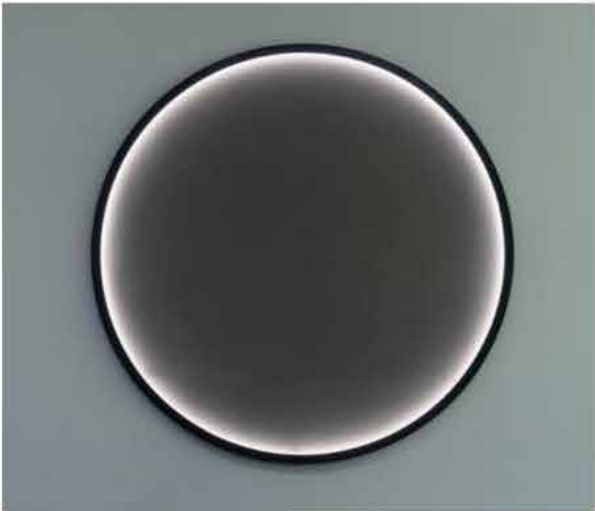

Crossed Combination

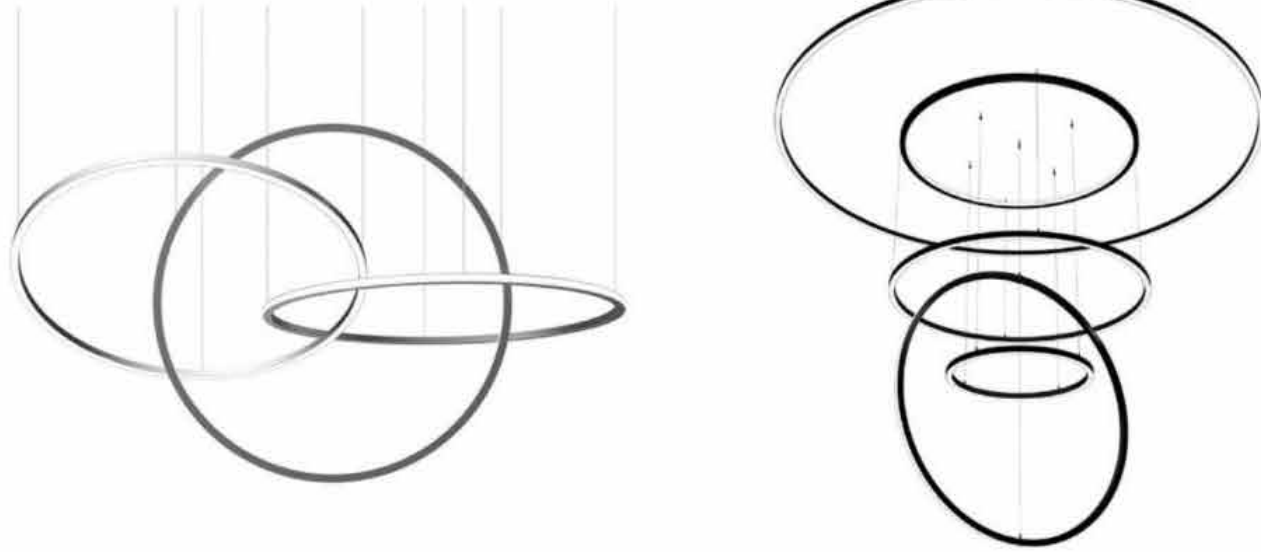


Disorderly Arrangement



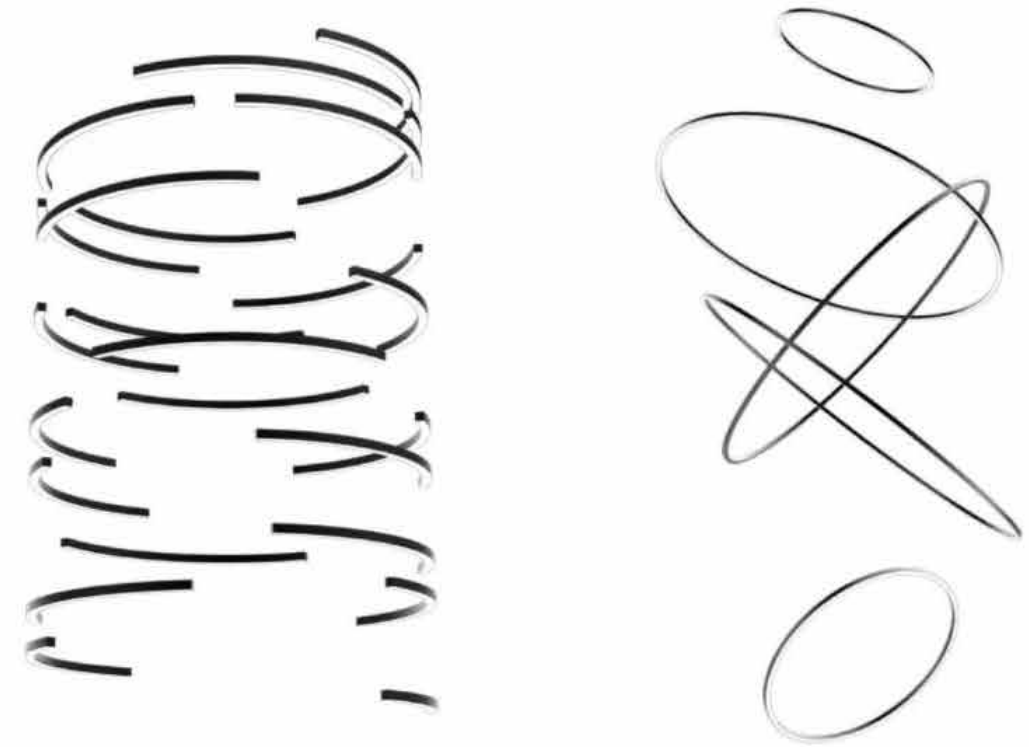


IP20



	LX-NF-SKY06A	LX-NF-SKY06B	LX-NF-SKY06D	LX-NF-SKY12C	LX-NF-SKY20C
	13.5W/m	10W/m	10.6W/m	8.7W/m	8.7W/m
	1320Lm/m	1000Lm/m	1100Lm/m	890Lm/m	890Lm/m
	DC24V 50/60Hz				
	2700K/3000K/4000K/6000K				
	>80 / >90				
	6000mm		12000mm	20000mm	

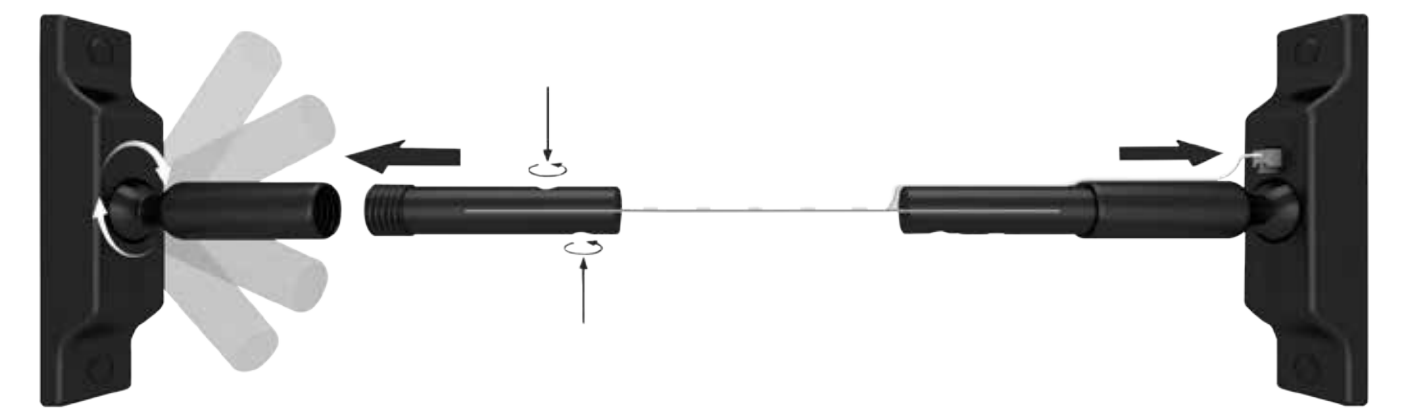

	LX-NF-SKY06A		SKY-06B 6M	 10°	 1000	 DC 24V
	LX-NF-SKY06B		SKY-06D 6M	 10.6°	 1100	 AC/DC 24V
	LX-NF-SKY06D		SKY-06A 6M	 13.5°	 1320	 DC 24V
	LX-NF-SKY12C		SKY-12C 12M	 8.7°	 890	 DC 24V
	LX-NF-SKY20C		SKY-20C 20M			



*Luxio the art of combining
luxury and light*

Z.Ain Attig N°9 - Province Skhirat - Temara
Tel : +212 5 37 74 99 16
Fax : +212 5 37 74 99 18
Email : info@luxio-lighting.com
Site : www.luxio-lighting.com