

INGROUND

LX-IG-2308



IP
67

DC24-36V



INGROUND

High power LED underground light, fashionable and beautiful appearance. The light body uses the design of increasing heat dissipation space, the buried barrel adopts aluminium alloy compression moulding forming. Surface with anodizing treatment has the stronger structure and anti-corrosion capability, that its thermal conductivity is 200 times higher than the normal project plastic's, meet the LED light body requirement for heat conduct to the outside of concrete and land, fully ensure the stability and long lifespan of LED fixture.

Stainless steel faceplate, high pressure die casting light body, surface with electrostatic plastic coating. Lampshade adopts high strength toughened glass, resist the impact and friction.

Adopt American CREE original LED light source, high flux output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.

Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

Ambient Temperature -25°~50°C / Ambient Humidity 10%~90%



luxio
L I G H T I N G

www.luxio-lighting.com


References

Reference	Led Power	Led Quantity	Input Voltage	Luminous flux	CCT/K	Controle Mode	OPTICS	IP Rating	Dimensions										
LX-IG-2308-48	11W	48pcs	DC24V	605lm	2700K/3000K 4000K/6000K	DMX512 /CC	>120°	IP67	L1000*H50* W86.5mm										
				462lm	RGB														
LX-IG-2308A-9 (0.5m)	11W	9pcs	DC24V	715lm	2700K/3000K 4000K/6000K		DMX512 /CC		8°/12.5°/20°/30°/60°/ 15°X30°/10°X60°	IP67	L500*H50* W86.5mm								
				440lm	RGB														
LX-IG-2308A-18	21W	18pcs	DC24-36V	1365lm	2700K/3000K 4000K/6000K				DMX512 /CC		(Tiled 10 degrees :15°/30° /45°/20°*35°)	IP67	L1000*H50* W86.5mm						
				840lm	RGB														
LX-IG-2308A-24	28W	24pcs	DC24-36V	1820lm	2700K/3000K 4000K/6000K						DMX512 /CC			(Tiled 10 degrees :15°/30° /45°/20°*35°)	IP67	L1000*H50* W86.5mm			
				1120lm	RGB														
LX-IG-2308A-36	42W	36pcs	DC24V	2730lm	2700K/3000K 4000K/6000K									DMX512 /CC			(Tiled 10 degrees :15°/30° /45°/20°*35°)	IP67	L1000*H50* W86.5mm
				1680lm	RGB														

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

OPTICS

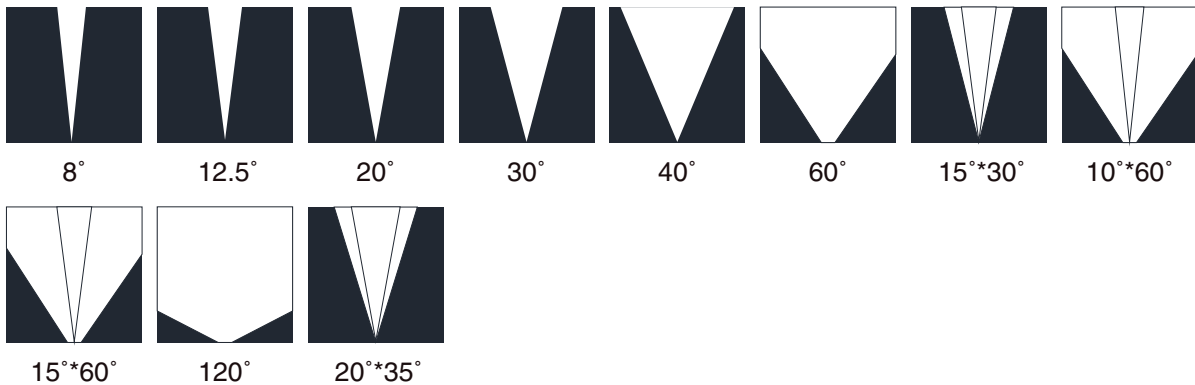

Dimensions

