

PROFIL LIGHT




LX-PL-AH5060-10A45-90

DC24V	CRI	IP
	>80	20



PROFIL LIGHT LX-PL-AH5060-10A45-90

- Φ 1m 45°/90° arc (up-down double lighting), thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, surface mounted

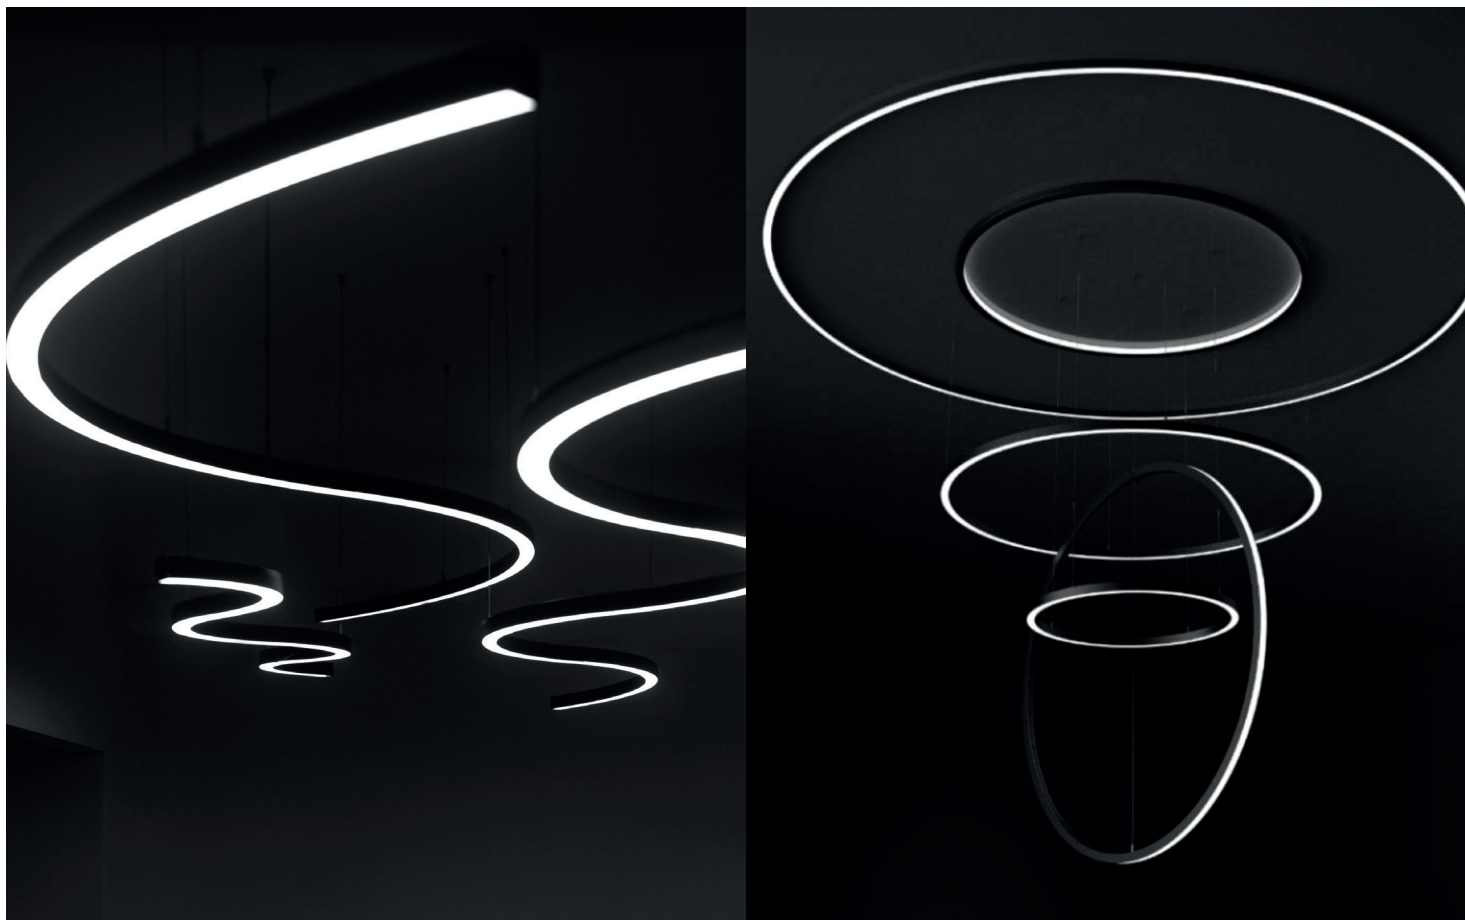

luxio
L I G H T I N G

www.luxio-lighting.com

References

Reference	Led Power	Input Voltage	Luminous flux	LEDs	CCT/K	Dimensions
LX-PL-AH5060-10A45-90	7.5W/Pcs 45°	AC24V	1125Lm/Pcs	64 LEDs	1900K/2300K/2700K/3000K/ 4000K/5000K/6000K	H60xW50xL1000mm

Optional Accessories



Profile



50 diffuser



30 diffuser



End capx2

Installation Accessories



Profile & Carrierx1



Canopy



Screw set



Clips




Reflective paper





Connector

Fixings



Dimensions

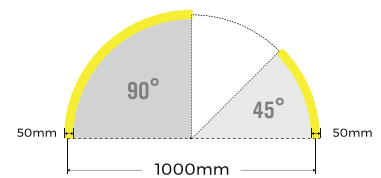

LX-ST-DY8140-24V-20mm-10A45

