

# PROFIL LIGHT




LX-PL-AH5060-2500

DC24V	CRI	IP
	>80	20



## PROFIL LIGHT LX-PL-AH5060-2500

- 2500m straight line( up-down double lighting), thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, surface mounted

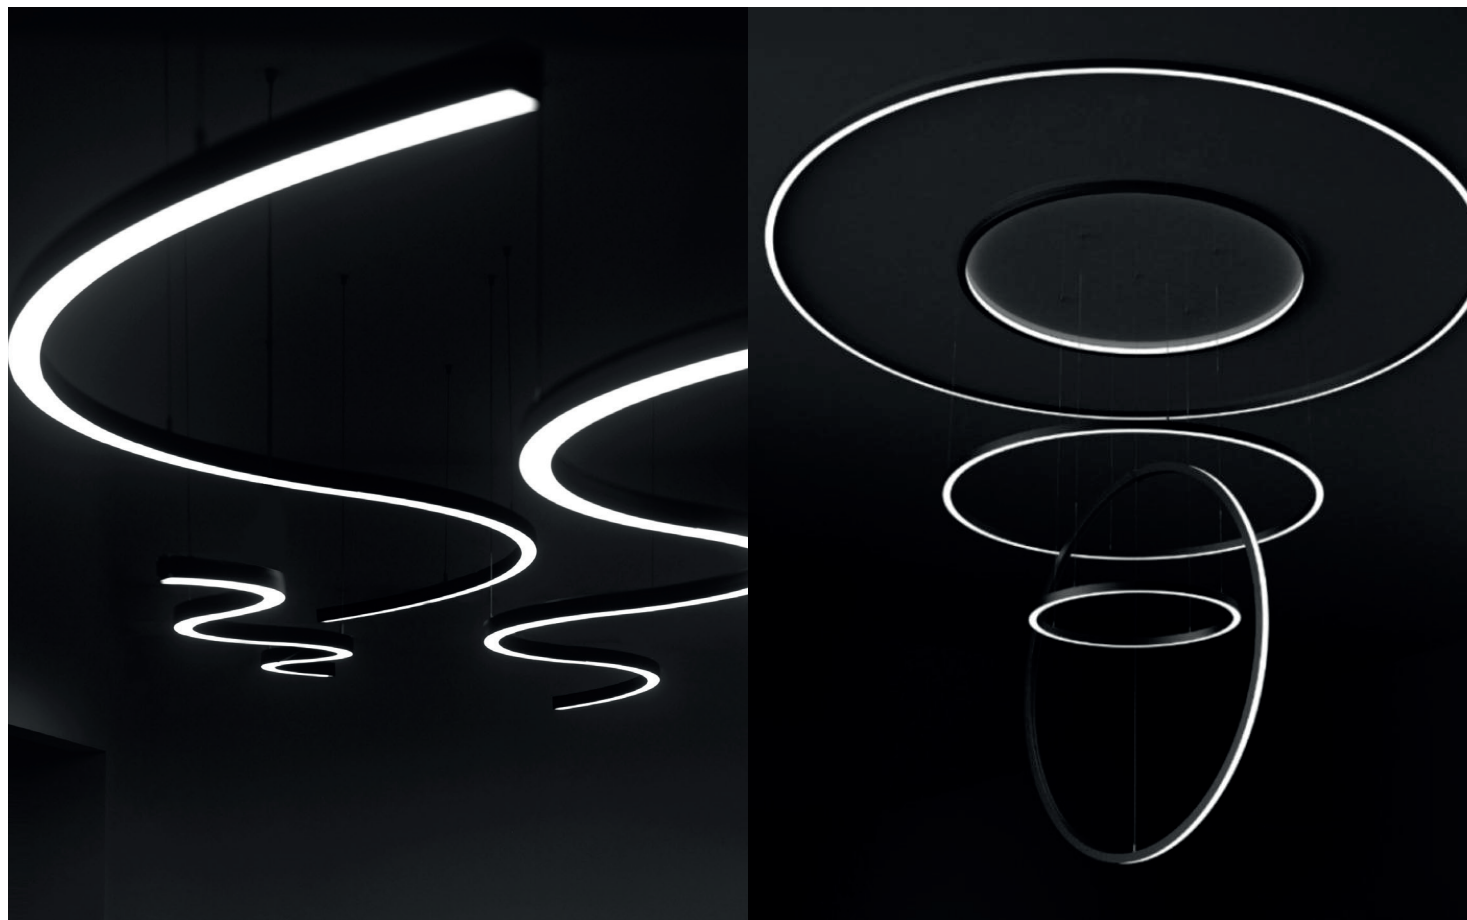

**luxio**  
L I G H T I N G

[www.luxio-lighting.com](http://www.luxio-lighting.com)

## References

Reference	Led Power	Input Voltage	Luminous flux	LEDs	CCT/K	Dimensions
LX-PL-AH5060-2500	9.6W/Pcs	AC24V	1060Lm/Pcs	70 LEDs	1900K/2300K/2700K/3000K/ 4000K/5000K/6000K	H60xW50xL2500mm
	19.2W/m		2880Lm/m	160 LEDs		

## Optional Accessories



Profile



50 diffuser



30 diffuser



End capx2

## Installation Accessories



Profile & Carrierx1



Screw set



Clips




Reflector paper




Connector

## Fixings



## Dimensions

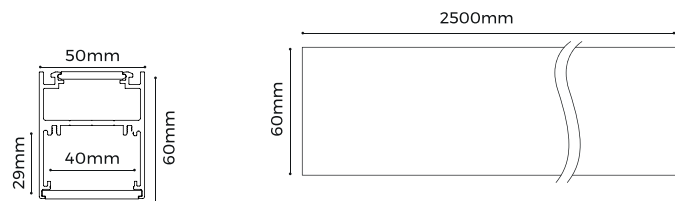

LX-ST-DT8140-24V-20mm / 5000x20x1.5mm



LX-ST-DY8140-24V-20mm / 499x20x5.8mm

