

# PROFIL LIGHT

LX-PL-AS3535-03W90

DC24V	CRI	IP
	>80	20



## PROFIL LIGHT LX-PL-AS3535-03W90

- $\varnothing 0.32M$  90° arc (lighting outward), thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant and surface mounted




**luxio**  
L I G H T I N G

[www.luxio-lighting.com](http://www.luxio-lighting.com)

## References

Reference	Led Power	Input Voltage	Luminous flux	LEDs	CCT/K	Dimensions
LX-PL-AS3535-03W90	19.2W/m	AC24V	2880Lm/m	160 LEDs	1900K/2300K/2700K/3000K/4000K/5000K/6000K	(H35xW35)x(L320/360mm)

## Optional Accessories

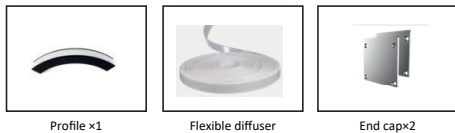


Profile x1

Flexible diffuser

End cap x2

## Installation Accessories

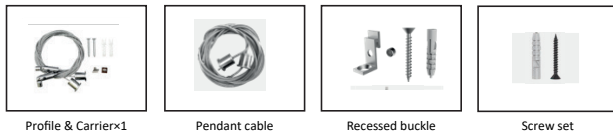


Profile & Carrier x1

Pendant cable


Recessed buckle

Screw set

## Fixings



## Dimensions

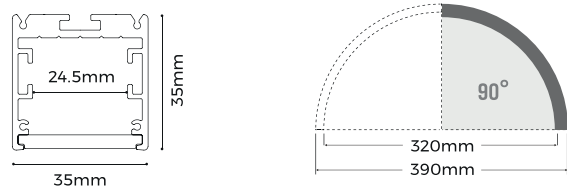

LX-ST-DT8140-24V-20mm

