

PROFIL LIGHT


LX-PL-AS3535-05T180

| | | |
|-------|-----|----|
| DC24V | CRI | IP |
| | >80 | 20 |



PROFIL LIGHT LX-PL-AS3535-05T180

- 0.5M twist 180°, thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, recessed and surface mounted

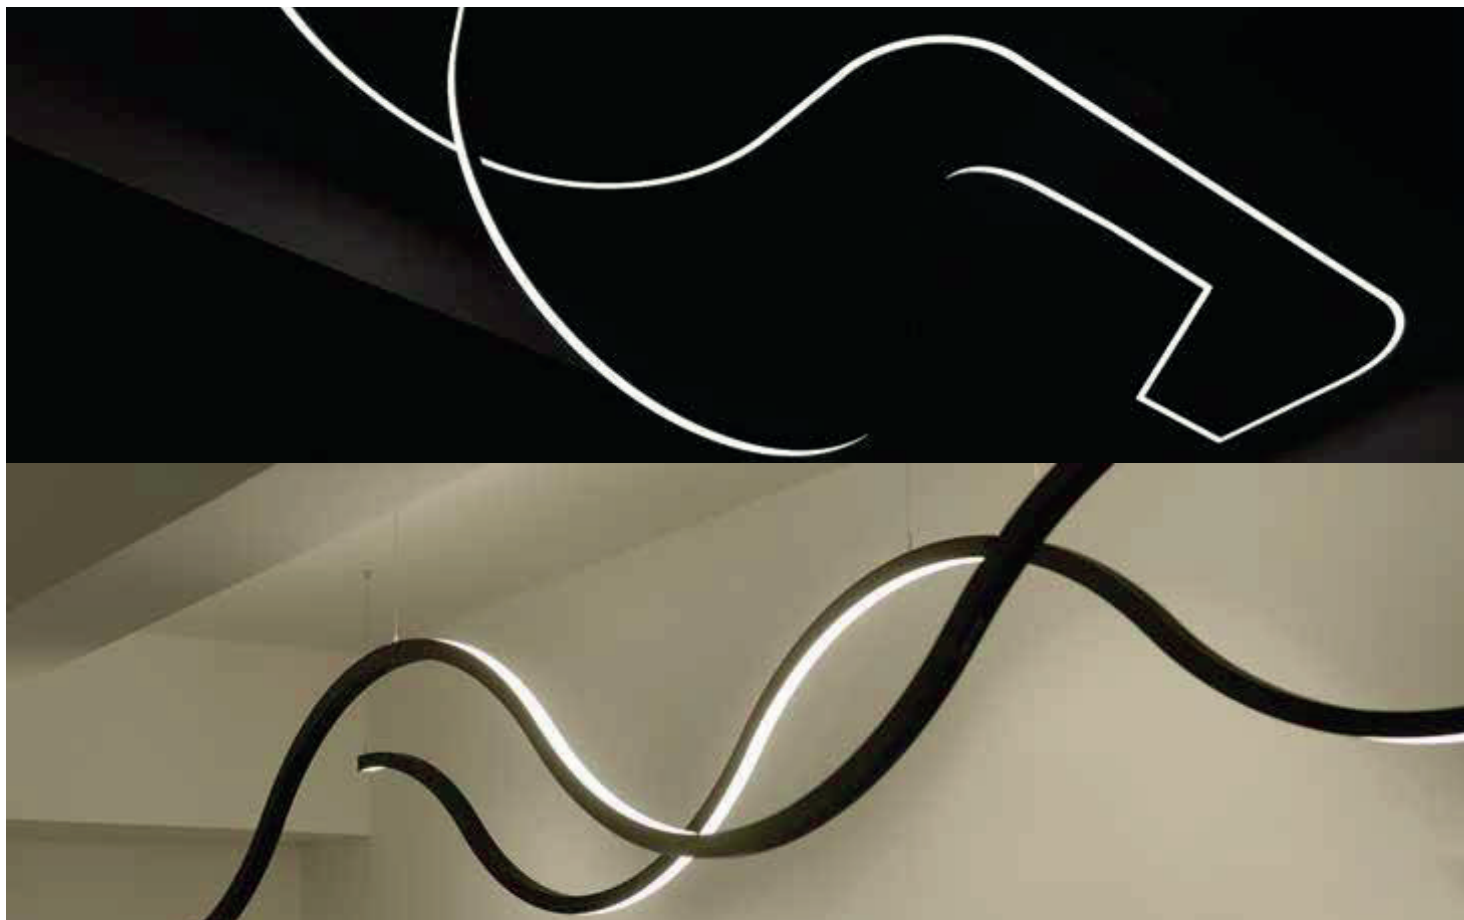

References

| Reference | Led Power | Input Voltage | Luminous flux | LEDs | CCT/K | Dimensions |
|---------------------|-----------|---------------|---------------|----------|---|----------------|
| LX-PL-AS3535-05T180 | 19.2W/m | AC24V | 2880lm/m | 160 LEDs | 1900K/2300K/2700K/3000K/ 4000K/5000K/6000K | H35xW35xL500mm |

Optional Accessories



Profile x1



Flexible diffuser



End cap x2

Installation Accessories



Profile & Carrier x1





Pendant cable

Fixings



Dimensions

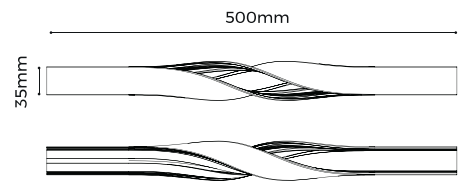

LX-ST-DT8140-24V-20mm

