

PROFIL LIGHT

LX-PL-AS3535-08A45-90

DC24V	CRI	IP
	>80	20



PROFIL LIGHT LX-PL-AS3535-08A45-90

- \varnothing 0.8m 45°/ 90°arc, thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, recessed and surface mounted



luxio
L I G H T I N G

www.luxio-lighting.com

References

Reference	Led Power	Input Voltage	Luminous flux	LEDs	CCT/K	Dimensions
LX-PL-AS3535-08A45-90	5.8W/Pcs	AC24V	870lm/Pcs	48 LEDs	1900K/2300K/2700K/3000K/ 4000K/5000K/6000K	H35xW35xL800mm

Optional Accessories



Profile x1



Flexible diffuser



End cap x2

Installation Accessories



Profile & Carrier x1



Pendant cable



Canopy




Surface buckle



Screw set




Recessed buckle





Connector

Fixings



Dimensions

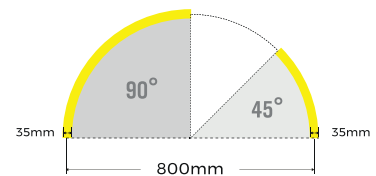

LX-ST-DY8140-24V-20mm-08A45



D800x45°x20x5.8mm