

PROFIL LIGHT



LX-PL-AS3535-15A45-90

DC24V	CRI	IP
	>80	20



PROFIL LIGHT LX-PL-AS3535-08A45-90

- ϕ 1.5m 45°/ 90°arc, thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, recessed and surface mounted



luxio
L I G H T I N G

www.luxio-lighting.com

References

Reference	Led Power	Input Voltage	Luminous flux	LEDs	CCT/K	Dimensions
LX-PL-AS3535-15A45-90	11.6W/Pcs	AC24V	1740Lm/Pcs	96 LEDs	1900K/2300K/2700K/3000K/ 4000K/5000K/6000K	H35xW35xL1500mm

Optional Accessories



Profile x1



Flexible diffuser



End cap x2

Installation Accessories



Profile & Carrier x1



Pendant cable



Canopy



Surface buckle



Screw set




Recessed buckle





Connector

Fixings



Dimensions

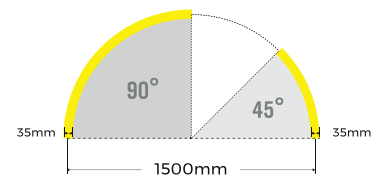

LX-ST-DY8140-24V-20mm-15A45



D1500x45°x20x5.8mm