

PROFIL LIGHT




LX-PL-AS3535-15N360

220-240VAC	CRI >80	PF >0.9	IP 20	CLASS II
------------	------------	------------	----------	----------



PROFIL LIGHT LX-PL-AS3535-15N360

- Φ 1.5M, circular luminaires of lighting inward
- High quality surface treatment, three colors including black, white and silver optional
- Adopt silicone flexible diffuser, producing uniform and soft light
- Two-in-one pendant cable, beautiful overall effect
- Two installation ways: pendant and surface mounted

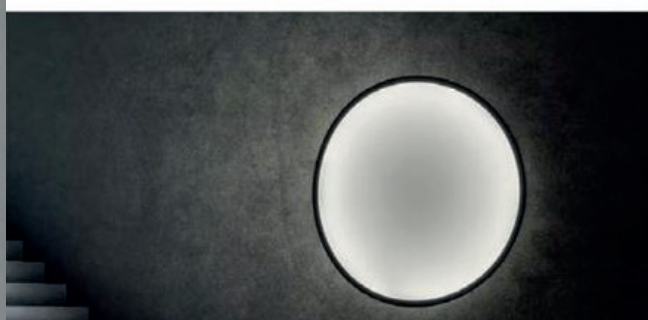


luxio
L I G H T I N G

www.luxio-lighting.com

References

Reference	Led Power	Input Voltage	Luminous flux	CCT/K	Beam angle	Dimensions
LX-PL-AS3535-15N360	105W	220-240VAC	2200lm	1900K/2300K/2700K/3000K/ 3500K/4000K/5000K/6000K	120°	1500mm, lighting outward 360° luminaires

Fixings



Dimensions

