

PROFIL LIGHT

LX-PL-AS3535-2500




DC24V	CRI	IP
	>80	20



PROFIL LIGHT LX-PL-AS3535-2500

- 2500m straight line, thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, recessed and surface mounted

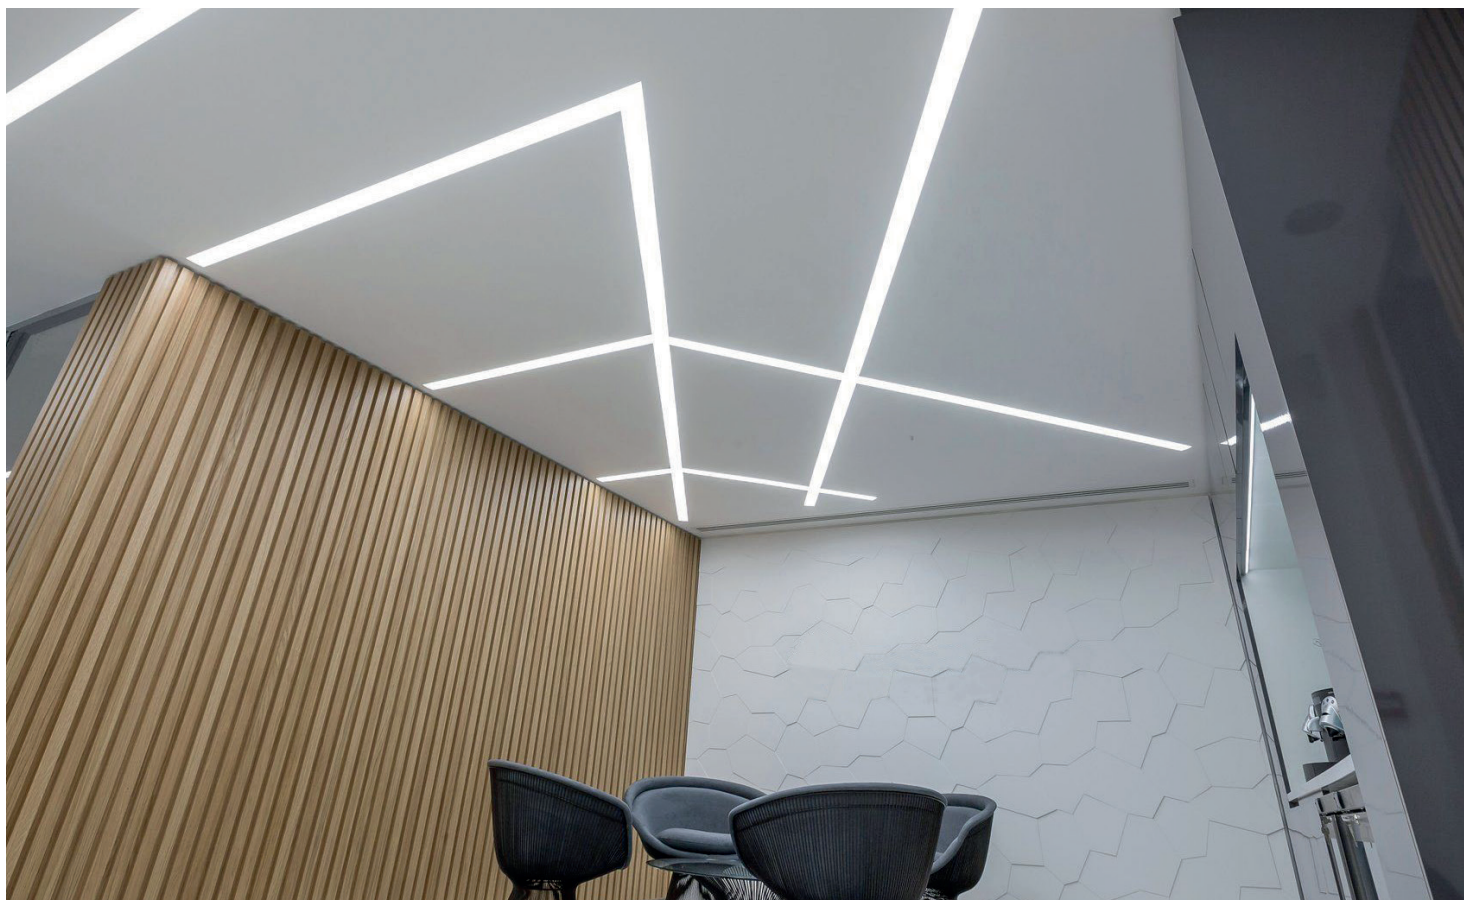

luxio
L I G H T I N G

www.luxio-lighting.com

References

Reference	Led Power	Input Voltage	Luminous flux	LEDs	CCT/K	Dimensions
LX-PL-AS3535-2500	19.2W/m	AC24V	2880Lm/m	160 LEDs	1900K/2300K/2700K/3000K/ 4000K/5000K/6000K	H35xW35xL2500mm

Optional Accessories



Profile x1



Flexible diffuser



End cap x2

Installation Accessories



Profile & Carrier x1



Pendant cable



Canopy




Surface buckle



Screw set




Recessed buckle





Connector

Fixings



Dimensions

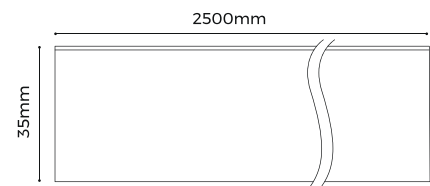

LX-ST-DT8140-24V-20mm / 5000x20x1.5mm

