

# PROFIL LIGHT


LX-PL-AS3535-30A45

DC24V	CRI	IP
	>80	20



## PROFIL LIGHT LX-PL-AS3535-30A45

- $\Phi$ 3m 45° arc, thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, recessed and surface mounted

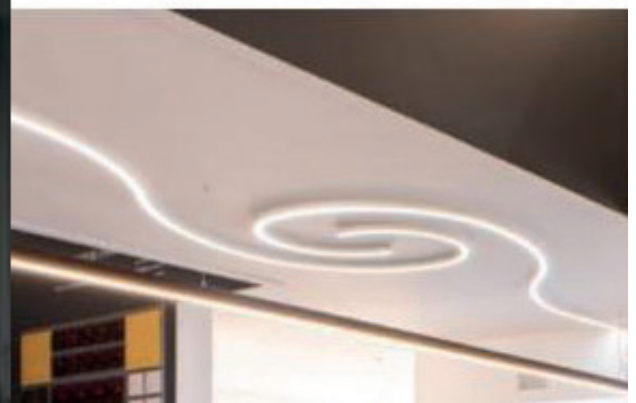

**luxio**  
L I G H T I N G

[www.luxio-lighting.com](http://www.luxio-lighting.com)

## References

Reference	Led Power	Input Voltage	Luminous flux	LEDs	CCT/K	Dimensions
LX-PL-AS3535-30A45	11.6W/Pcs	AC24V	1740Lm/Pcs	96 LEDs	1900K/2300K/2700K/3000K/ 4000K/5000K/6000K	H35xW35xL3000mm

## Optional Accessories



Profile x1



Flexible diffuser



End cap x2

## Installation Accessories



Profile & Carrier x1



Pendant cable



Canopy




Surface buckle



Screw set




Recessed buckle





Connector

## Fixings



## Dimensions

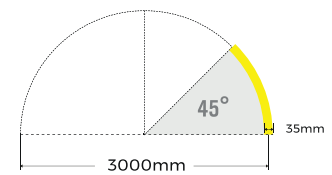

LX-ST-DY8140-24V-20mm-30A23



D3000x22.5°x20x5.8mm