


PROFIL LIGHT



LX-PL-LE1212

DC24V	CRI	IP
	90	20

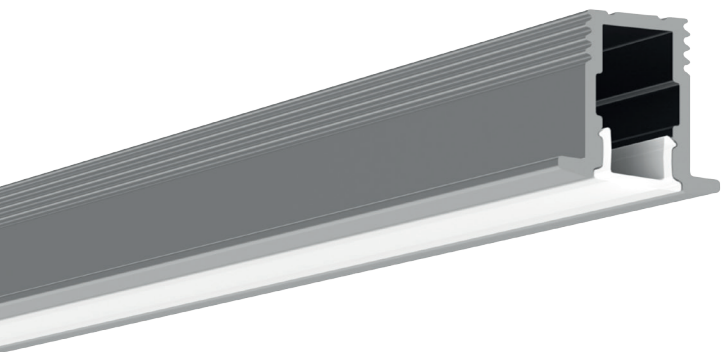

PROFIL LIGHT LE1212


- Super narrow, applicable to a variety of small spaces
- "Dot-free" lighting source perfectly producing homogeneous & soft lighting
- AL6063-T5 aluminum profile with excellent heat dissipation performance
- PC diffuser imported from Germany
- Close-fitting design without screws, optional end caps with or without holes




References

Reference	Led Power	Luminous flux	LEDs	CCT/K	Dimensions
LX-PL-LE1212	6.6W/m	710Lm/m	140 LEDs	1900K/2300K/2700K/3000K/4000K/5000K/6000K	H12xW12xL2500mm


Structure image

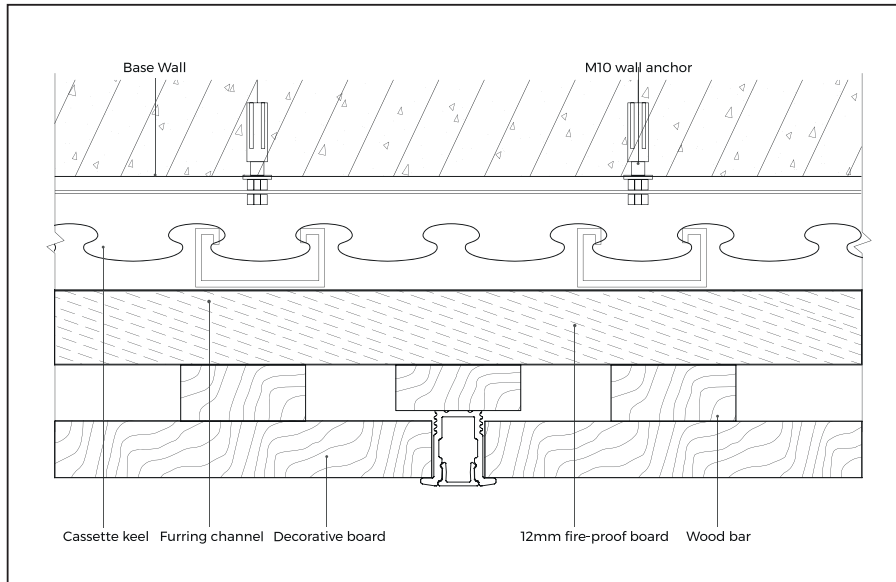

Structure image

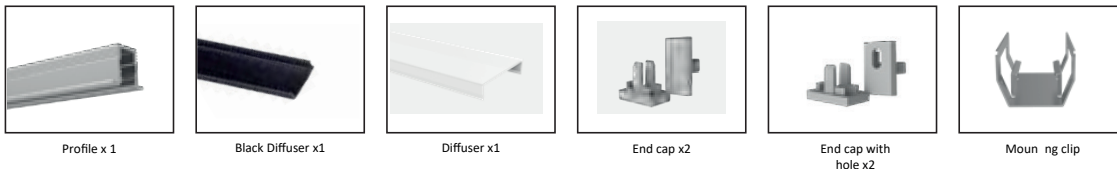

Fixings



Dimensions

