


# PROFIL LIGHT



LX-PL-LE2409

DC24V	CRI >80/>95	IP 20
-------	----------------	----------

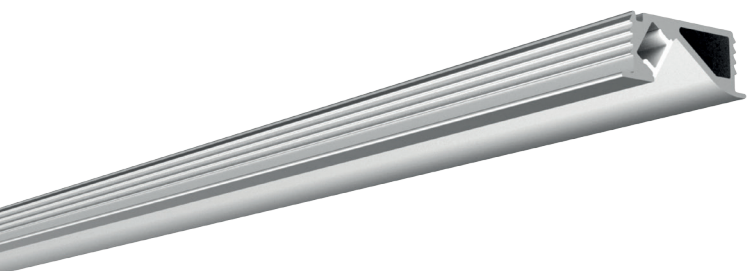

## PROFIL LIGHT LX-PL-LE2409

- Super slim, applicable to a variety of small spaces
- "Dot-free" lighting source producing homogeneous & soft slant lights
- AL6063-T5 aluminum profile with excellent heat dissipation performance
- PC diffuser imported from Germany
- Close-fitting design without screws, optional end caps with or without holes




**luxio**  
L I G H T I N G

[www.luxio-lighting.com](http://www.luxio-lighting.com)

## References

Reference	Led Power	Luminous flux	LEDs	CCT/K	Dimensions
LX-PL-LE2409	6.6W/m	710Lm/m	140 LEDs	1900K/2300K/2700K/3000K/4000K/5000K/6000K	H23.8xW8.8xL2500mm

## Structure image

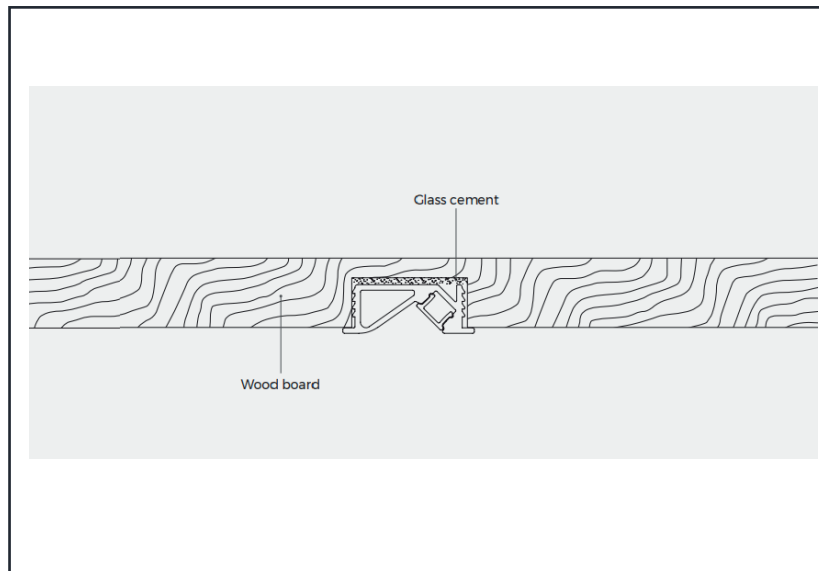

## Optional Accessories



Profile x 1



Diffuser x1



End cap x2




Screw


## Fixings



## Dimensions

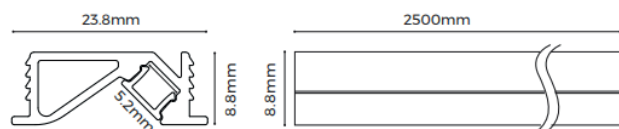

LX-ST-D6140-24V-4mm



**luxio**  
L I G H T I N G

[www.luxio-lighting.com](http://www.luxio-lighting.com)