

PROFIL LIGHT



LX-PL-LE6935(F)

DC24-48V	CRI >80/>95	IP 20
----------	----------------	----------



PROFIL LIGHT LX-PL-LE6935(f)

- Creative magnetic end cap, connect in seconds
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Recessed installation with two optional accessories of N-shaped buckle and butterfly clip
- Won the IF Design Awards 2016




luxio
L I G H T I N G

www.luxio-lighting.com


References

Reference	Led Power	Input Voltage	Luminous flux	LEDs	CCT/K	Dimensions
LX-PL-LS6935(F)	25W/m	AC24V	2760-3250Lm/m	280 LEDs	1900K/2300K/2700K/3000K/ 4000K/5000K/6000K	H35xW69xL2500mm
			2740Lm/m	560 LEDs		
		AC48V	3500Lm/m	320 LEDs		

Optional Accessories



Profile x1



Diffuser x1



Flexible diffuser



Aluminium blind diffuser



Black diffuser



End cap x2

Installation Accessories



Recessed Accessories
(N-shaped buckle)



Recessed Accessories
(butterfly clip)



Reflective paper



Integrated track
cabling accessories

Customizable interconnected corners



"L"-type



"L"-type (inner)



"L"-type
(exterior)



"T"-type




"X"-type I


Fixings



Dimensions

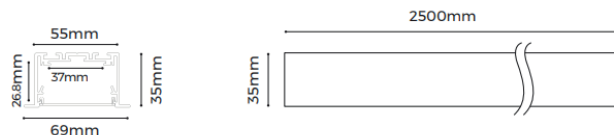


LX-ST-D8280-24V-34mm / LX-ST-D8560SWW24V-34mm
/ LX-ST-DS8320-48V34mm / LX-ST-DY8280-24V36mm /
LX-ST-DY8560SWW24V-36mm

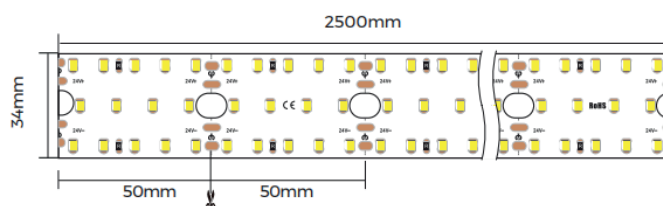

Planar Interconnection

Horizontal interconnection, lighting upward&downward; vertical interconnection, lighting inward&outward

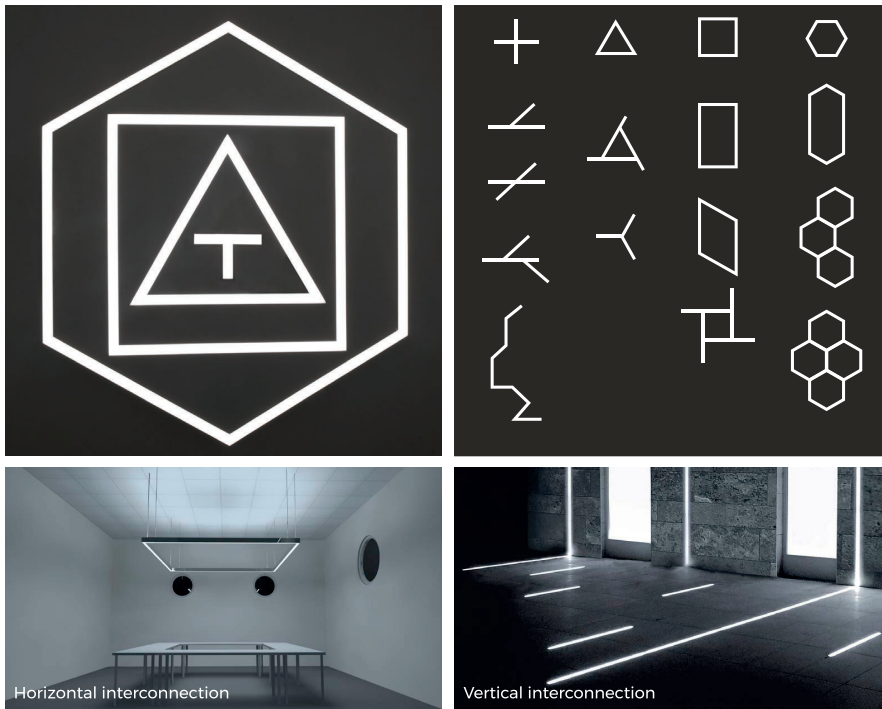

3D Style

Shuttle freely along the edge of ceiling& wall& floor

