


# PROFIL LIGHT



LX-PL-LG2323

DC24V	CRI	IP
	90	20

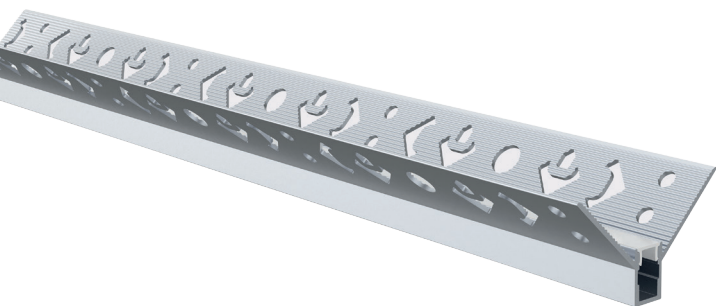

## PROFIL LIGHT LX-PL-LG2323


- Apply to outer corner of wall edges and integrated into the wall by embedded design
- Only 8mm luminous surface outlining the decorative effects in a slim and exquisite manner
- AL6063-T5 aluminum profile with high-quality surface treatment
- Close-fitting design without screw, make installation more convenient



## References

Reference	Led Power	Luminous flux	LEDs	CCT/K	Dimensions
LX-PL-LG2323	6.6W/m	710Lm/m	140 LEDs	1900K/2300K/2700K/3000K/4000K/5000K/6000K	H24.3xW40.3xL2500mm

## Structure image

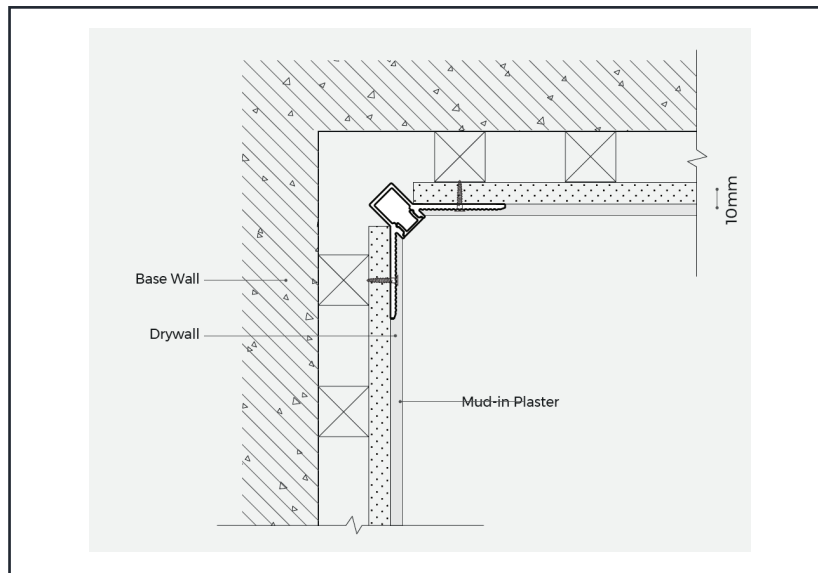

## Optional Accessories



Profile x 1



Diffuser x1



Black Diffuserx1



End capx2




End cap with holex2

## Fixings



## Dimensions

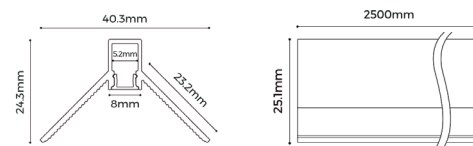

LX-ST-D6140-24V-4mm

