

# PROFIL LIGHT



## LX-PL-LG3030K

DC24V	CRI	IP
	90	20



### PROFIL LIGHT LX-PL-LG3030K


- Designed in a right angle to fit in different wall corners
- Domed lighting & "dot-free" lighting source producing homogeneous & soft lights
- AL6063-T5 aluminum profile with excellent heat dissipation performance
- PC diffuser imported from Germany
- Optional end caps with or without hole




## References

Reference	Led Power	Luminous flux	LEDs	CCT/K	Dimensions
LX-PL-LG3030K	15W/m	1508Lm/m	280 LEDs	1900K/2300K/2700K/3000K/4000K/5000K/6000K	H30xW30xL2500mm


## Structure image

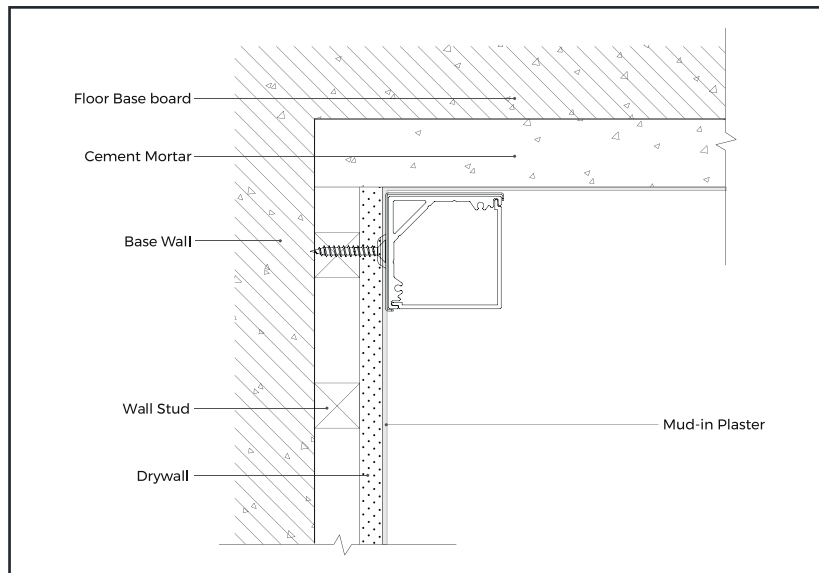

## Optional Accessories



Profile x 1



Diffuser x1



End cap x2




End cap with hole x2




Mounting clip

## Fixings



## Dimensions

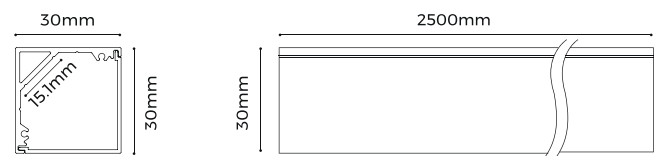

LX-ST-D6280-24V-10mm

