


PROFIL LIGHT



LX-PL-LR2013

| | | |
|-------|-----|----|
| DC24V | CRI | IP |
| | 90 | 20 |

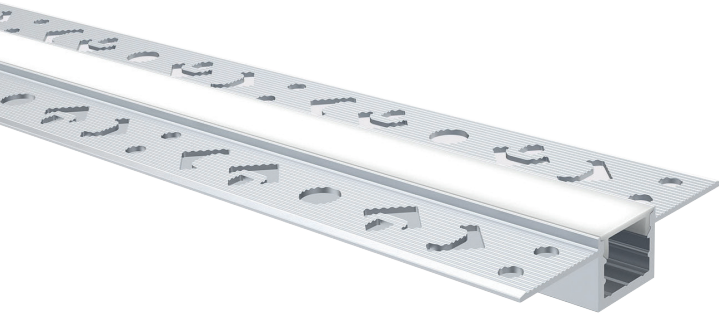

PROFIL LIGHT LX-PL-LR2013

- 20mm luminous surface, trimless recessed design, integrated into architecture
- PC diffuser imported from Germany, producing homogenous & soft lighting
- AL6063-T5 aluminum profile with high-quality surface treatment




luxio
L I G H T I N G

www.luxio-lighting.com


References

| Reference | Led Power | Luminous flux | LEDs | CCT/K | Dimensions |
|--------------|-----------|---------------|----------|---|-----------------|
| LX-PL-LR2013 | 15W/m | 1508Lm/m | 280 LEDs | 1900K/2300K/2700K/3000K/4000K/5000K/6000K | H20xW13xL2500mm |


Structure image

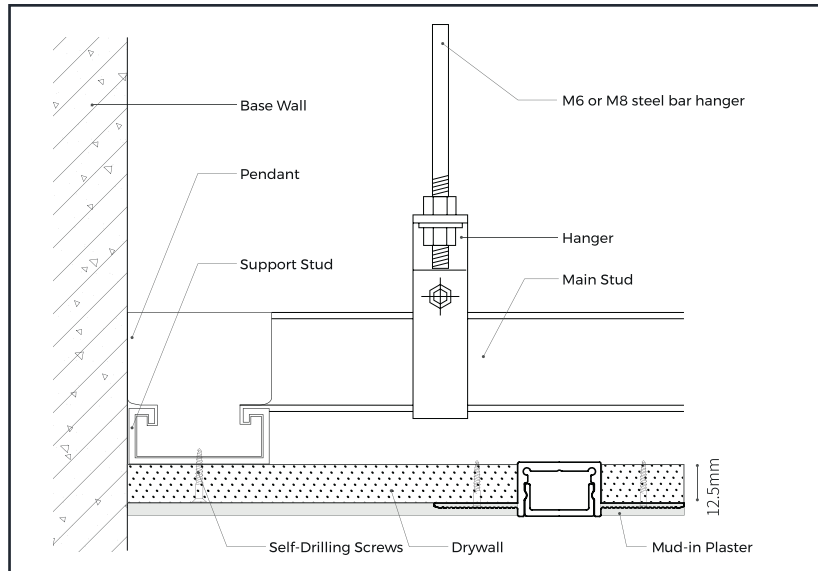


Optional Accessories

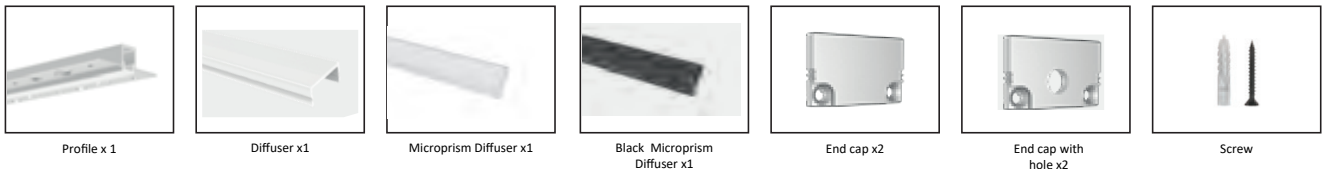

Fixings



Dimensions

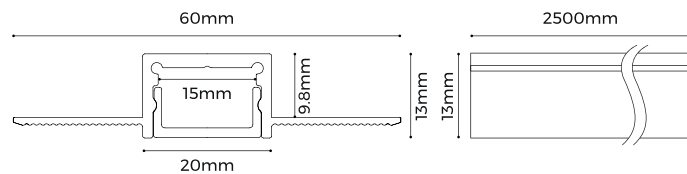

LX-ST-D6280-24V-10mm

