


PROFIL LIGHT



LX-PL-LR3943

DC24V	CRI >80/>95	IP 20
-------	----------------	----------

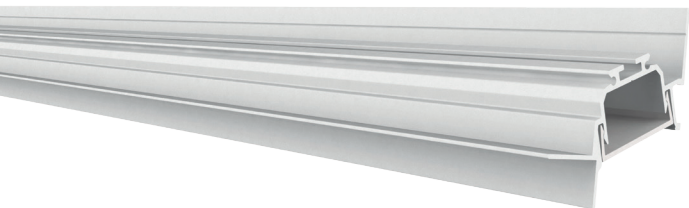

PROFIL LIGHT LX-PL-LR3943

- Apply to the edge of ceiling to achieve the lighting effect of washing walls
- Embedded design, integrated with architecture
- AL6063-T5 aluminum profile with high-quality surface treatment




luxio
L I G H T I N G

www.luxio-lighting.com

References

Reference	Led Power	Luminous flux	LEDs	CCT/K	Dimensions
LX-PL-LR3943	20W/m	2300-2700Lm/m	280 LEDs	1900K/2300K/2700K/3000K/4000K/5000K/6000K	H58xW59xL2500mm

Structure image

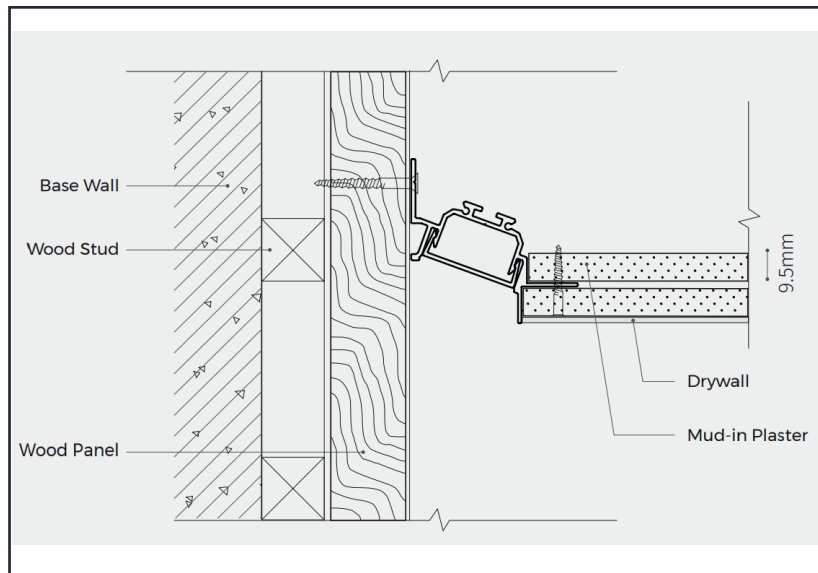

Optional Accessories



Profile x 1



Diffuser x1



End cap x2




Screw


Fixings



Dimensions

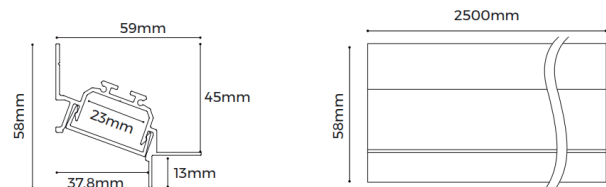

LX-ST-D8280-24V-20mm



luxio
L I G H T I N G

www.luxio-lighting.com