

# PROFIL LIGHT



## LX-PL-LR5535(B)

DC24-48V	CRI >80/>95	IP 20
----------	----------------	----------



### PROFIL LIGHT LX-PL-LR5535(B)

- Several optional diffuser: general PC diffuser, flexible PC diffuser, black diffuser, aluminium blind diffuser
- 50mm large luminous surface, trimless recessed design, integrated into architecture
- Leakage proof shield design, perfect details
- AL6063-T5 aluminum profile with high-quality surface treatment, black, white and silver are optional
- Multiple optional connectors: 180° direct connection, L type, T type, X type




## References

Reference	Led Power	Input Voltage	Luminous flux	LEDs	CCT/K	Dimensions
LX-PL-LR5535(B)	25W/m	AC24V	2760-3250Lm/m	280 LEDs	1900K/2300K/2700K/3000K/ 4000K/5000K/6000K	H35xW93xL2500mm
			2740Lm/m	560 LEDs		
		AC48V	3500Lm/m	320 LEDs		

## Optional Accessories



Profile x1



Diffuser x1



Flexible diffuser



Aluminium blind diffuser



Black diffuser



End cap x2

## Installation Accessories



Reflective paper



Install screw

## Customizable interconnected corners



"L"-type



"L"-type (inner)



"L"-type (exterior)



"T"-type




"X"-type I


## Fixings



## Dimensions

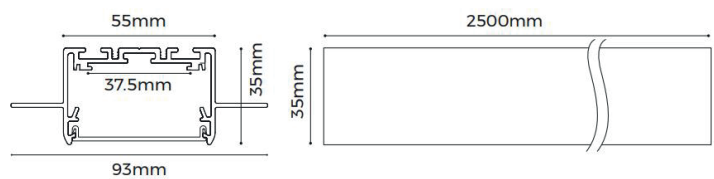


LX-ST-D8280-24V-34mm / LX-ST-D8560SWW-24V-34mm  
/ LX-ST-DS8320-48V-34mm / LX-ST-DY8280-24V-36mm /  
LX-ST-DY8560SWW-24V-36mm

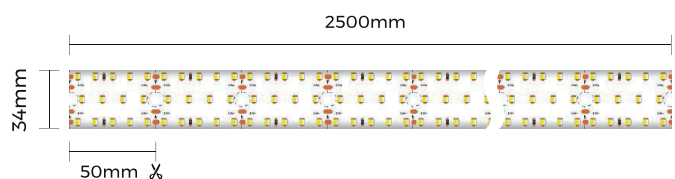

## Planar Interconnection

Horizontal interconnection, lighting upward&downward; vertical interconnection, lighting inward&outward

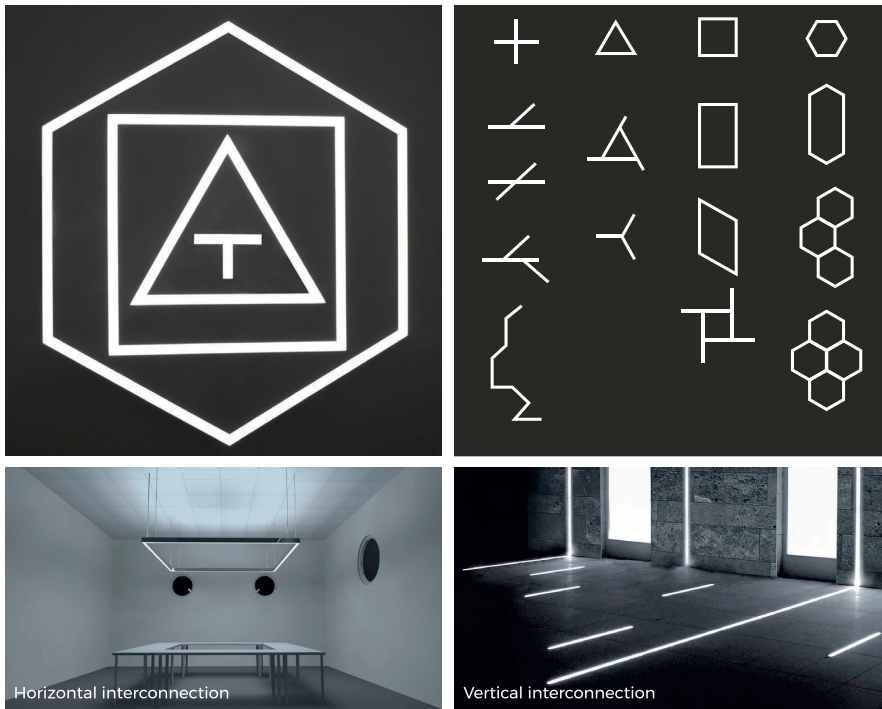

## 3D Style

Shuttle freely along the edge of ceiling& wall& floor

