

PROFIL LIGHT



LX-PL-LS1612L

DC24V	CRI >80/>95	IP 20
-------	----------------	----------



PROFIL LIGHT LX-PL-LS1612L


- By changing the position of the carrier, a variety of beam angles of 20° /40° /60° /80° can be achieved
- AL6063-T5 aluminum profiles with high quality surface treatment and three optional colors of black, white and silver
- Close-fitting design without screws, optional end caps with or without holes



References

Reference	Led Power	Luminous flux	LEDs	CCT/K	Dimensions
LX-PL-LS1612L	6.6W/m	710Lm/m	140 LEDs	1900K/2300K/2700K/3000K/4000K/5000K/6000K	H18xW16xL2500mm

Structure image

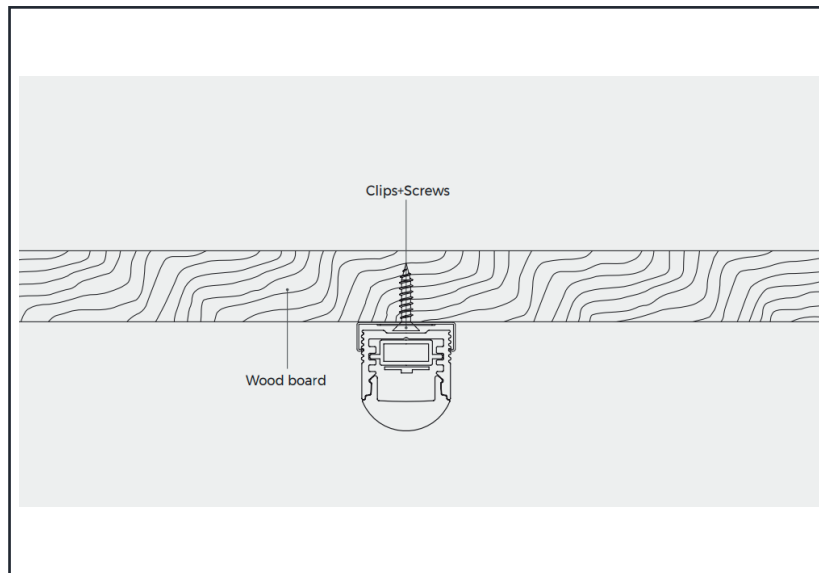

Optional Accessories



Profilex1



Diffuser x1



End cap x2



End cap with holex2



Mounting clip





0-180° adjustable mounting clip




0-90° adjustable mounting clip

Fixings



Dimensions

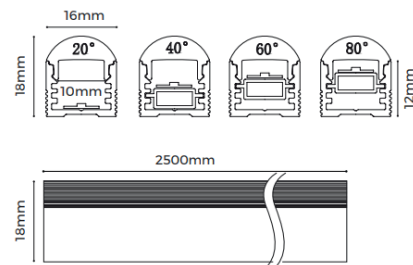

LX-ST-D6140-24V-8mm



luxio
L I G H T I N G

www.luxio-lighting.com