


PROFIL LIGHT




LX-PL-LS1613

DC24V	CRI 90	IP 20
-------	-----------	----------

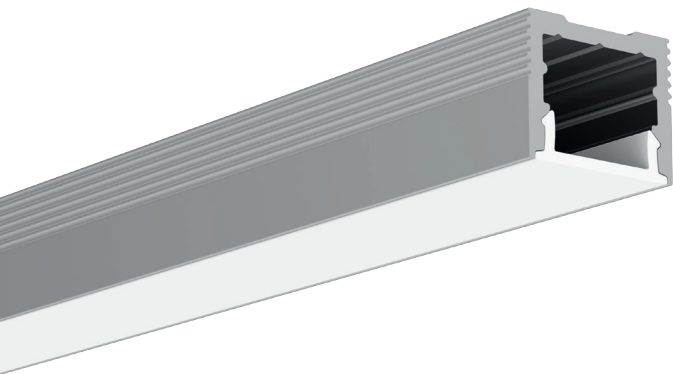

PROFIL LIGHT LX-PL-LS1613


- "Dot-free" lighting source producing homogeneous & soft lights
- AL6063-T5 aluminum profile with excellent heat dissipation performance
- PC diffuser imported from Germany
- Close-fitting design without screws, optional end cap with or without holes
- Optional fixed clips for light angel adjustment as you wish

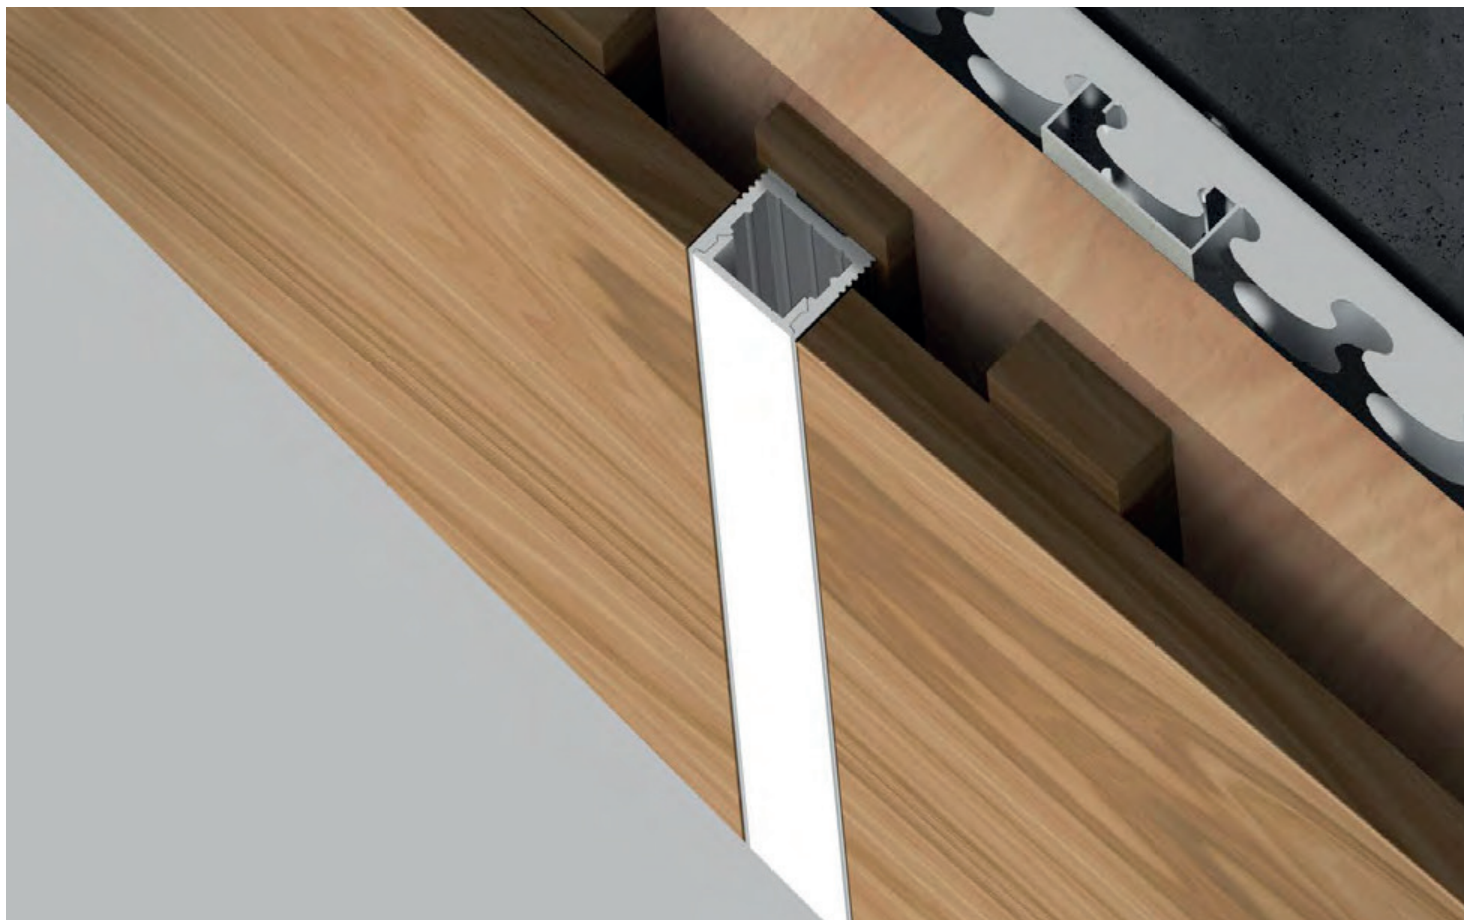


References

Reference	Led Power	Luminous flux	LEDs	CCT/K	Dimensions
LX-PL-LS1613	6.6W/m	710Lm/m	140 LEDs	1900K/2300K/2700K/3000K/4000K/5000K/6000K	H13xW16xL2500mm


Structure image

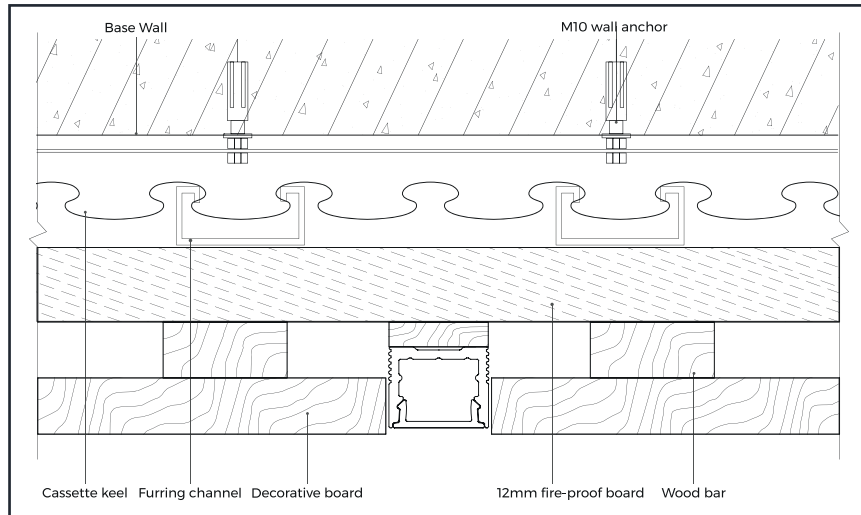

Optional Accessories

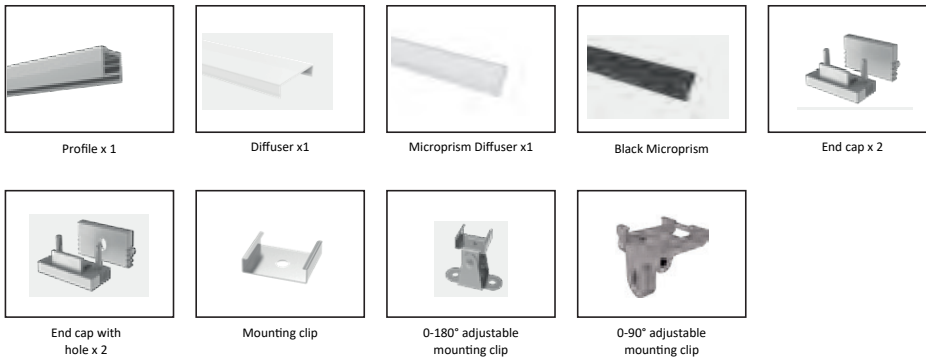

Fixings



Dimensions

