

PROFIL LIGHT



LX-PL-LS1911C

DC24V	CRI >80/>95	IP 20
-------	----------------	----------



PROFIL LIGHT LX-PL-LS1911C


- Three-side lighting & "dot-free" lighting source producing homogeneous & soft lights
- AL6063-T5 aluminum profile with excellent heat dissipation performance
- PC diffuser imported from Germany
- Optional end caps with or without hole
- Free & flexible connection




References

Reference	Led Power	Luminous flux	LEDs	CCT/K	Dimensions
LX-PL-LS1911C	15W/m	1508Lm/m	280 LEDs	1900K/2300K/2700K/3000K/4000K/5000K/6000K	H19.7xW19.6xL2500mm


Structure image

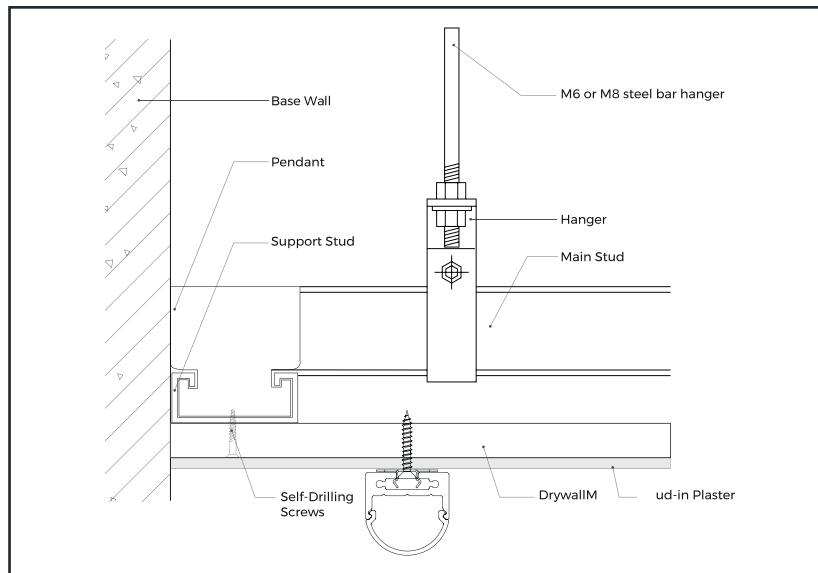


Optional Accessories

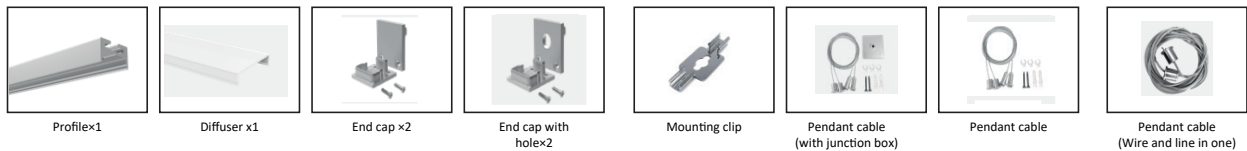


Fixings

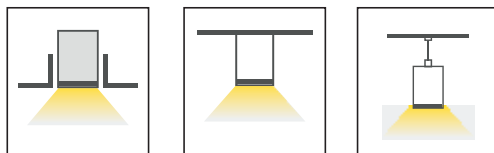

Dimensions

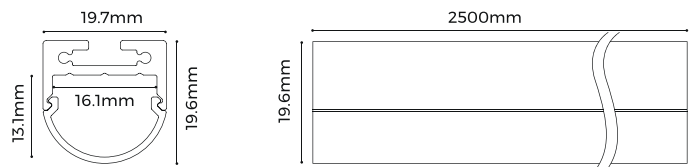

LX-ST-D6280-24V-10mm



luxio
L I G H T I N G

www.luxio-lighting.com