

PROFIL LIGHT


LX-PL-LS1911K

| | | |
|-------|----------------|----------|
| DC24V | CRI >80/>95 | IP 20 |
|-------|----------------|----------|



PROFIL LIGHT LX-PL-LS1911K

- Three-side lighting & "dot-free" lighting source producing homogeneous & soft lights
- AL6063-T5 aluminum profile with excellent heat dissipation performance
- PC diffuser imported from Germany
- Optional end caps with or without hole
- Free & flexible connection

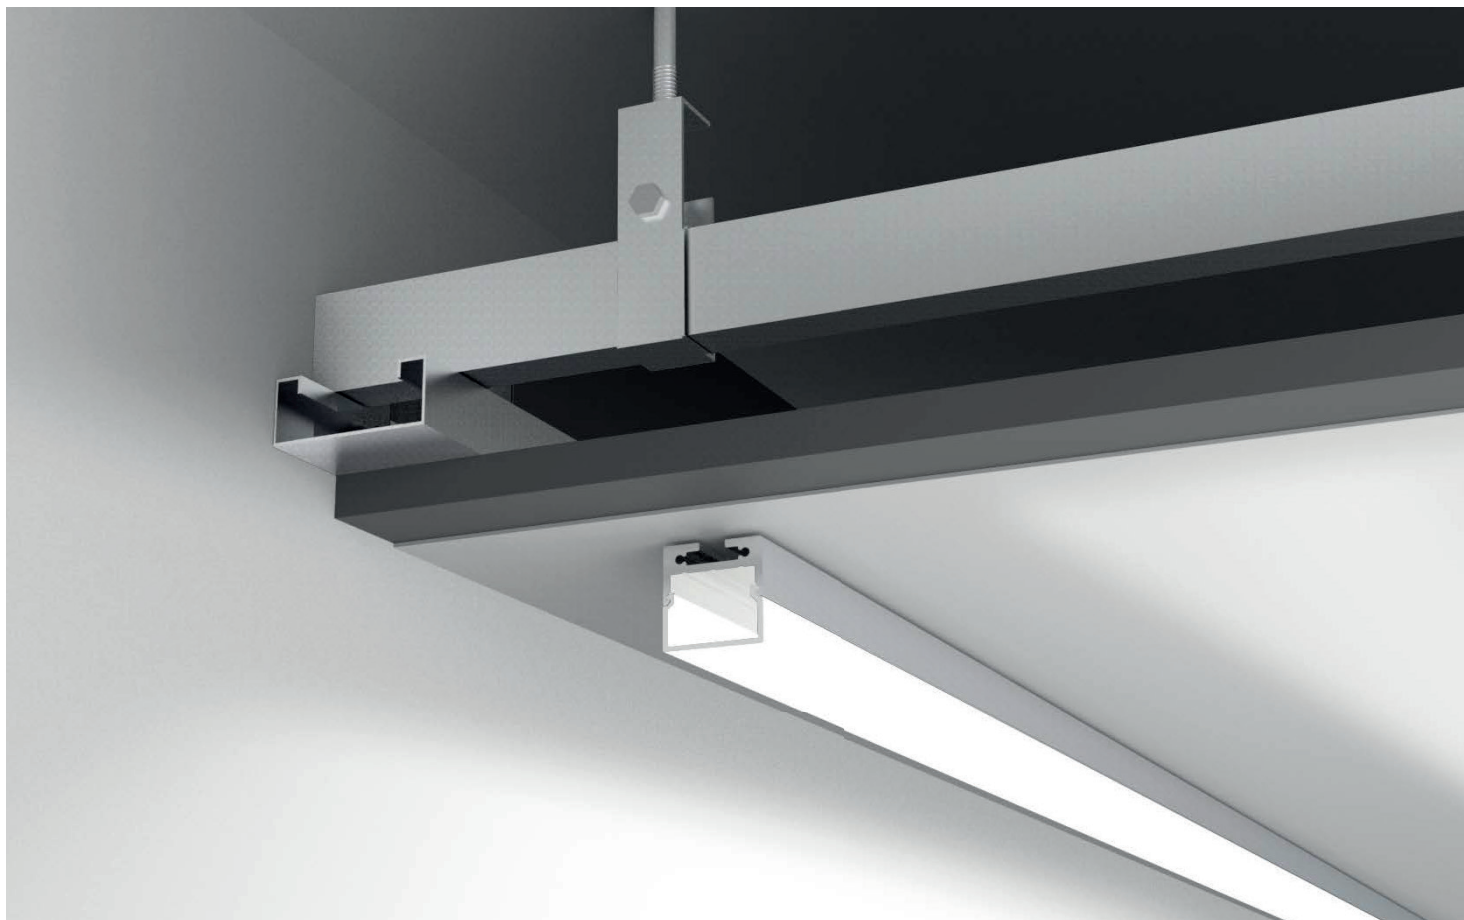


luxio
L I G H T I N G

www.luxio-lighting.com


References

| Reference | Led Power | Luminous flux | LEDs | CCT/K | Dimensions |
|---------------|-----------|---------------|----------|---|---------------------|
| LX-PL-LS1911K | 15W/m | 1508Lm/m | 280 LEDs | 1900K/2300K/2700K/3000K/4000K/5000K/6000K | H19.7xW19.7xL2500mm |


Structure image

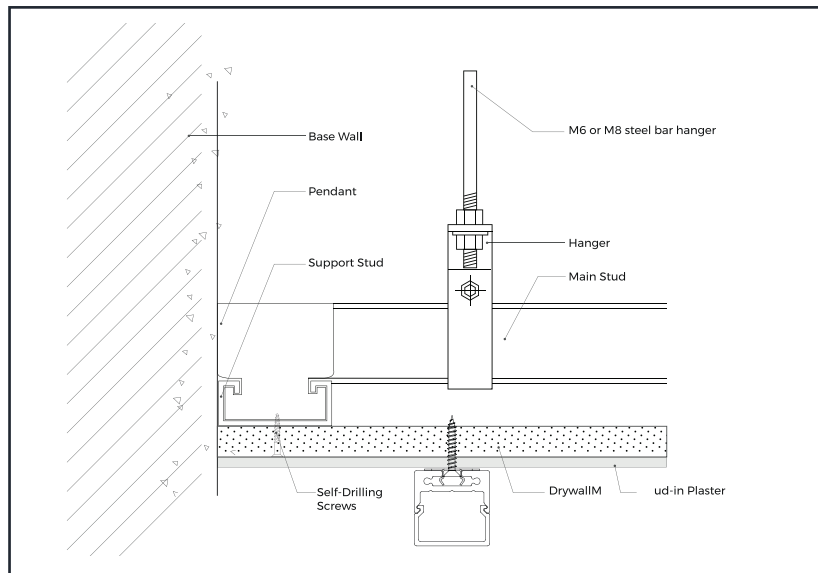


Optional Accessories

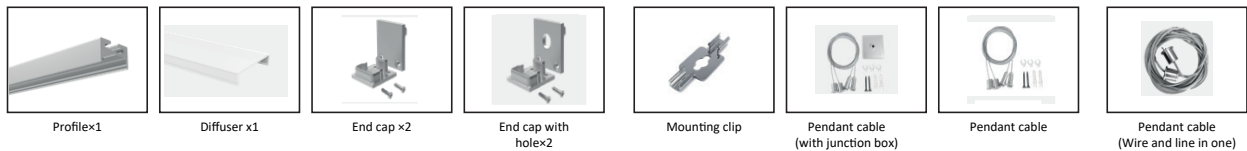

Fixings

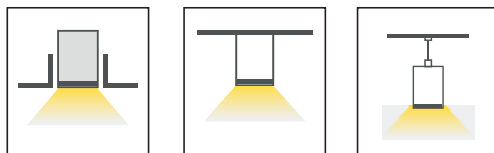

Dimensions

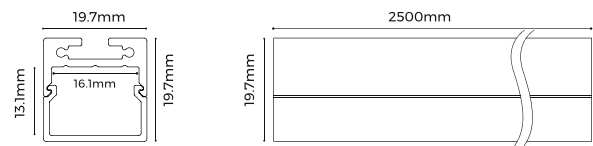

LX-ST-D6280-24V-10mm

