

PROFIL LIGHT


LX-PL-LS2126

DC24V	IP 65	IK 10	CRI 90
-------	----------	----------	-----------



PROFIL LIGHT LX-PL-LS2126

- AL6063-T5 aluminum profile with high-quality surface treatment
- "Dot-free" lighting source producing homogeneous & soft lights
- IK10, IP65 waterproof level design, can be used widely in indoor and outdoor floors

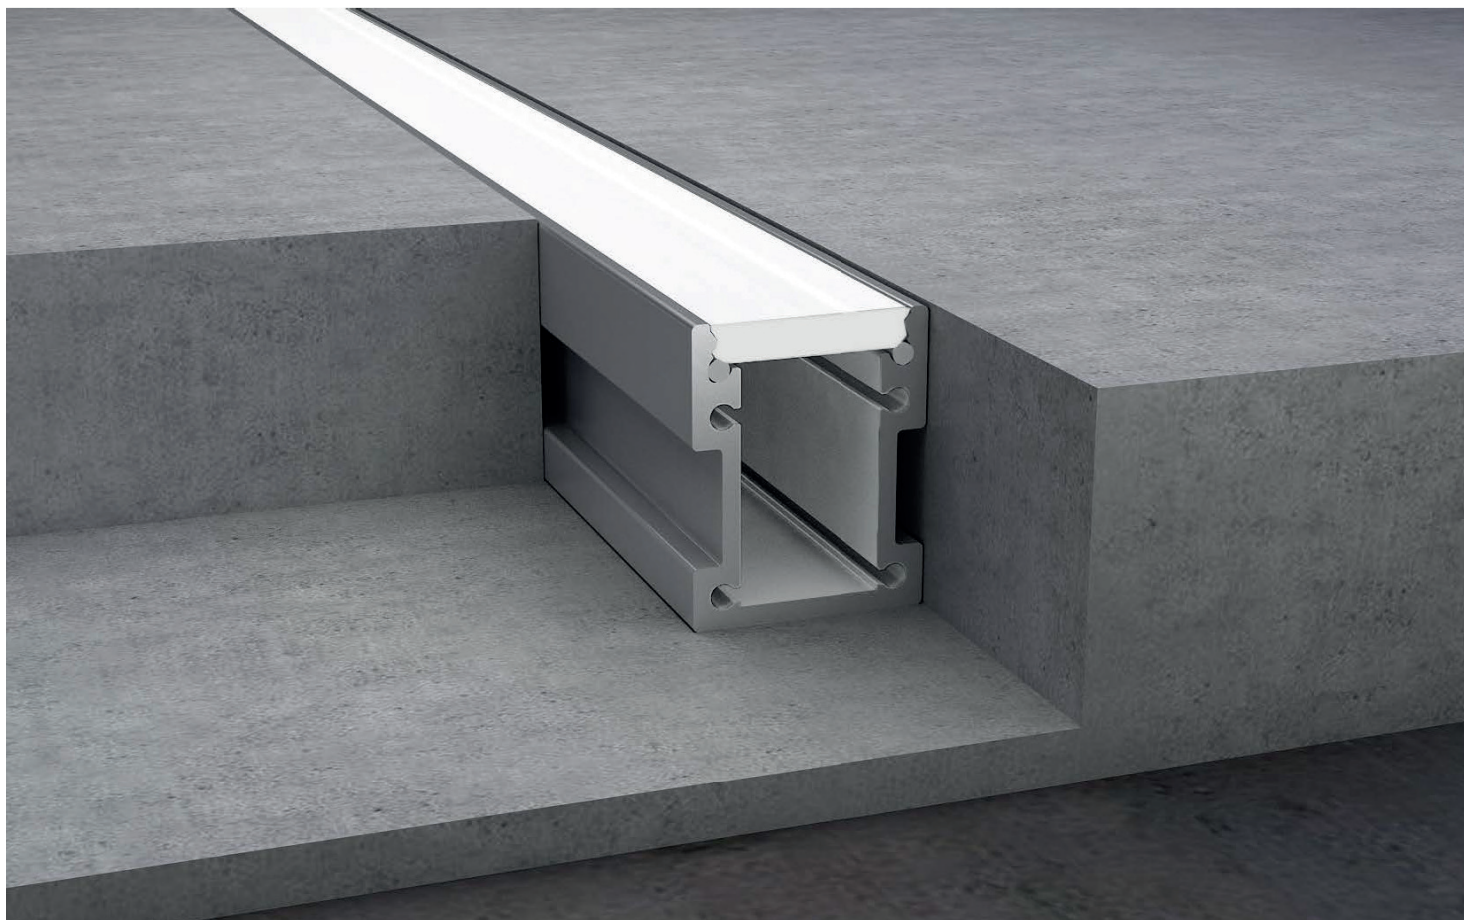


luxio
L I G H T I N G

www.luxio-lighting.com


References

Reference	Led Power	Luminous flux	LEDs	CCT/K	Dimensions
LX-PL-LS2126	6.6W/m	710Lm/m	140 LEDs	1900K/2300K/2700K/3000K/4000K/5000K/6000K	H21.4xW27xL2500mm

Structure image

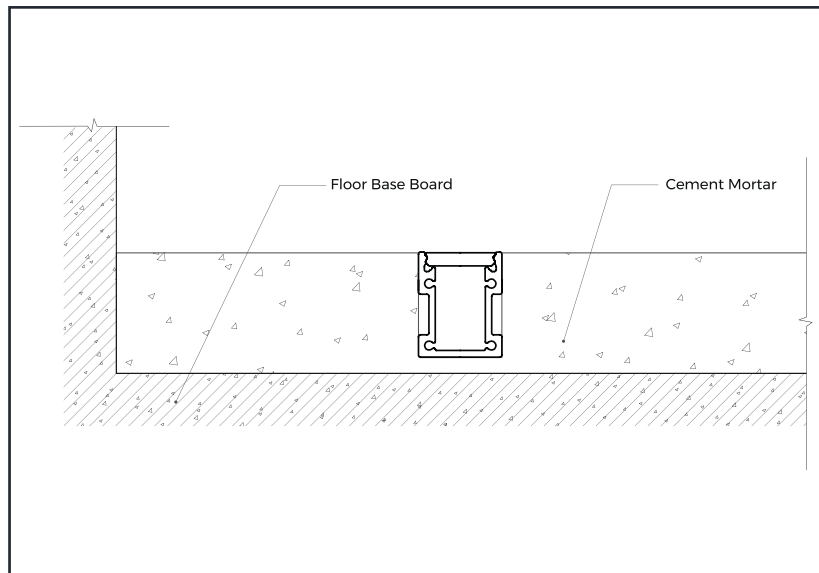

Optional Accessories



Profile x 1




Diffuser x1




End cap with hole x2

Fixings



Dimensions

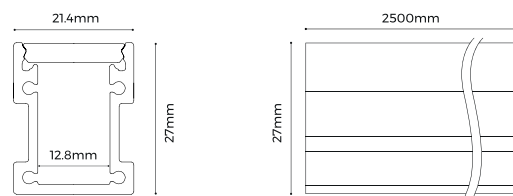

LX-ST-D6140-24V-8mm

