

# PROFIL LIGHT


LX-PL-LS4067

DC24V	CRI >80/>95	IP 20
-------	----------------	----------



## PROFIL LIGHT LX-PL-LS4067

- Creative magnetic end cap, connect in seconds
- Designed in creative carrier buckle extremely convenient for installation and maintenance
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Built-in linear power supply, invisible and beautiful
- Various installation ways: pendant, recessed, surface and wall mounted

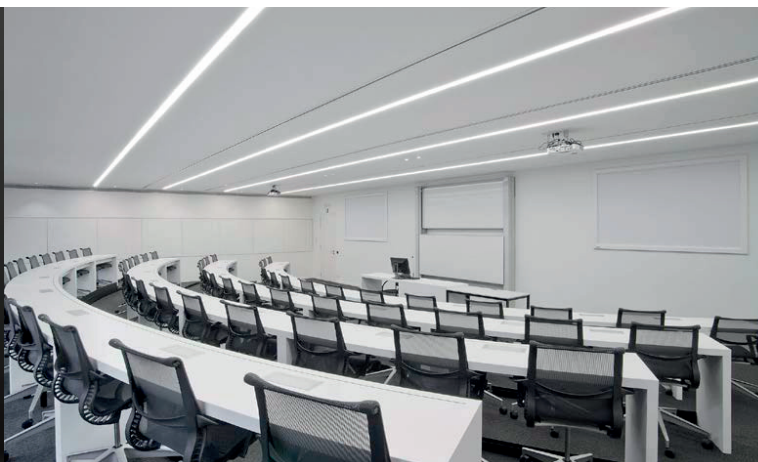


**luxio**  
L I G H T I N G

[www.luxio-lighting.com](http://www.luxio-lighting.com)

## References

Reference	Led Power	Input Voltage	Luminous flux	LEDs	CCT/K	Dimensions
LX-PL-LS4067	20W/m	AC24V	2290-2700Lm/m	280 LEDs	1900K/2300K/2700K/3000K/ 4000K/5000K/6000K	H67xW40xL2500mm

## Optional Accessories

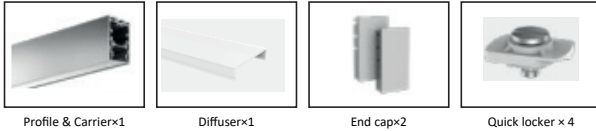


Profile & Carrierx1

Diffuserx1

End capx2

Quick locker x 4

## Installation Accessories

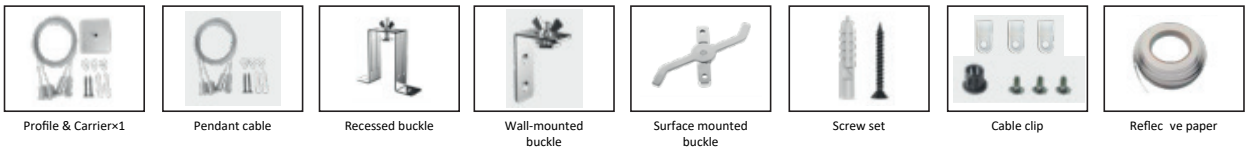

Profile & Carrierx1

Pendant cable

Recessed buckle

Wall-mounted buckle


Surface mounted buckle

Screw set

Cable clip

Reflector paper

## Customizable interconnected corners

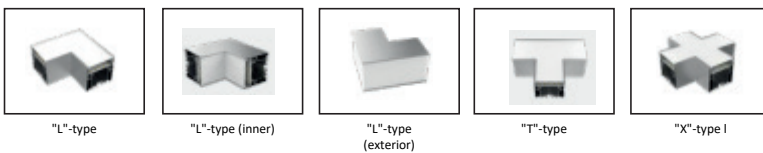

"L"-type


"L"-type (inner)

"L"-type (exterior)


"T"-type

"X"-type I


## Fixings



## Dimensions

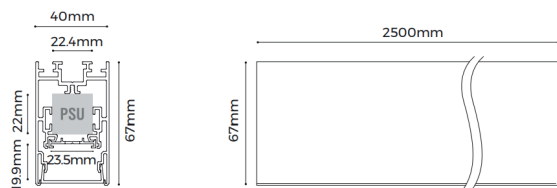


LX-ST-D8280-24V-20mm /  
LX-ST-DY8280-24V-23mm

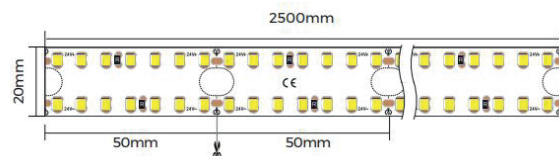

## Planar Interconnection

Horizontal interconnection, lighting upward&downward; vertical interconnection, lighting inward&outward

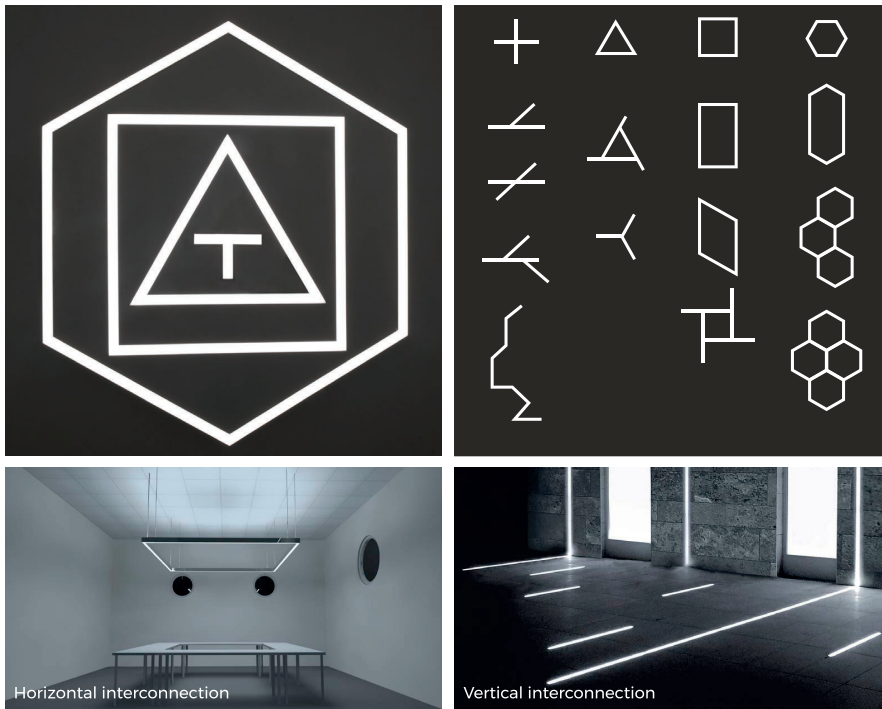

## 3D Style

Shuttle freely along the edge of ceiling& wall& floor

