

PROFIL LIGHT



LX-PL-LS7977

DC24-48V	CRI >80/>90/>95	IP 20
----------	--------------------	----------



PROFIL LIGHT LX-PL-LS7977

- Creative magnetic end cap, connect in seconds
- Designed in creative carrier buckle extremely convenient for installation and maintenance
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Built-in linear power supply, invisible and beautiful
- Various installation ways: pendant, recessed and surface mounted



luxio
L I G H T I N G

www.luxio-lighting.com

References

Reference	Led Power	Input Voltage	Luminous flux	LEDs	CCT/K	Dimensions
LX-PL-LS7977	30W/m	AC24V	3310-3900Lm/m	420 LEDs	1900K/2300K/2700K/3000K/ 4000K/5000K/6000K	H79xW77xL2500mm
		AC48V	4600Lm/m	480 LEDs		

Installation Accessories



Pendant cable
(with junction box)



Pendant cable



Recessed buckle



Surface mounted
buckle



Screw set



Cable clip



Reflective paper



Integrated track
cabling accessories

Customizable interconnected corners



L-type



L-type (inner)



L-type (exterior)



T-type



X-type

Optional Accessories



Profile & Carrier x 1



Diffuser x1






End cap x2




Quick locker x4

Fixings



Dimensions

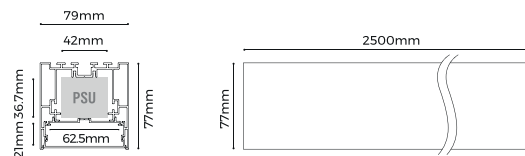

LX-ST-D8480-24V-59mm / LX-ST-DS8480-48V-59mm
/LX-ST-DY8280-24V-62mm

