

# PROFIL LIGHT



White

LX-PL-SK10032

DC24V	CRI	IP
	90	20



## PROFIL LIGHT LX-PL-SK10032

- Apply to skirting board , integrated into architecture
- Indirect lighting design
- AL6063-T5 aluminum profile with high-quality surface treatment, white and silver are optional




**luxio**  
L I G H T I N G

[www.luxio-lighting.com](http://www.luxio-lighting.com)

## References

Reference	Led Power	Luminous flux	LEDs	CCT/K	Dimensions
LX-PL-SK10032	6.6W/m	710Lm/m	140 LEDs	1900K/2300K/2700K/3000K/4000K/5000K/6000K	H99.5xW31.7xL2500mm

## Structure image

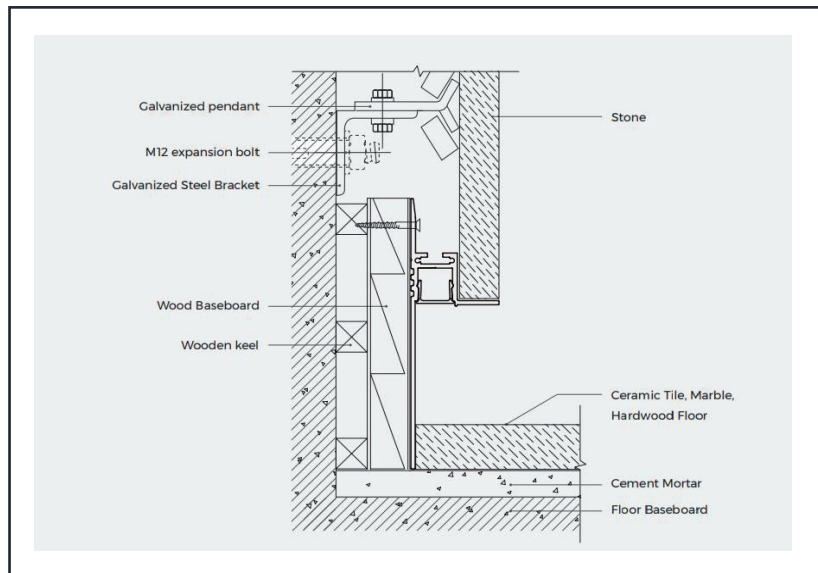

## Optional Accessories



Profile x 1




Diffuser x1




Screw


## Fixings



## Dimensions

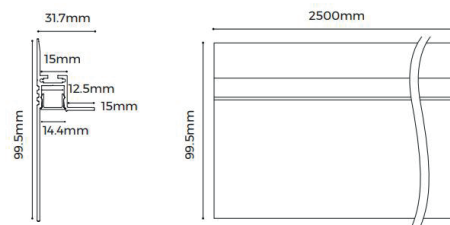

LX-ST-D6140-24V-8mm



**luxio**  
L I G H T I N G

[www.luxio-lighting.com](http://www.luxio-lighting.com)