

WALL LIGHT




LX-WL-10A-2-4W



Wall Light

FRONT COVER	12# Die-casting aluminum KAP7037 powder coated t=60-80µm. Adhesion of ISO CLASS 1 / ASTM class 4B
LIGHT WINDOW	Tempered glass T=2mm
CABLE CABLE	IP68 PG-9 PA66
GASKET	Molding shaped silicone seal
RECESSED SLEEVE	PC/ABS ALLOYS
LED DRIVER	Constant Voltage Input, Constant Current Output
OPERATING TEMPERATURE	-20°C-40°C
POWER CABLE	H05RN-F 2×1.0mm² L=0.5m (low voltage) H05RN-F 3×1.0mm² L=0.5m (high voltage)
DIMMABLE SURPPOINT	Triac • PWM • 1-10V • Dali (Please refer to p.333 to see more option and specification)

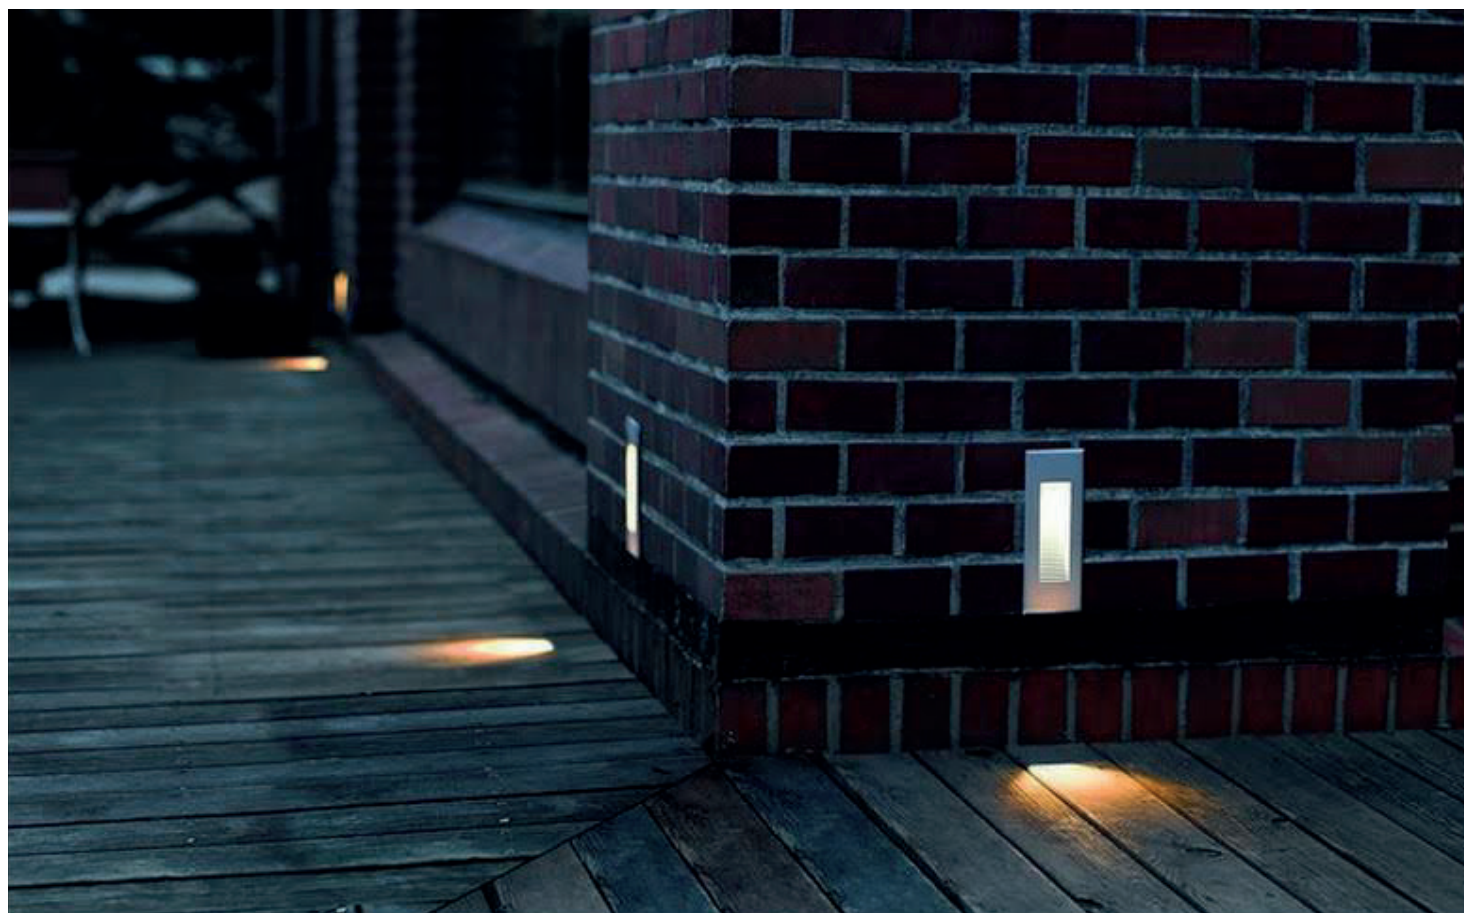

References

Reference	Led Power	Input Voltage	Led Quantity	Luminous flux	CCT/K	IP Rating	Dimensions
LX-WL-10A-2-4W	2x1.5W	DC24V AC120-240V	2pcs	137-160lm	2000K/3000K /6000K	IP65	L76xH255xW70mm

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Housing color option

Basic



Sanded Dark Grey
KAP 7037

Secondary




Sanded Black
RAL 9005





Silver Grey
KAP 9022

Diagram of instruction

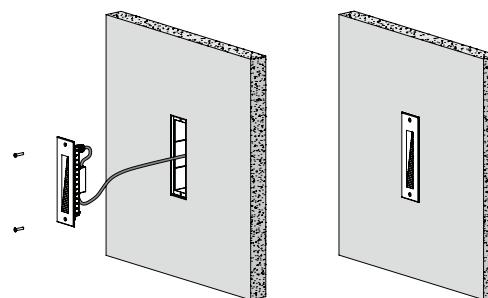

Dimensions



Features



- The above picture – the supporting plate "A1" and "A2" are used for preventing deformation of the sleeve during the construction installation process.
- Please remove the supporting plate "A1" and "A2" from the mounting sleeve before the lamp installation.



• Low Voltage Type



• High voltage Type