

# WALL LIGHT



LX-WL-11-2-2W



## Wall Light

FRONT COVER	12# Die-casting aluminum KAP7037 powder coated t=60-80µm. Adhesion of ISO CLASS 1 / ASTM class 4B
LIGHT WINDOW	Tempered glass T=2mm
CABLE CABLE	IP68 PG-9 PA66
GASKET	Molding shaped silicone seal
RECESSED SLEEVE	PC/ABS ALLOYS
LED DRIVER	Constant Voltage Input, Constant Current Output
OPERATING TEMPERATURE	-20°C-40°C
POWER CABLE	H05RN-F 2×1.0mm² L=0.5m (low voltage) H05RN-F 3×1.0mm² L=0.5m (high voltage)
DIMMABLE SURPPOINT	Triac•PWM•1-10V•Dali (Please refer to p.333 to see more option and specification)



## References

Reference	Led Power	Input Voltage	Led Quantity	Luminous flux	CCT/K	IP Rating	Dimensions
LX-WL-11-2-2W	1×2.0W	DC24V AC120-240V	1pc	104-110lm	2000K/3000K /6000K	IP65	L63×H195×W68mm

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

## Housing color option

Basic



Sanded Dark Grey  
**KAP 7037**

Secondary




Sanded Black  
**RAL 9005**





Silver Grey  
**KAP 9022**


## Diagram of instruction

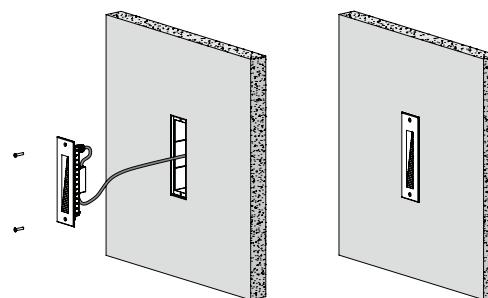


## Dimensions



## Features



- The right picture – the supporting plate "A1" is used for preventing deformation of the sleeve during the construction installation process.
- Please remove the supporting plate "A1" from the mounting sleeve before the lamp installation.



- High voltage Type