

WALL LIGHT



LX-WL-138



Wall Light

HOUSING MATERIAL 12# Die-casting dark grey powder coated aluminum
T=60-80µm. Adhesion of ISO class 1/ASTM class 4B

REFLECTOR Optical reflector, efficiency ≥ 85%

LIGHT WINDOWS PMMA T=6mm

LED DRIVER Constant voltage Input, Constant Current Output

OPERATING TEMPERATURE -20°C-40°C

POWER CABLE H05RN-F 3×1.0mm² L=0.3m (low voltage)



luxio
L I G H T I N G

www.luxio-lighting.com

References

Reference	Led Power	Luminous flux	Input Voltage	CCT/K	IK Rating	IP Rating	Optics	Light direction	Dimensions
LX-WL-138	1*8W	689lm	DC24V AC120-240V	3000K/6000K	IK08	IP65	15°/24°/38°/50°	One side	Ø82*H125mm
	2*8W	2*750lm						Two side	Ø82*H170mm

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Housing color option

Basic



Sanded Dark Grey
KAP 7037




Silver Grey
KAP 9022

Secondary




Sanded Black
RAL 9005

Diagram of instruction

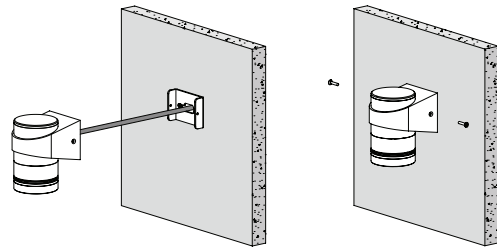

Dimensions

LX-WL-138-8W



LX-WL-138-16W

