

WALL LIGHT

LX-WL-139



IP 65	IK 05	DC24V AC120-240V	TRIAC	PMW	1-10V	FAIR
2 YEAR WARRANTY	NICHIA	CE	RoHS	50000h		

Wall Light


HOUSING MATERIAL T=60~80µm, adhesion of ISO CLASS 1/astm class 4B
12# Die-casting dark grey powder coated aluminum

LIGHT WINDOW Tempered Glass T=3.5mm

LED DRIVER Constant Voltage Input, Constant Current Output

OPERATING TEMPERATURE -20°C-40°C

POWER CABLE H05RN-F 2×1.0mm² L=0.3m (low voltage)
H05RN-F 3×1.0mm² L=0.3m (high voltage)

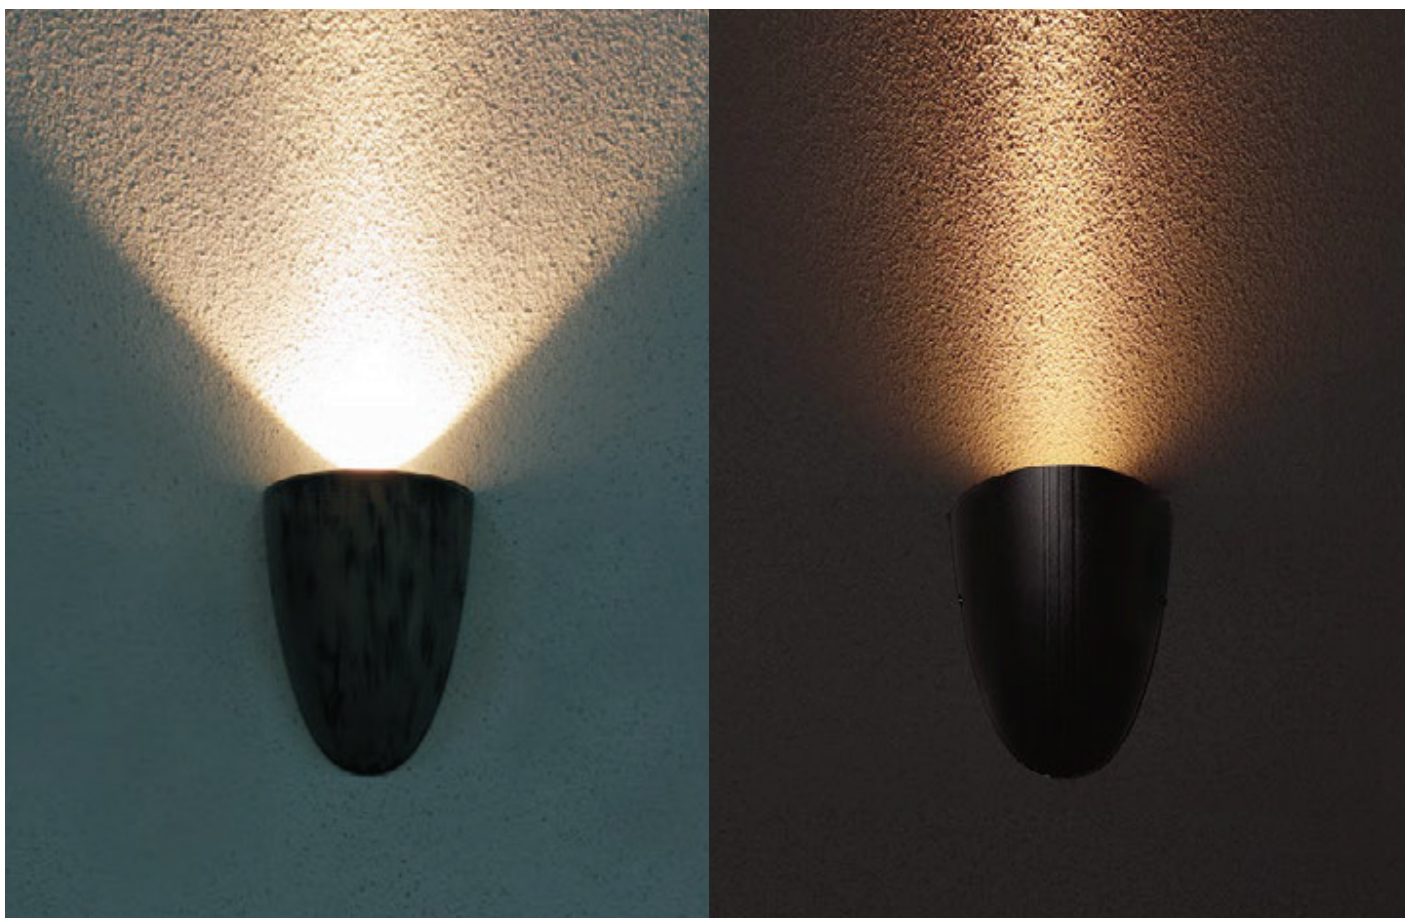

luxio
L I G H T I N G

www.luxio-lighting.com

References

Reference	Led Power	Luminous flux	Input Voltage	CCT/K	IK Rating	IP Rating	Optics	Dimensions
LX-WL-139	1×12W	809-834lm	DC24V AC120-240V	3000K/6000K	IK05	IP65	25°	H220*L156*W90mm
	1×6W	444-500lm					10°/15°/25°	

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Housing color option

Basic



Sanded Dark Grey
KAP 7037

Secondary




Sanded Black
RAL 9005




Silver Grey
KAP 9022


Diagram of instruction

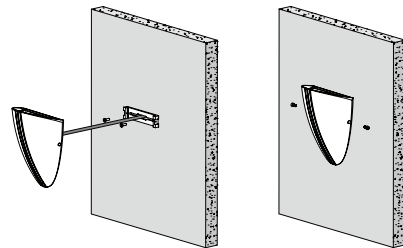

Dimensions

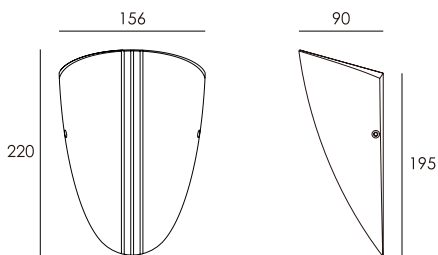

Beam demo



LX-WL-139-12W



LX-WL-139-6W