

WALL LIGHT

LX-WL-22



Wall Light

HOUSING & FRONT COVER	12# Die-casting grey powder coated aluminum T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
LIGHT WINDOW	UVstop & Fireproof PC T=3mm
CABLE CABLE	IP68 PG-9 PA66
GASKET	Molding shaped silicone seal
RECESSED SLEEVE	PC/ABS ALLOYS
LED DRIVER	Constant Voltage Input, Constant Current Output
OPERATING TEMPERATURE	-20°C-40°C
POWER CABLE	H05RN-F 2×1.0mm² L=0.5m (low voltage) H05RN-F 3×1.0mm² L=0.5m (high voltage)
DIMMABLE SURPPORT	Triac•PWM•1-10V•Dali (Please refer to p.333 to see more option and specification)



References

Reference	Led Power	Input Voltage	Led Quantity	Luminous flux	CCT/K	IP Rating	Dimensions
LX-WL-22-2-3W	10×0.2W	DC24V AC120-240V	10pcs	42-50lm	2000K/3000K /6000K	IP65	L195×H63×W68mm
LX-WL-22-2-6W	54×0.07W		54pcs	138-226lm			L255×H76×W70mm

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Housing color option

Basic



Sanded Dark Grey
KAP 7037



Silver Grey
KAP 9022

Secondary



Sanded Black
RAL 9005

Features



- The above picture – the supporting plate "A1" and "A2" are used for preventing deformation of the sleeve during the construction installation process.
- Please remove the supporting plate "A1" and "A2" from the mountingsleeve before the lamp installation.




• Low Voltage Type



• High voltage Type

Dimensions

LX-WL-22-2-6W

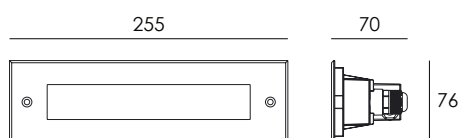

LX-WL-22-2-3W

