

# WALL LIGHT

LX-WL-29-2-3W



## Wall Light

HOUSING & FRONT COVER	12# Die-casting grey powder coated aluminum T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
LIGHT WINDOW	Glass T=1.8mm
CABLE CABLE	IP67 copper and nicked coated
GASKET	Molding shaped silicone seal
LED DRIVER	Constant Voltage Input, Constant Current Output
OPERATING TEMPERATURE	-20°C-40°C
POWER CABLE	H05RN-F 2×1.0mm <sup>2</sup> L=0.5m (low voltage) H05RN-F 3×1.0mm <sup>2</sup> L=0.5m (high voltage)
DIMMABLE SURPPOINT	Triac•PWM•1-10V•Dali (Please refer to p.333 to see more option and specification)



# References

Reference	Led Power	Input Voltage	Led Quantity	Luminous flux	CCT/K	IP Rating	Dimensions
LX-WL-29-2-3W	15x0.15W	DC24V AC120-240V	15pcs	87-92lm	2000K/3000K /6000K	IP23	L220xH80xW40mm

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

## Housing color option

Basic



Sanded Dark Grey  
**KAP 7037**





Silver Grey  
**KAP 9022**

Secondary




Sanded Black  
**RAL 9005**

## Diagram of instruction


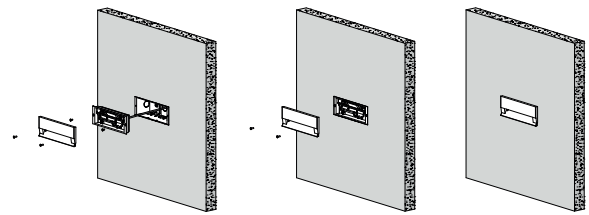


Recessed Installation



Surfaced Installation

## Dimensions

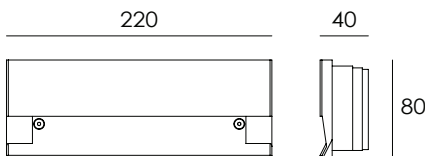

## Features



- The above picture – the supporting plate "A1" and "A2" are used for preventing deformation of the sleeve during the construction installation process.
- Please remove the supporting plate "A1" and "A2" from the mounting sleeve before the lamp installation.



• Low Voltage Type



• High voltage Type