

# WALL LIGHT



LX-WL-31-2

IP 66	IK 06	DC24V AC120-240V	TRIAC	PMW	1-10V	
----------	----------	---------------------	-------	-----	-------	--

				50000h
--	--	--	--	--------

## Wall Light

HOUSING MATERIAL 12# Die-casting dark grey powder coated aluminum  
t=60-80µm. Adhesion of ISO CLASS 1 / ASTM class 4B

LIGHT WINDOWS Tempered Glass . T=3mm

GASKET Tooling shaped seal

LED DRIVER Constant Voltage Input, Constant Current Output

OPERATING TEMPERATURE -20°C-40°C

POWER CABLE H05RN-F 2×1.0mm<sup>2</sup> L=0.3m (low voltage)  
H05RN-F 3×1.0mm<sup>2</sup> L=0.3m (high voltage)

DIMMABLE SUPPORT Triac PWM 1-10V Dali



**luxio**  
L I G H T I N G

[www.luxio-lighting.com](http://www.luxio-lighting.com)

## References

Reference	Led Power	Luminous flux	Input Voltage	CCT/K	IK Rating	IP Rating	Optics	Dimensions
LX-WL-31-2	1*16W	1225-1315lm	DC24V AC120-240V	3000K/6000K	IK06	IP66	12°/18°/32°	Ø90*L130*H177mm
	1*20W	1543-1753lm					10°/22°/38°	Ø120*L174*H230mm
	1*40W	2949-3338lm					10°/25°/38°	Ø160*L232*H270mm

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

## Housing color option

Basic



Sanded Dark Grey  
**KAP 7037**

Secondary



Sanded Black  
**RAL 9005**




Silver Grey  
**KAP 9022**

## Accessories (Optional)

### BEVEL CUT HOOD



### HONEYCOMB LOUVER

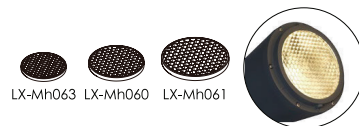

• The measured luminous flux data does not contain the honeycomb, and the data containing is reduced 20 to 30%.

## Overview




## Features




• Adjustable

## Dimensions


LX-WL-31-2-16W



LX-WL-31-2-20W

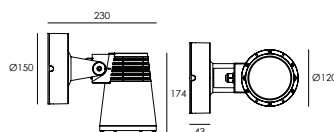

LX-WL-31-2-40W

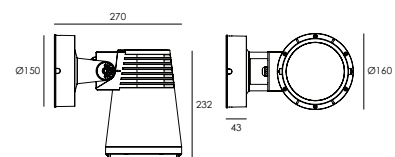

**luxio**  
L I G H T I N G

[www.luxio-lighting.com](http://www.luxio-lighting.com)