

# WALL LIGHT



LX-WL-41-2B

IP 65	IK 05/10	DC24V AC120-240V	TRIAC	PMW	1-10V	ball
----------	-------------	---------------------	-------	-----	-------	------

2 YEAR WARRANTY	NICHIA	CE	RoHS	50000h
-----------------------	--------	----	------	--------

## Wall Light


HOUSING MATERIAL Extruded aluminum alloy #6063

PAINTING Powder coating, T=60-80µm.  
Adhesion of ISO class 1/ASTM class 4B

REFLECTOR Optical reflector, efficiency ≥ 85%

OPERATING TEMPERATURE -20°C-40°C

POWER CABLE H05RN-F 2×1.0mm<sup>2</sup> L=0.3m (low voltage)  
H05RN-F 3×1.0mm<sup>2</sup> L=0.3m (high voltage)

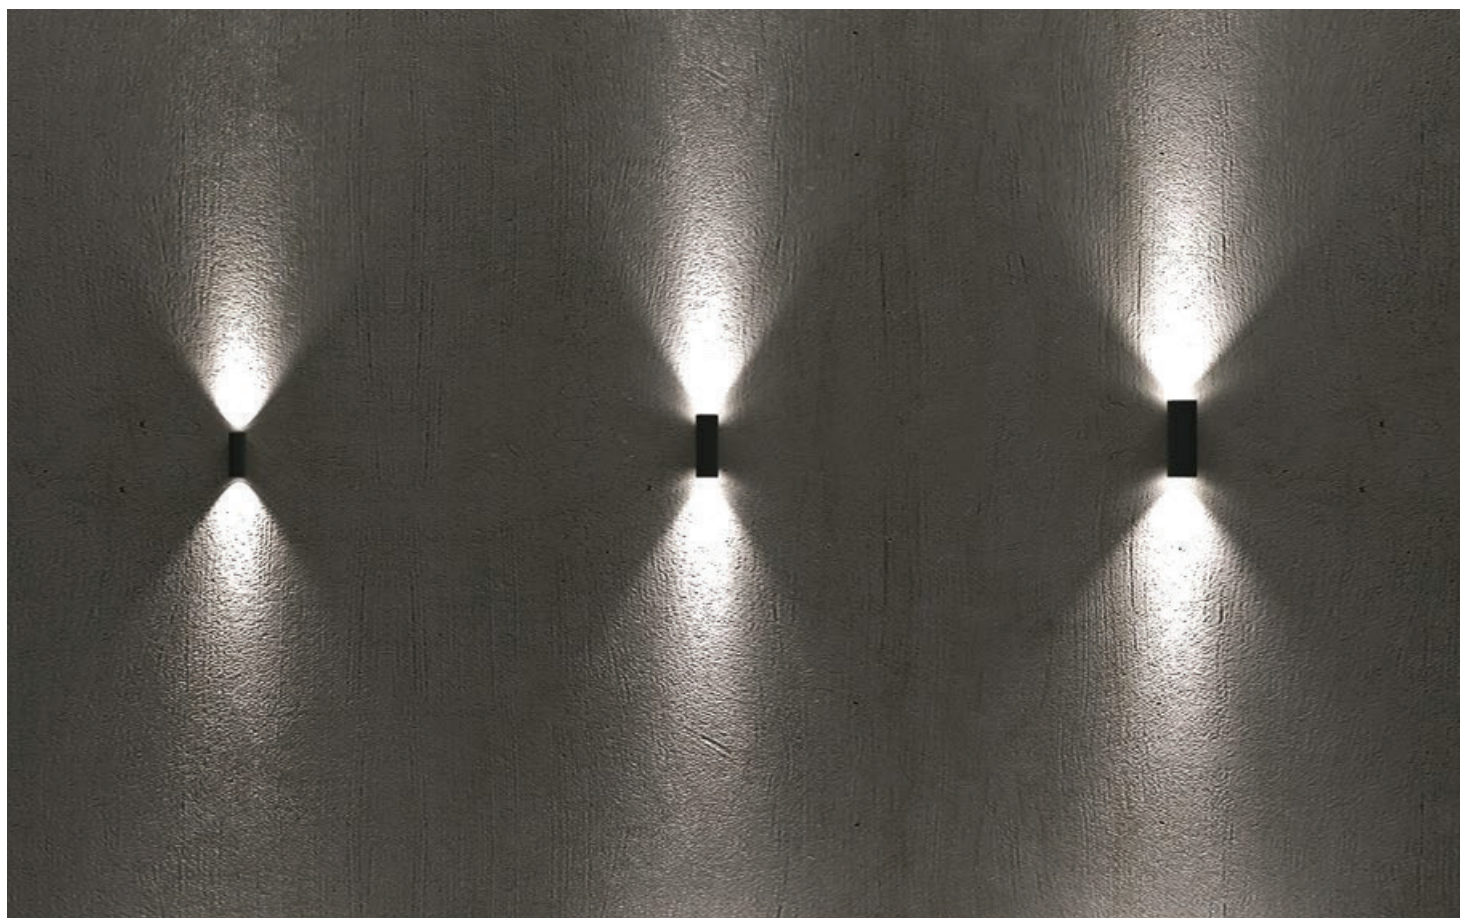

luxio  
L I G H T I N G

[www.luxio-lighting.com](http://www.luxio-lighting.com)

## References

Reference	Led Power	Luminous flux	Input Voltage	CCT/K	IK Rating	IP Rating	Optics	Light direction	Dimensions
LX-WL-41-2B	2*4.5W	2*282lm	DC24V/ AC120-240V	3000K/6000K	IK05	IP65	15°/24°/38°	Two side	Ø60*H180mm
	2*8W	2*986 - 2*1053lm					15°/24°/38°/60°		Ø80*H200mm
	2*12W	2*1079- 2*1289lm					12°/22°/35°/55°		Ø100*H280mm
	2*18W	2*1617- 2*1795m					10°/22°/38°		Ø130*H340mm

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

## Housing color option

Basic



Sanded Dark Grey  
**KAP 7037**

Secondary




Sanded Black  
**RAL 9005**




Silver Grey  
**KAP 9022**

## Diagram of instruction

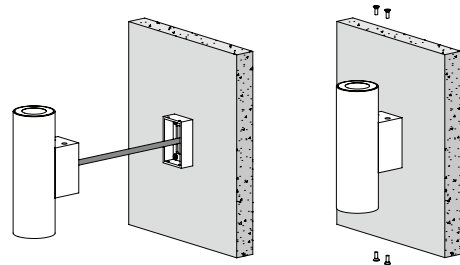


## Dimensions


LX-WL-41-2B-9W



LX-WL-41-2B-16W



LX-WL-41-2B-24W



LX-WL-41-2B-36W

