

WALL LIGHT



LX-WL-42-2

IP 65	IK 04/05	DC24V AC120-240V	TRIAC	PMW	1-10V	
2 YEAR WARRANTY	NICHIA	CE	RoHS	50000h		

Wall Light

HOUSING MATERIAL 12# Die-casting dark grey powder coated aluminum.
T=60-80µm. Adhesion of ISO class 1 / ASTM class 4B


LIGHT WINDOWS PMMA

GASKET Tooling shaped seal

LED DRIVER Main voltage 100-240V driver inside builded

OPERATING TEMPERATURE -20°C-40°C

POWER CABLE H05RN-F 2×1.0mm² L=0.3m (low voltage)
H05RN-F 3×1.0mm² L=0.3m (high voltage)

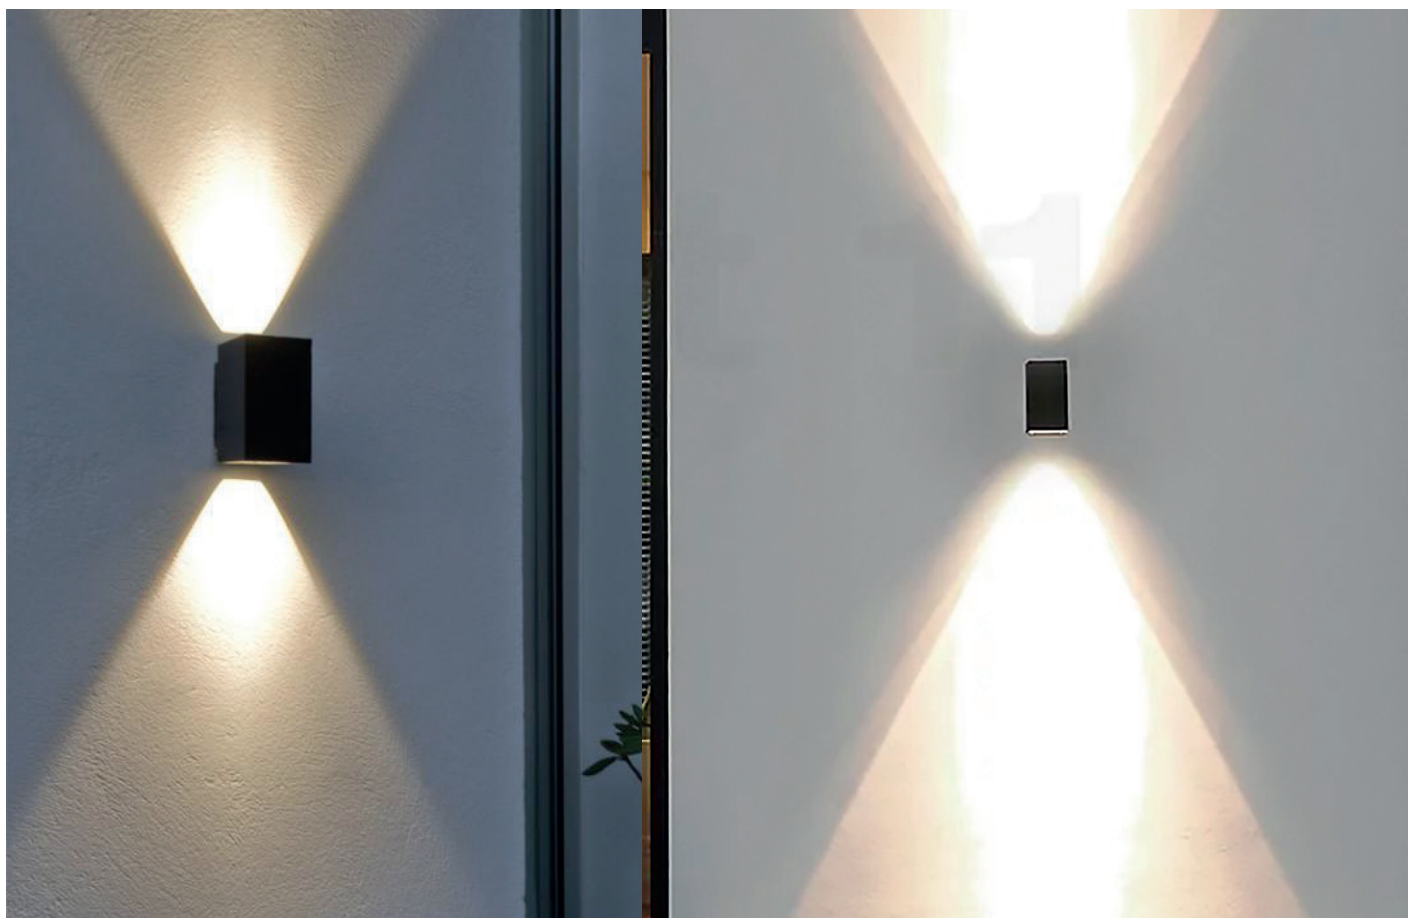

luxio
L I G H T I N G

www.luxio-lighting.com

References

Reference	Led Power	Luminous flux	Input Voltage	CCT/K	IK Rating	IP Rating	Optics	Light direction	Dimensions
LX-WL-42-2	1*6W	487lm	DC24V AC120-240V	3000K/6000K	IK04	IP65	18°/24°/32°	One side	70*70*H150mm
	1*18W	1758lm			IK05		12°/18°/32°		100*100*H204mm
	2*5W	2*602lm			IK04		18°/24°/32°	Two side	70*70*H195mm
	2*12W	2*1204lm			IK05		12°/18°/32°		100*100*H250mm

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Housing color option

Basic



Sanded Dark Grey
KAP 7037

Secondary



Sanded Black
RAL 9005




Silver Grey
KAP 9022

Dimensions

LX-WL-42-2-6W



LX-WL-42-2-18W

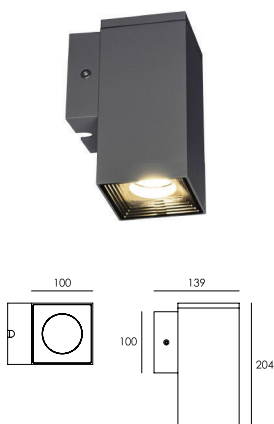

LX-WL-42-2-10W



LX-WL-42-2-24W

